

On Packing Low-Diameter Spanning Trees

Julia Chuzhoy*

Merav Parter†

Zihan Tan‡

June 12, 2020

Abstract

Edge connectivity of a graph is one of the most fundamental graph-theoretic concepts. The celebrated *tree packing* theorem of Tutte and Nash-Williams from 1961 states that every k -edge connected graph G contains a collection \mathcal{T} of $\lfloor k/2 \rfloor$ edge-disjoint *spanning* trees, that we refer to as a *tree packing*; the *diameter* of the tree packing \mathcal{T} is the largest diameter of any tree in \mathcal{T} . A desirable property of a tree packing, that is both sufficient and necessary for leveraging the high connectivity of a graph in distributed communication networks, is that its diameter is low. Yet, despite extensive research in this area, it is still unclear how to compute a tree packing, whose diameter is sublinear in $|V(G)|$, in a low-diameter graph G , or alternatively how to show that such a packing does not exist. In this paper, we provide first non-trivial upper and lower bounds on the diameter of tree packing. We start by showing that, for every k -edge connected n -vertex graph G of diameter D , there is a tree packing \mathcal{T} containing $\Omega(k)$ trees, of diameter $O((101k \log n)^D)$, with edge-congestion at most 2.

Karger’s edge sampling technique demonstrates that, if G is a k -edge connected graph, and $G[p]$ is a subgraph of G obtained by sampling each edge of G independently with probability $p = \Theta(\log n/k)$, then with high probability $G[p]$ is connected. We extend this result to show that the diameter of $G[p]$ is bounded by $O(k^{D(D+1)/2})$ with high probability. This immediately implies that for every k -edge connected n -vertex graph G of diameter D , there is a tree packing \mathcal{T} containing $\Omega(k/\log n)$ edge-disjoint trees of diameter at most $O(k^{D(D+1)/2})$ each.

We complement the above two results by showing that they are nearly tight: namely, that there is a k -edge connected graph of diameter $2D$, such that any packing of k/α trees with edge-congestion η contains at least one tree of diameter $\Omega((k/(2\alpha\eta D))^D)$, for any k, α and η .

Lastly, we show that if, for every pair u, v of vertices in a given graph G , there is a collection of k edge-disjoint paths connecting u to v , of length at most D each, then we can efficiently compute a tree packing of size k , diameter $O(D \log n)$, and edge-congestion $O(\log n)$.

We provide several applications of low-diameter tree packing in the settings of distributed network optimization. In particular, we show $o(\sqrt{n})$ -round algorithms for problems such as MST and approximate minimum cut for graphs with n^ϵ edge connectivity and constant diameter. Finally, we illustrate several applications to the setting of secure distributed algorithms in which the adversary is allowed to collide with $\Omega(k/\log n)$ edges in a k -edge connected graph.

*Toyota Technological Institute at Chicago. Email: cjulia@ttic.edu. Part of the work was done while the author was a Weston visiting professor in the Department of Computer Science and Applied Mathematics, Weizmann Institute of Science. Supported in part by NSF grant CCF-1616584.

†The Weizmann Institute of Science, Israel. Email: merav.parter@weizmann.ac.il. Supported in part by an ISF grant (no. 2084/18).

‡Computer Science Department, University of Chicago. Email: zihantan@uchicago.edu. Part of the work was done while the author was visiting the Department of Computer Science and Applied Mathematics, Weizmann Institute of Science. Supported in part by NSF grant CCF-1616584.

Contents

1	Introduction	1
1.1	Our Results	2
1.2	Open Problems	5
2	Preliminaries	6
3	Low-Diameter Tree Packing with Small Edge-Congestion: Proof of Theorem 1.1	7
4	Low-Diameter Packing of Edge-Disjoint Trees: Proof of Theorem 1.2	11
4.1	Bounding the Diameter of a Random Subgraph: Proof of Theorem 4.1	11
4.2	Proof of Theorem 4.4	16
5	Lower Bound: Proof of Theorem 1.3	19
6	Tree Packing for (k, D)-Connected Graphs: Proof of Theorem 1.4	22
6.1	Proof of Theorem 6.1	25
6.2	Proof of Claim 6.4	30
6.3	Proof of Claim 6.5	31
7	Applications to Distributed Computation	33
7.1	Distributed Approximate Verification of the Edge Connectivity	34
7.2	Improved Low-Congestion Shortcuts with Applications	39
7.2.1	Applications of the Improved Shortcuts	43
7.2.2	Lower Bound of Shortcuts	44
7.3	Improved Bounds for the Information Dissemination Task	47
7.4	Implications to Secure Distributed Computation	49
7.5	Useful Lemmas for Bounded Independence	55

1 Introduction

Edge connectivity of a graph is one of the most basic graph theoretic parameters, with various applications to network reliability and information dissemination. A key tool for leveraging high edge connectivity of a given graph is *tree packing*: a large collection of spanning trees that are (nearly) edge-disjoint. A celebrated result of Tutte [Tut61] and Nash-Williams [NW61] shows that for every k -edge connected graph, there is a tree packing \mathcal{T} containing $\lfloor k/2 \rfloor$ edge-disjoint trees. This beautiful theorem has numerous algorithmic applications, but unfortunately it provides no guarantee on the diameter of the individual trees in \mathcal{T} . In the worst case, trees in \mathcal{T} may have diameter that is as large as $\Omega(|V(T)|)$, even if the diameter of the original graph is very small. Given a graph G and a collection \mathcal{T} of trees in G , we say that the trees in \mathcal{T} are *edge-disjoint* iff every edge of G lies in at most one tree of \mathcal{T} , and we say that they cause *edge-congestion* η iff every edge of G lies in at most η trees of \mathcal{T} . The *diameter* of a tree-packing \mathcal{T} is the maximum diameter of any tree in \mathcal{T} .

The diameter of a graph is a central graph measure that determines the round complexity of distributed algorithms for various central graph problems, including minimum spanning tree, global minimum cut, shortest s - t path, and so on. All these problems admit a trivial lower bound of $\Omega(D)$ for the round complexity (where D is the diameter of the graph), and in fact a stronger lower bound of $\Omega(D + \sqrt{n})$, which is almost tight for general n -vertex graphs, that was shown by Das-Sarma et al. [SHK⁺12]. Despite attracting a significant amount of attention over the last decade (see e.g., [PT11, GK13, NS14, CGK14, CHGK14, Kuh14, Gha15a, CHGG⁺15, Dor18, DHNS19]), algorithms that exploit large edge connectivity of the input graph in the distributed setting are quite rare. The only examples that we are aware of are recent algorithms for minimum cut by Daga et al. [DHNS19] and by Ghaffari et al. [GNT20].

Censor-Hillel et al. [CGK14] presented several distributed algorithms, that, given a k -edge connected n -vertex graph of diameter D , computes a fractional tree packing of $\Omega(k/\log n)$ trees that are fractionally edge-disjoint¹ in $\tilde{O}(D + \sqrt{n})$ rounds. These trees have been used to parallelize the flow of information, obtaining nearly optimal *throughput* for store-and-forward algorithms². However, as these trees might have diameter as large as $\Omega(n)$ in the worst case, it is not clear how to use them in order to improve the *round complexity* of the problem at hand, as opposed to improving the throughput. In particular, in terms of optimizing the number of communication rounds, it may still be preferable to send the entire information over a single BFS tree rather than spreading it over *many* trees of potentially *large* diameter.

The problem of computing a low-diameter tree packing was studied later by Ghaffari [Gha15a] from the perspective of optimization. Specifically, he studied the multi-message broadcast problem, where a designated source vertex is required to send k messages to all other nodes in the network. Denoting by $\text{OPT}(G)$ the minimum number of rounds required for the broadcast on an input graph G , he constructed a tree packing of size k , where both the diameter and the congestion are bounded by $\tilde{O}(\text{OPT}(G))$. While this approach provides a nearly optimal broadcast scheme, it does not provide absolute upper bounds on the diameter of the tree packing, and moreover, the

¹In the fractional setting, each tree T in the packing has a weight $w(T)$ and for each edge e , the sum of weights of all trees that contain e is at most 1.

²In this class of algorithms, the nodes can only forward the messages they receive (e.g., network coding is not allowed).

congestion caused by the tree packing can be large.

A recent work of Ghaffari and Kuhn [GK13] provides the following negative result for packing low-diameter trees into a graph: they show that for any large enough n and any $k \geq 1$, there is a k -edge-connected n -vertex graph of diameter $\Theta(\log n)$, such that, in any partitioning of the graph into spanning subgraphs, all but $O(\log n)$ of the subgraphs have diameter $\Omega(n/k)$. In light of this result, it is natural to consider the following key question:

(1) *Is it possible to compute a tree packing whose diameter is strongly sublinear in $|V(G)|$, provided that the diameter of the input graph G is sublogarithmic in $|V(G)|$?*

Our second key question aims at crystallizing the main challenge to computing low-diameter tree packing. So far, we have compared the diameter of the tree packing to the diameter of the original graph. However, as observed above, the results of [GK13] indicate that there may be a large gap between these two measures, even for graphs whose diameter is logarithmic in n . A more natural reference point is the following. We say that a graph G is (k, D) -connected, iff for every pair $u, v \in V(G)$ of distinct vertices, there are k edge-disjoint paths connecting u to v in G , such that the length of each path is bounded by D . Clearly, if there is a tree packing of edge-disjoint trees of diameter at most D into G , then G must be (k, D) -connected. The question is whether the reverse is also true, if we allow a small congestion and a small slack in the diameter of the trees. The celebrated result of Tutte and Nash-Williams shows that, if every pair of vertices in G has k edge-disjoint paths connecting them, then there are $\lfloor k/2 \rfloor$ edge-disjoint spanning trees in G . However, this result is not length-preserving, in the sense that the tree paths may be much longer than the original paths connecting pairs of vertices. Our goal is then to provide such a length-preserving transformation from collections of short edge-disjoint paths connecting pairs of nodes in G to a low-diameter tree packing.

(2) *Given a (k, D) -connected graph G , can one obtain a tree packing of $\tilde{\Omega}(k)$ trees of diameter $\tilde{O}(D)$ into G , with small edge-congestion?*

In this paper, we address both questions. For the first question, we show two efficient algorithms, that, given a k -edge connected n -vertex graph G of diameter at most D , construct a low-diameter tree packing. We complement this result by an almost matching lower bound. We address the second question by providing an efficient algorithm, that, given a (k, D) -connected graph G , computes a collection of k spanning trees of diameter at most $O(D \log n)$ each, that cause edge-congestion of $O(\log n)$.

1.1 Our Results

Our graph-theoretic results consider two main settings: in the first setting, the input graph is k -edge connected, and has diameter at most D ; in the second setting, the input graph is (k, D) -connected. We only consider unweighted graphs, that is, all edge lengths are unit. Graphs are allowed to have parallel edges, unless we explicitly state that the graph is simple. Throughout the paper, we use the term *efficient algorithm* to refer to a sequential algorithm whose running time is polynomial in its input size.

Packing Trees into Low-Diameter Graphs. We prove the following two theorems that allow us to pack low-diameter trees into low-diameter graphs.

Theorem 1.1. *There is an efficient randomized algorithm, that, given any positive integers D, n, k , and an n -vertex k -edge-connected graph G of diameter at most D , computes a collection $\mathcal{T}' = \{T'_1, \dots, T'_{\lfloor k/2 \rfloor}\}$ of $\lfloor k/2 \rfloor$ spanning trees of G , such that each edge of G appears in at most two of the trees in \mathcal{T}' , and, with high probability, each tree $T'_i \in \mathcal{T}'$ has diameter $O((101k \ln n)^D)$.*

As we show later, the diameter bound of Theorem 1.1 is close to the best possible. Unfortunately, the trees in the packing provided by Theorem 1.1 may share edges. Next, we generalize the classical result of Karger [Kar99] to obtain a packing of completely edge-disjoint trees of small diameter, in the following theorem.

Theorem 1.2. *There is an efficient randomized algorithm that, given an n -vertex k -edge-connected graph G of diameter at most D , such that $k > 1000 \ln n$, computes a collection $\{T_1, \dots, T_r\}$ of $r = \Omega(k/\ln n)$ edge-disjoint spanning trees of G , such that with probability $1 - 1/\text{poly}(n)$, each resulting tree T_i has diameter $O(k^{D(D+1)/2})$.*

We note that while the diameter bound in Theorem 1.2 is slightly weaker than that obtained in Theorem 1.1, and the number of the spanning trees is somewhat lower, its advantage is that the resulting trees are guaranteed to be edge-disjoint. Moreover, the algorithm in Theorem 1.2 is very simple: we construct r graphs G_1, \dots, G_r with $V(G_i) = V(G)$ for all i , by sampling every edge of G into one of these graphs independently. We then compute a spanning tree T_i in each such graph G_i , and show that its diameter is suitably bounded. As such, this algorithm is easy to use in the distributed setting.

Lastly, we show that our upper bounds are close to the best possible if $k \gg D$, by proving the following lower bound.

Theorem 1.3. *For all positive integers n, k, D, η, α such that $k/(4D\alpha\eta)$ is an integer and $n \geq 3k \cdot \left(\frac{k}{2D\alpha\eta}\right)^D$, there exists a k -edge connected simple graph G on n vertices of diameter at most $2D + 2$, such that, for any collection $\mathcal{T} = \{T_1, \dots, T_{k/\alpha}\}$ of k/α spanning trees of G that causes edge-congestion at most η , some tree $T_i \in \mathcal{T}$ has diameter at least $\frac{1}{4} \cdot \left(\frac{k}{2D\alpha\eta}\right)^D$.*

Note that, in particular, any collection \mathcal{T} of $\Omega(k)$ trees that are either edge-disjoint, or cause a constant edge-congestion, must contain a tree of diameter $\Omega\left(\left(\frac{k}{cD}\right)^D\right)$ for some constant c . Even if we are willing to allow a polylogarithmic edge-congestion, and to settle for $\Theta(k/\text{poly log } n)$ trees, at least one of the trees must have diameter $\Omega\left(\left(\frac{k}{D \text{poly log } n}\right)^D\right)$. Moreover, we show that the lower bound from Theorem 1.3 continues to hold even for the weaker notion of *edge-independent* trees³, introduced in [IR88].

³A collection \mathcal{T} of spanning trees is edge-independent, iff all trees in \mathcal{T} are rooted at the same vertex v^* , and for every vertex $v \in V(G)$, if we denote by $\mathcal{P}(v)$ the collection of paths that contains, for each tree $T \in \mathcal{T}$, the unique path connecting v to v^* in T , then all paths in $\mathcal{P}(v)$ are edge-disjoint.

Packing Trees into (k, D) -connected Graphs. We next consider (k, D) -connected graphs and show an algorithm that computes a tree packing, that is near-optimal in both the number of trees and in the diameter.

Theorem 1.4. *There is an efficient randomized algorithm, that, given any positive integers D, k, n with $k \leq n$, and a (k, D) -connected n -vertex graph G , computes a collection $\mathcal{T} = \{T_1, \dots, T_k\}$ of k spanning trees of G , such that, for each $1 \leq \ell \leq k$, tree T_ℓ has diameter at most $O(D \log n)$, and with probability at least $1 - 1/\text{poly}(n)$, each edge of G appears in $O(\log n)$ trees of \mathcal{T} .*

Improved Distributed Algorithms for Highly Connected Graphs. We present several applications of low-diameter tree packing in the standard CONGEST model of distributed computation [Pel00]. By the proof of Theorem 1.2 and the $O(\log n)$ -approximation algorithm for edge connectivity by [GK13], we obtain the following result.

Theorem 1.5. *There is a randomized distributed algorithm, that, given an n -vertex graph G of constant diameter $D = O(1)$ and an integer λ , with high probability solves the problem of $O(\log n)$ -approximate verification of λ -edge connectivity in G in $\text{poly}(\lambda \cdot \log n)$ rounds.*

This improves upon the state of the art bound of $O(\sqrt{n})$ for graphs with constant diameter $D \geq 3$, and $\lambda \leq n^c$ for some positive constant $c < 1/(2D^2)$. From now on, we restrict our attention to k -edge connected graphs with a constant diameter $D = O(1)$. We employ the modular approach for distributed optimization introduced by Ghaffari and Haeupler in [GH16a] which is based on the notion of *low-congestion shortcuts*. Roughly speaking, these shortcuts augment vertex-disjoint connected subgraphs by adding nearly-edge disjoint subsets of “shortcut” edges (that is, edges that reduce the diameter of each subgraph). Using our tree packing construction, we provide improved shortcuts for highly connected graphs of small diameter. This immediately leads to $o(\sqrt{n})$ -round algorithms for several classical graph problems. For example, we prove the following:

Theorem 1.6. *There is a randomized distributed algorithm, that, given a k -edge connected weighted n -vertex graph G of diameter D , such that the nodes know an $O(\log n)$ approximation of k , computes an MST of G in $\tilde{O}(\min\{\sqrt{n/k} + n^{D/(2D+1)}, n/k\})$ rounds with high probability.*

If the nodes do not know an $O(\log n)$ -approximation of the value of k , then such an approximation can be computed in $\text{poly}(k \log n)$ rounds for $D = O(1)$ using Theorem 1.5, w.h.p. For general graphs (of an arbitrary connectivity) with diameter $D = 3, 4$, Kitamura et al. [KKOI19] showed nearly optimal constructions of MST’s (based on shortcuts) with round complexities of $\tilde{O}(n^{1/4})$ and $\tilde{O}(n^{1/3})$ respectively. Turning to lower bounds, we slightly modify the construction of Lotker et al. [LPP06] to obtain a lower bound of $\Omega((n/k)^{1/3})$ rounds for computing an MST in k -edge connected graphs of diameter 4, assuming that $k = O(n^{1/4})$.

Finally, we consider the basic task of *information dissemination*, where a given source vertex s is required to send N bits of information to the designated target vertex t in a k -edge connected n -vertex graph. This problem was first addressed in [GK13], who showed a lower bound of $\Omega(\min\{N/\log^2 n, n/k\})$ rounds, provided that the diameter of the graph is $\Theta(\log n)$. Using our low-diameter tree packing we obtain the first improved upper bounds for sublogarithmic diameter. We also show a new lower bound for simple store-and-forward algorithms, for the regime where $D = o(\log n)$.

Theorem 1.7. *There is a randomized distributed algorithm, that, given any k -edge connected n -vertex graph G of diameter D with a source vertex s and a destination vertex t , sends an input sequence of N bits from s to t . The number of rounds is bounded by $\tilde{O}(N^{1-1/(D+1)} + N/k)$ with high probability. In addition, for all integers n, N, D and $k \leq n$, there exists a k -edge connected n -vertex graph $G = (V, E)$ of diameter $2D$, and a pair s, t of its vertices, such that sending N bits from s to t in a store-and-forward manner requires at least $\Omega(\min\{(N/(D \log n))^{1-1/(D+1)}, n/k\} + N/k + D)$ rounds.*

Applications to Secure Distributed Computation. Recently, Parter and Yogev [PY19] presented a general simulation result that converts any non-secure distributed algorithm to an equivalent secure algorithm, while paying a small overhead in the number of rounds. This transformation is based on the combinatorial graph structure of low-congestion cycle cover, namely, a collection of nearly edge-disjoint short cycles that cover all edges in the graph. The security provided by [PY19] was limited to adversaries who can manipulate at most one edge of the graph in a given round; in fact if the graph is only 2-edge connected, no stronger security guarantees, in terms of the number of edges that an adversary is allowed to corrupt is possible. In this paper we provide technical tools for handling stronger adversaries, who collude with $f(k)$ edges in a k -edge connected graph in each given round. In order to do so, we define a stronger variant of cycle cover that is adapted to the highly connected setting. This generalization is formalized by the notion of k -connected cycle cover, in which each edge in the graph is covered by k almost-disjoint cycles. Our key contribution is an algorithm that transforms any tree packing with k trees of diameter D into a $(k - 1)$ -connected cycle cover with cycle length $O(D \log n)$ and congestion $\tilde{O}(k \log n)$. This yields a simple secure simulation of distributed algorithms in the presence of an adversary who colludes with $O(k/\log n)$ edges of the graph in each round⁴. Finally, we also use low-diameter tree packing to provide a simple store-and-forward algorithm for the problem of secure broadcast.

1.2 Open Problems

For brevity, let us say that a collection \mathcal{T} of spanning trees of a (k, D) -connected graph G is an (α, D') -packing iff $|\mathcal{T}| \geq k/\alpha$ and the diameter of every tree in \mathcal{T} is at most D' . A major remaining open question is: for which values of α and D' can we guarantee the existence of an (α, D') -packing \mathcal{T} of edge-disjoint spanning tree in every (k, D) -connected graph. In particular, is the following statement true: every (k, D) -connected graph G contains a collection of $\Omega(k/\text{poly log } n)$ edge-disjoint trees of diameter $O(D \cdot \text{poly log } n)$ each. The only upper bounds that we have are the ones guaranteed by Theorem 1.2, and we do not have any lower bounds. We also do not have any upper bounds, except for those guaranteed by Theorem 1.1, if we allow a constant, or more generally any sub-logarithmic congestion. Additionally, obtaining an analogue of the algorithm from Theorem 1.4 in the distributed setting remains a very interesting open question.

Finally, most of our results are mainly meaningful for the setting where $k = \Omega(\log n)$. It will be very interesting to consider the case of small connectivity $k = O(1)$. One can show that any k -edge connected graph with $k = O(1)$ of diameter D is a $(k, \text{poly}(D))$ -connected graph. Is it possible to show that any k -edge-connected graph of diameter D , for some constant $k \geq 3$, has at least two edge-disjoint trees of depth at most $\text{poly}(D)$?

⁴We note that an adversary may choose a different set of $O(k/\log n)$ edges to listen to or to corrupt in each round.

Organization. We start with preliminaries in Section 2. We provide the proof of Theorem 1.1 in Section 3, the proof of Theorem 1.2 in Section 4, the proof of Theorem 1.3 in Section 5, and the proof of Theorem 1.4 in Section 6. We discuss applications of our graph theoretic results to distributed computation in Section 7.

2 Preliminaries

We use the notation \log for logarithms to the base of 2. All graphs are finite and they do not have loops. By default, graphs are allowed to have parallel edges; graphs without parallel edges are explicitly called simple graphs.

Let $G = (V, E)$ be a graph. For two disjoint subsets of its vertices $A, B \subseteq V$, we denote by $E_G(A, B)$ the set of edges in G that have one endpoint in A and the other endpoint in B , and denote by $\delta_G(A)$ the set of edges in G that have exactly one endpoint in A . For a pair $u, v \in V(G)$ of vertices of G , we denote by $\text{dist}_G(u, v)$ the length of the shortest path connecting u to v in G , and we denote by $\text{diam}(G)$ the diameter of G , namely $\text{diam}(G) = \max_{u, v \in V} \text{dist}_G(u, v)$. For a path P in G , we denote by $|P|$ its length, that is, the number of edges in P . For a vertex $u \in V(G)$, let $\Gamma_G(u)$ be the set of neighbors of u in G .

For two graphs G, H we define their *union graph* $G \cup H$ to be the graph whose vertex set is $V(G) \cup V(H)$ and whose edge set is $E(G) \cup E(H)$ (note that we allow $V(G) \cap V(H)$ to be non-empty).

For a real number $p \in [0, 1]$, let $\mathcal{D}(G, p)$ be the distribution of graphs, where the vertex set of the resulting graph is $V(G)$, and each edge of G is included in the graph with probability p independently from other edges.

We say that two paths P, P' are *edge-disjoint*, iff $E(P) \cap E(P') = \emptyset$. We say that two paths P, P' are *internally disjoint*, iff for every vertex $v \in V(P) \cap V(P')$, v is an endpoint of both paths. Given a set $\mathcal{P} = \{P_1, \dots, P_r\}$ of paths of G , we say that the paths of \mathcal{P} are *edge-disjoint* iff every edge of G belongs to at most one path of \mathcal{P} , and we say that the paths of \mathcal{P} are *internally disjoint* iff every pair of paths in \mathcal{P} are internally disjoint. We say that the set \mathcal{P} of paths causes *congestion* η iff every edge $e \in E(G)$ belongs to at most η paths in \mathcal{P} .

For a positive integer k , we say that a graph $G = (V, E)$ is *k-edge-connected* iff, for every subset $E' \subseteq E$ of at most $k - 1$ edges, $G \setminus E'$ is connected. Equivalently, G is *k-edge-connected* iff for every pair $u, v \in V$ of its vertices, there is a set of k edge-disjoint paths in G connecting u to v . We will also use the following stronger notion of connectedness.

Definition 1 ($((k, D)$ -connectivity). *Let G be a graph, and let k, D be two positive integers. We say that G is $((k, D)$ -connected iff for every pair $u, v \in V(G)$ of its nodes, there are k edge-disjoint paths in G connecting u to v , such that the length of each of these paths is at most D .*

Let T be a tree rooted at r . For each integer $i \geq 0$, we say that a node $v \in V(T)$ is at the i th level of T if the length of the unique path connecting v to r in T is i . We let $V_i(T)$ be the set of all nodes that lie on the i th level of the tree T , and we denote $V_{\leq i}(T) = \bigcup_{t=0}^i V_t(T)$. Therefore, the root lies at level 0, the children of the root are at level 1 and so on. For a collection $\mathcal{T} = \{T_1, \dots, T_r\}$ of spanning trees of G , we say that the trees of \mathcal{T} are *edge-disjoint* if every edge of G belongs to at

most one tree of \mathcal{T} . We say that the trees of \mathcal{T} are *edge-independent*, if all the trees are rooted at a same vertex $v_0 \in V(G)$, and for every vertex $v \in V(G) \setminus \{v_0\}$, if we denote by $\mathcal{P}(v)$ the set of paths that contains, for each tree $T \in \mathcal{T}$, the unique path connecting v to v_0 in T , then all paths in $\mathcal{P}(v)$ are edge-disjoint. We say that the set \mathcal{T} of trees causes *congestion* η iff every edge $e \in E(G)$ belongs to at most η trees in \mathcal{T} .

Flows and cuts. Let \mathcal{P} be the set of all paths in G . A *flow* f in G is defined to be an assignment of non-negative values $\{f(P)\}_{P \in \mathcal{P}}$ to all paths $P \in \mathcal{P}$. A path $P \in \mathcal{P}$ is called a *flow-path* of f iff $f(P) > 0$. The *value* of the flow f is $\sum_{P \in \mathcal{P}} f(P)$. Let P be a flow-path that originates at $u \in V(G)$ and terminates at $u' \in V(G)$. We say that the node u *sends* $f(P)$ units of flow to u' along the path P . For each edge $e \in E(G)$, we define the congestion of the flow f on the edge e to be $\sum_{P \in \mathcal{P}: e \in P} f(P)$, namely the total amount of flow of f through e . The total congestion of flow f is the maximum congestion of f on any edge of G . A *cut* in a graph G is a bipartition of its vertex set V into non-empty subsets. The *value* of a cut $(S, V \setminus S)$ is $|E_G(S, V \setminus S)|$.

3 Low-Diameter Tree Packing with Small Edge-Congestion: Proof of Theorem 1.1

In this section we provide the proof of Theorem 1.1.

We start by showing that, if we are given a graph G , and a collection $\{T_1, \dots, T_k\}$ of edge-disjoint spanning trees of G , such that the diameter of the tree T_k is at most $2D$ (but other trees may have arbitrary diameters), then we can efficiently compute another collection $\{T'_1, \dots, T'_{k-1}\}$ of edge-disjoint spanning trees of G , such that the diameter of each resulting tree T'_i is bounded by $O((101k \ln n)^D)$ with high probability.

Theorem 3.1. *There is an efficient randomized algorithm, that, given any positive integers D, k, n , an n -vertex graph G , and a collection $\{T_1, \dots, T_k\}$ of k spanning trees of G , such that the trees T_1, \dots, T_{k-1} are edge-disjoint, and the diameter of T_k is at most $2D$, computes a collection $\{T'_1, \dots, T'_{k-1}\}$ of edge-disjoint spanning trees of G , such that, with probability at least $1 - 1/\text{poly}(n)$, for each $1 \leq i \leq k - 1$, the diameter of tree T'_i is bounded by $O((101k \ln n)^D)$.*

Theorem 1.1 easily follows by combining Theorem 3.1 with the results of Kaiser [Kai12], who gave a short elementary proof of the tree-packing theorem of Tutte [Tut61] and Nash-Williams [NW61]. His proof directly translates into an efficient algorithm, that, given a k -edge connected graph G , computes a collection of $\lfloor k/2 \rfloor$ edge-disjoint spanning trees of G . In order to complete the proof of Theorem 1.1, we use the algorithm of Kaiser [Kai12] to compute an arbitrary collection $\mathcal{T} = \{T_1, \dots, T_{\lfloor k/2 \rfloor}\}$ of edge-disjoint spanning trees of G , and compute another arbitrary BFS tree T^* of G . Since the diameter of G is at most D , the diameter of T^* is at most $2D$. We then apply Theorem 3.1 to the collection $\{T_1, \dots, T_{\lfloor k/2 \rfloor}, T^*\}$ of spanning trees, to obtain another collection $\mathcal{T}' = \{T'_1, \dots, T'_{\lfloor k/2 \rfloor}\}$ of spanning trees, such that each edge of G belongs to at most 2 trees of \mathcal{T}' , and with high probability, the diameter of each tree in \mathcal{T}' is at most $O((101k \ln n)^D)$. We note that, since we allow parallel edges, the trees in the set $\{T_1, \dots, T_{\lfloor k/2 \rfloor}, T^*\}$ are edge-disjoint in graph $G \cup E(T^*)$.

The main technical tool that we use in order to prove of Theorem 3.1 is the following theorem, that

allows one to “fix” a diameter of a connected graph using a low-diameter tree.

Theorem 3.2. *Let H be a connected graph with $|V(H)| \leq n$, and let T be a rooted tree of depth D , such that $V(T) = V(H)$. For a real number $0 < p < 1$, let R be a random subset of the edges of T , where each edge $e \in E(T)$ is added to R independently with probability p . Then with probability at least $1 - \frac{D}{n^{48}}$, the diameter of the graph $H \cup R$ is at most $(\frac{101 \ln n}{p})^D$.*

Theorem 3.1 easily follows from Theorem 3.2: For each $1 \leq i < k$, we construct a graph G_i as follows. Start with $G_i = T_i$ for all $1 \leq i \leq k$. Compute a random partition E_1, \dots, E_{k-1} of the edges of $E(T_k)$, by adding each edge $e \in E(T_k)$ to a set E_i chosen uniformly at random from $\{E_1, \dots, E_{k-1}\}$ independently from other edges. Using Theorem 3.2 with $p = 1/(k-1)$, it is immediate to see that with high probability, the diameter of each resulting graph G_i is bounded by $O((101k \ln n)^D)$. We then let T'_i be a BFS tree of graph G_i , rooted at an arbitrary vertex. In order to complete the proof of Theorem 1.1, it is now enough to prove Theorem 3.2.

Proof of Theorem 3.2. Recall that we are given a connected graph H with $|V(H)| \leq n$, and a rooted tree T of depth D , such that $V(T) = V(H)$, together with a parameter $0 < p < 1$. We let R be a random subset of $E(T)$, where each edge $e \in E(T)$ is added to R independently with probability p . Our goal is to show that the diameter of the graph $H \cup R$ is at most $(\frac{101 \ln n}{p})^D$ with probability at least $1 - \frac{D}{n^{48}}$. Denote $V = V(H) = V(T)$. For each $0 \leq i \leq D$, let V_i be the set of nodes lying at level i of the tree T (that is, at distance i from the tree root), and denote $V_{\leq i} = \bigcup_{t=0}^i V_t$. Let $H' = H \cup R$.

We say that a node $x \in V$ is *good* if either (i) $x \in V_{\leq D-1}$; or (ii) $x \in V_D$, and there is an edge in R connecting x to a node in V_{D-1} . We assume that $V = \{v_1, \dots, v_n\}$, where the vertices are indexed in an arbitrary order. Given an ordered pair (x, x') of vertices in H , and a path P connecting x to x' , let $\sigma(P)$ be a sequence of vertices that lists all the vertices appearing on P in their natural order, starting from vertex x (so in a sense, we think of P as a directed path). For an ordered pair $(x, x') \in V$ of vertices, let $P_{x,x'}$ be shortest path connecting x to x' in H , and among all such paths P , choose the one whose sequence $\sigma(P)$ is smallest lexicographically. Observe that $P_{x,x'}$ is unique, and, moreover, if some pair u, u' of vertices lie on $P_{x,x'}$, with u lying closer to x than u' on $P_{x,x'}$, then the sub-path of $P_{x,x'}$ from u to u' is precisely $P_{u,u'}$.

Let $M = \frac{50 \ln n}{p}$. For a pair x, x' of vertices of V , we let $B(x, x')$ be the bad event that length of $P_{x,x'}$ is greater than M and there is no good internal node on $P_{x,x'}$. Notice that event $B(x, x')$ may only happen if every inner vertex on $P_{x,x'}$ lies in V_D , and for each such vertex, the unique edge of T that is incident to it was not added to R . Therefore, the probability that event $B(x, x')$ happens for a fixed pair x, x' of vertices is at most $(1-p)^M = (1-p)^{(50 \ln n)/p} \leq n^{-50}$. Let B be the bad event that $B(x, x')$ happens for some pair $x, x' \in V$ of nodes. From the union bound over all pairs of nodes in V , the probability of B is bounded by n^{-48} .

Recall that H is a subgraph of H' and $\text{dist}_H(\cdot, \cdot)$ is the shortest-path distance metric on H . We use the following immediate observation.

Observation 3.3. *If the event B does not happen, then for every node $x \in V$, there is a good node $x' \in V$ such that $\text{dist}_H(x, x') \leq M$.*

We prove Theorem 3.2 by induction on D . The base of the induction is when $D = 1$. In this case, T is a star graph. Let c denote the vertex that serves as the center of the star. For any pair $x_1, x_2 \in V$

of vertices, we denote by x'_1 the good node that is closest to x_1 in H , and we define x'_2 similarly for x_2 . Notice that, from the definition of good vertices, either $x'_1 = c$, or it is connected to c by an edge of R , and the same holds for x'_2 . Therefore, $\text{dist}_{H'}(x'_1, x'_2) \leq 2$ must hold. If the event B does not happen, then, since H is a subgraph of H' , $\text{dist}_{H'}(x_1, x_2) \leq \text{dist}_{H'}(x_1, x'_1) + \text{dist}_{H'}(x'_1, x'_2) + \text{dist}_{H'}(x'_2, x_2) \leq \text{dist}_H(x_1, x'_1) + \text{dist}_{H'}(x'_1, x'_2) + \text{dist}_H(x_2, x'_2) \leq 2M + 2 \leq \frac{101 \ln n}{p}$. Therefore, with probability at least $1 - n^{-48}$, $\text{dist}_{H'}(x_1, x_2) \leq \frac{101 \ln n}{p}$.

Assume now that Theorem 3.2 holds for every connected graph H and every tree T of depth at most $D - 1$, with $V(T) = V(H)$. Consider now some connected graph H , and a rooted tree T of depth D , with $V(T) = V(H)$. We partition the edges of $E(T)$ into two subsets: set E_1 contains all edges incident to the vertices of V_D , and set E_2 contains all remaining edges. Let $E'_1 = E_1 \cap R$, and let $E'_2 = E_2 \cap R$. Notice that the definition of good vertices only depends on the edges of E'_1 , and so the event B only depends on the random choices made in selecting the edges of E'_1 , and is independent from the random choices made in selecting the edges of E'_2 .

Let L be a subgraph of H' , obtained by starting with $L = H$, and then adding all edges of E'_1 to the graph. Finally, we define a new graph \hat{H} , whose vertex set is $V_{\leq D-1}$, and there is an edge between a pair of nodes w, w' in \hat{H} iff the distance between w and w' in L is at most $M + 2$. We also let \hat{T} be the tree obtained from T , by discarding from it all vertices of V_D and all edges incident to vertices of V_D . Observe that $V(\hat{H}) = V(\hat{T}) = V_{\leq D-1}$. The idea is to use the induction hypothesis on the graph \hat{H} , together with the tree \hat{T} . In order to do so, we need to prove that \hat{H} is a connected graph, which we do next.

Observation 3.4. *If the event B does not happen, then graph \hat{H} is connected.*

Proof: Assume that the event B does not happen, and assume for contradiction that graph \hat{H} is not connected. Let $\mathcal{C} = \{C_1, \dots, C_r\}$ be the set of all connected components of graph \hat{H} . For every pair C_i, C_j of distinct components of \mathcal{C} , consider the set $\mathcal{P}_{i,j} = \{P_{x,x'} \mid x \in V(C_i), x' \in V(C_j)\}$ of paths (recall that $P_{x,x'}$ is the shortest path connecting x to x' in H with $\sigma(P_{x,x'})$ lexicographically smallest among all such paths). We let $P_{i,j}$ be a shortest path in $\mathcal{P}_{i,j}$. Choose two distinct components $C_i, C_j \in \mathcal{C}$, whose path $P_{i,j}$ has the shortest length, breaking ties arbitrarily. Assume that $P_{i,j}$ connects a vertex $v \in C_i$ to a vertex $u \in C_j$, so $P_{i,j} = P_{v,u}$. Recall that $H \subseteq L$, and so the path $P_{i,j}$ is contained in graph L . Since we did not add edge (u, v) to \hat{H} , the length of $P_{i,j}$ is greater than $M + 2$. Since we have assumed that event B does not happen, there is at least one good inner vertex on path $P_{i,j}$. Let X be the set of all good vertices that serve as inner vertices of $P_{i,j}$.

We first show that for each $x \in X$, $x \notin V(\hat{H})$ must hold. Indeed, assume for contradiction that $x \in V(\hat{H})$, so x belongs to some connected component of $V(\hat{H})$. Assume first that $x \in V(C_i)$. Recall that the sub-path of $P_{i,j}$ from x to u is precisely $P_{x,u}$, so this path lies in $\mathcal{P}_{i,j}$. But its length is less than the length of $P_{i,j}$, contradicting the choice of $P_{i,j}$. Otherwise, x belongs to some connected component C_ℓ of \mathcal{C} with $\ell \neq i$. The sub-path of $P_{i,j}$ from v to x is precisely $P_{v,x}$, so this path must lie in $\mathcal{P}_{i,\ell}$. Since its length is less than the length of $P_{i,j}$, this contradicts the choice of the components C_i, C_j . We conclude that $x \notin V(\hat{H})$.

Since $V(\hat{H})$ contains all vertices of $V_{\leq D-1}$, and every vertex in X is a good vertex, it must be the case that $X \subseteq V_D$. Consider again some vertex $x \in X$. Since x is a good vertex and $x \in V_D$, there must be an edge $e_x = (x, x') \in E'_1$, connecting x to some vertex $x' \in V_{\leq D-1}$. In particular,

x' must belong to some connected component of \mathcal{C} , and the edge e_x lies in graph L . Assume that $X = \{x_1, x_2, \dots, x_q\}$, where the vertices are indexed in the order of their appearance on $P_{i,j}$, from v to u . Consider the sequence $\tilde{\sigma} = (v, x'_1, x'_2, \dots, x'_q, u)$ of vertices. All these vertices belong to $V(\hat{H})$, and $v \in C_i$, while $u \in C_j$. For convenience, denote $v = x'_0 = x_0$ and $u = x'_{q+1} = x_{q+1}$. Then there must be an index $1 \leq a \leq q$, such that x'_a and x'_{a+1} belong to distinct connected components of \mathcal{C} . Note that the sub-path of $P_{i,j}$ between x_a and x_{a+1} is precisely $P_{x_a, x_{a+1}}$ – the shortest path connecting x_a to x_{a+1} in H . Since no good vertices lie between x_a and x_{a+1} on this path, and since we have assumed that event B does not happen, the length of this path is at most M . Therefore, there is a path in graph L , connecting x'_a to x'_{a+1} , whose length is at most $M + 2$. This path connects a pair of vertices that belong to different connected components of \hat{H} , contradicting the construction of \hat{H} . \square

Consider now the tree \hat{T} and the graph \hat{H} . Recall that \hat{T} is a rooted tree of depth $D - 1$, $V(\hat{T}) = V(\hat{H})$, $|V(\hat{H})| \leq |V(H)| \leq n$, and, assuming the event B did not happen, \hat{H} is a connected graph. Moreover, set E'_2 of edges is a subset of $E(\hat{T}) = E_2$, obtained by adding every edge of $E(\hat{T})$ to E'_2 with probability p , independently from other edges. Therefore, assuming that event B did not happen, we can use the induction hypothesis on the graph \hat{H} , the tree \hat{T} , and the set E'_2 of edges as R . Let B' be the bad event that the diameter of $\hat{H} \cup E'_2$ is greater than $(\frac{101 \ln n}{p})^{D-1}$. Note that the event B' only depends on the random choices made in selecting the edges of E'_2 . From the induction hypothesis, the probability that B' happens is at most $\frac{D-1}{n^{48}}$.

Lastly, we show that, if neither of the events B, B' happens, then $\text{diam}(H') \leq (\frac{101 \ln n}{p})^D$.

Observation 3.5. *If neither of the events B, B' happens, then $\text{diam}(H') \leq (\frac{101 \ln n}{p})^D$.*

Proof: Consider any pair $x_1, x_2 \in V$ of vertices. It is sufficient to show that, if events B, B' do not happen, then $\text{dist}_{H'}(x_1, x_2) \leq (\frac{101 \ln n}{p})^D$.

Let x'_1 be a good node in $V(H)$ that is closest to x_1 , and define x'_2 similarly for x_2 . From Observation 3.3, $\text{dist}_H(x_1, x'_1) \leq M$. If $x'_1 \in V_{\leq D-1}$, then we define $x''_1 = x'_1$, otherwise we let x''_1 be the node of V_{D-1} that is connected to x'_1 by an edge of E'_1 , and we define x''_2 similarly for x_2 . Therefore, $x''_1, x''_2 \in V_{\leq D-1} = V(\hat{H})$, and, assuming event B does not happen, $\text{dist}_{H'}(x_1, x''_1) \leq M + 1$, and $\text{dist}_{H'}(x_2, x''_2) \leq M + 1$. Since we have assumed that the bad event B' does not happen, $\text{dist}_{\hat{H} \cup E'_2}(x''_1, x''_2) \leq (\frac{101 \ln n}{p})^{D-1}$. Recall that for every edge $e = (u, v) \in \hat{H} \cup E'_2$, if $e \in E'_2$ then $e \in E(H')$; otherwise, $e \in E(\hat{H})$, and there is a path in graph $H \cup E'_1$ of length at most $M + 2$ connecting u to v in H . Therefore, $\text{dist}_{H'}(x''_1, x''_2) \leq (M + 2) \cdot \text{dist}_{\hat{H}}(x''_1, x''_2) \leq (\frac{101 \ln n}{p})^{D-1} \cdot (M + 2)$.

Altogether, since $M = (50 \ln n)/p$,

$$\begin{aligned} \text{dist}_{H'}(x_1, x_2) &\leq \text{dist}_{H'}(x_1, x''_1) + \text{dist}_{H'}(x''_1, x''_2) + \text{dist}_{H'}(x''_2, x_2) \\ &\leq \left(\frac{101 \ln n}{p} \right)^{D-1} \cdot (M + 2) + (2M + 2) \\ &\leq \left(\frac{101 \ln n}{p} \right)^D. \end{aligned}$$

\square

The probability that either B or B' happen is bounded by $\frac{D}{n^{48}}$. Therefore, with probability at least $1 - \frac{D}{n^{48}}$, neither of the events happens, and $\text{diam}(H') \leq (\frac{101 \ln n}{p})^D$. This concludes the proof of Theorem 3.2. \square

4 Low-Diameter Packing of Edge-Disjoint Trees: Proof of Theorem 1.2

In this section we provide the proof of Theorem 1.2. The main tool in the proof of Theorem 1.2 is the following theorem.

Theorem 4.1. *Let k, D, n be any positive integers with $k > 1000 \ln n$, let $\frac{707 \ln n}{k} \leq p \leq 1$ be a real number, and let G be an n -vertex k -edge-connected graph of diameter D . Let G' be a sub-graph of G with $V(G') = V(G)$, where every edge $e \in E(G)$ is added to G' with probability p independently from other edges. Then, with probability at least $1 - 1/\text{poly}(n)$, G' is a connected graph, and its diameter is bounded by $k^{D(D+1)/2}$.*

Karger [Kar99] has shown that, if G is a k -connected graph, and G' is obtained by sub-sampling the edges of G with probability $\Omega(\log n/k)$, then G' is a connected graph with high probability. Theorem 4.1 further shows that the diameter of G' is with high probability bounded by $k^{D(D+1)/2}$, where D is the diameter of G .

Theorem 1.2 easily follows from Theorem 4.1: Let $r = \lfloor k/(707 \ln n) \rfloor$. We partition $E(G)$ into subsets E_1, \dots, E_r by choosing, for each edge $e \in E(G)$, an index i independently and uniformly at random from $\{1, 2, \dots, r\}$ and then adding e to E_i . For each $1 \leq i \leq r$, we define a graph G_i by setting $V(G_i) = V(G)$ and $E(G_i) = E_i$. Finally, for each graph G_i , we compute an arbitrary BFS tree T_i , and return the resulting collection $\mathcal{T} = \{T_1, \dots, T_r\}$ of trees. It is immediate to verify that the graphs G_1, \dots, G_r are edge-disjoint, and so are the trees of \mathcal{T} . Moreover, applying Theorem 4.1 to each graph G_i with $p = 1/r$, we get that with probability $1 - 1/\text{poly}(n)$, $\text{diam}(T_i) \leq 2 \text{diam}(G_i) \leq O(k^{D(D+1)/2})$. Using the union bound over all $1 \leq i \leq r$ completes the proof of Theorem 1.2. It now remains to prove Theorem 4.1.

4.1 Bounding the Diameter of a Random Subgraph: Proof of Theorem 4.1

This subsection is dedicated to proving Theorem 4.1. We assume that we are given an n -vertex k -edge connected graph $G = (V, E)$, with $k > 1000 \ln n$, and a parameter $\frac{707 \ln n}{k} \leq p \leq 1$. Our goal is to show that a random graph G' , obtained by independently sub-sampling every edge of G with probability p , has diameter at most $k^{D(D+1)/2}$ with probability at least $1 - 1/\text{poly}(n)$.

Let B be the bad event that the graph G' is not connected. We start by establishing that B only happens with low probability, using a well known result of Karger [Kar99].

Claim 4.2. *The probability that the event B happens is at most $O(1/n^{10})$.*

Proof: We use the following result of Karger [Kar99].

Theorem 4.3 (Adaptation of Theorem 2.1 from [Kar99]). *Let k, n be any positive integers, and let d, p be any positive real numbers such that $0 < p < 1$. Let G be an n -vertex k -edge connected graph. Let $G' \sim \mathcal{D}(G, p)$ be a random subgraph of G and let $\epsilon = \sqrt{\frac{3(d+2)\ln n}{kp}}$. If $\epsilon < 1$ then, with probability $1 - O(1/n^d)$, every cut in G' has value between $(1 + \epsilon)$ and $(1 - \epsilon)$ times its expected value.*

We apply Theorem 4.3 to the graph G , with the parameter p and $d = 10$. Since G is k -edge connected and $p \geq (707 \ln n)/k$, we get that:

$$\epsilon = \sqrt{\frac{3(d+2)\ln n}{kp}} \leq \sqrt{\frac{36 \ln n}{k \cdot (707 \ln n)/k}} \leq \sqrt{\frac{36}{707}} < 0.3 < 1.$$

Therefore, with probability $1 - O(1/n^{10})$, for every cut $(S, V \setminus S)$ in G' , $|E_{G'}(S, V \setminus S)| \geq (1 - \epsilon) \cdot p \cdot |E_G(S, V \setminus S)| \geq 0.7 \cdot pk > 0$. Therefore, with probability $1 - O(1/n^{10})$, graph G' is connected, and event B happens with probability $O(1/n^{10})$. \square

We now proceed to bound the diameter of G' . Denote $G = (V, E)$, and let T be a BFS tree of G , rooted at an arbitrary node of G . Since G has diameter at most D , the depth of T is at most D . For each integer $0 \leq i \leq D$, we denote by V_i the set of nodes that lie at the i th level of T (recall that the root lies at level 0), and we denote $V_{\leq i} = \bigcup_{j=0}^i V_j$. For each $0 \leq i \leq D-1$, let E_i be the set of edges of T connecting vertices of V_i to vertices of V_{i+1} . We also let $E_{\text{out}} = E \setminus E(T)$, so $E = E_{\text{out}} \cup \left(\bigcup_{i=0}^{D-1} E_i\right)$.

Recall that $G' \sim \mathcal{D}(G, p)$. We first define a different (but equivalent) sampling algorithm for generating a random graph G' from the distribution $\mathcal{D}(G, p)$. We will then use this algorithm to bound the diameter of G' . The algorithm consists of $D+1$ phases. For each $0 \leq i \leq D$, we compute a random subgraph G'_i of G , with $V(G'_i) = V(G)$, such that $G'_0 \subseteq G'_1 \subseteq \dots \subseteq G'_D$. The final graph G'_D is denoted by G' . For all $0 \leq i \leq D$, we denote by \mathcal{C}_i the set of all connected components of the graph G'_i . Throughout the algorithm, we maintain a set \hat{E} of edges, that is initialized to \emptyset .

In order to execute the 0th phase, we consider the edges of E_{out} . Each such edge is added to the set \hat{E} with probability p independently from other edges. Let $E'_{\text{out}} \subseteq E_{\text{out}}$ be the set of edges that are added to \hat{E} in this phase. We then set $G'_0 = (V, E'_{\text{out}})$. Observe that G'_0 may not be a connected graph. We denote by \mathcal{C}_0 the set of all connected components of G'_0 . We refer to the connected components of \mathcal{C}_0 as *phase-0 clusters*.

For each $1 \leq i \leq D$, in order to execute the i th phase, we consider the set E_{D-i} of edges. Each such edge is added to \hat{E} with probability p independently from other edges. We denote by $E'_{D-i} \subseteq E_{D-i}$ the set of edges that are added to \hat{E} at phase i . Graph G'_i is obtained from the graph G'_{i-1} by adding all edges of E'_{D-i} to it. As before, we denote by \mathcal{C}_i the set of all connected components of G'_i , and we call them *phase- i clusters*.

Let E' be the set \hat{E} at the end of this algorithm. We denote by $G' = (V, E')$ the final graph that we obtain. Clearly, $G' = G'_D$, and it is generated from the distribution $\mathcal{D}(G, p)$, since $E = E_{\text{out}} \cup \left(\bigcup_{i=0}^{D-1} E_i\right)$, and the edge sets $E_{\text{out}}, E_0, \dots, E_{D-1}$ are mutually disjoint. We denote by T' the subgraph of T with $V(T') = V(T)$ and $E(T') = \bigcup_{i=0}^{D-1} E'_i$. Observe that $T' \sim \mathcal{D}(T, p)$.

Consider a pair $u, u' \in V$ of distinct vertices. We say that u and u' are *joined at phase 0*, if they belong to the same connected component of G'_0 . We say that they are *joined at phase i* for $1 \leq i \leq D$, if u and u' belong to the same connected component of G'_i but they lie in different connected components of G'_{i-1} . For all $0 \leq i \leq D$, let Π_i denote the set of all pairs of vertices that joined at phase i . Note that, if the event B does not happen, then every pair (u, u') of distinct vertices of V lies in a unique set Π_i , for some $0 \leq i \leq D$.

In order to bound the distances between pairs of nodes in G' , we need the following theorem, that slightly generalizes Theorem 3.2. The proof is similar to that of Theorem 3.2 and is deferred to Section 4.2.

Theorem 4.4. *Let T be a rooted tree of depth D with $|V(T)| \leq n$, and let H be a connected graph with $V(H) \subseteq V(T)$. For a real number $0 < p < 1$, let $R \sim \mathcal{D}(T, p)$ be a random subgraph of T , so $V(R) = V(T)$, and every edge of $E(T)$ is added to $E(R)$ independently with probability p . Then with probability at least $1 - \frac{D}{n^{48}}$, for every pair u, v of vertices of H , $\text{dist}_{R \cup H}(u, v) \leq (\frac{101 \ln n}{p})^D$.*

We use a parameter $N = (101 \ln n)/p$. Since $p \geq (707 \ln n)/k$, we get that $7N \leq k$. For each $0 \leq i \leq D$, we define a distance threshold M_i , as follows. We let $M_0 = N^D$, and for all $1 \leq i \leq D$, we let $M_i = 7N^{D-i} \cdot M_{i-1}$. It is easy to verify that, for all $0 \leq i \leq D$:

$$M_i \leq 7^i N^{D+(D-1)+\dots+D-i} \leq (7N)^{D(D+1)/2} \leq k^{D(D+1)/2}.$$

For each $0 \leq i \leq D$, we say that a bad event B_i happens, if for some pair $(u, u') \in \Pi_0 \cup \dots \cup \Pi_i$ of distinct vertices, the distance between u and u' in G' is greater than M_i . The following lemma is central to the proof of Theorem 4.1.

Lemma 4.5. *For each $0 \leq i \leq D$, the probability of event B_i is at most i/n^{43} .*

Observe that, if none of the events B, B_0, \dots, B_D happen, then G' is a connected graph, and in particular, every pair (u, u') of distinct vertices of G belongs to some set Π_i , for some $0 \leq i \leq D$, so $\text{dist}_{G'}(u, u') \leq k^{D(D+1)/2}$. Using the union bound, the probability that at least one of the events B, B_0, \dots, B_D happens is bounded by $O(1/n^{10})$. Therefore, with probability at least $1 - O(1/n^{10})$, graph G' is connected, and $\text{diam}(G') \leq k^{D(D+1)/2}$. In order to complete the proof of Theorem 4.1, it is now enough to prove Lemma 4.5.

Proof of Lemma 4.5: The proof is by induction on i . The base case is when $i = 0$. Let $(u, u') \in \Pi_0$ be any pair of vertices of G' that are joined at phase 0. Let $B_0(u, u')$ be the bad event that the distance from u to u' in G' is greater than $M_0 = N^D$. Clearly, event B_0 may only happen if event $B_0(u, u')$ happens for some pair $(u, u') \in \Pi_0$ of vertices. We now bound the probability of each such event separately.

Let $(u, u') \in \Pi_0$ be any pair of vertices joined at phase 0. Recall that u, u' lie in the same connected component of G'_0 , and so there is some path Q connecting u to u' in G'_0 . Consider now the graph Q , and the tree T that we have defined before, whose depth is bounded by D . Recall that $T' \subseteq T$ is obtained from T by sub-sampling each of its edges independently with probability p . Using Theorem 4.4 with graph $H = Q$, the tree T , and the sampling probability p , we conclude that the probability that the distance from u to u' in $Q \cup T'$ is greater than $\left(\frac{101 \ln n}{p}\right)^D = N^D$ is bounded by D/n^{46} . Recall that $Q \subseteq G'_0$ and so $Q \cup T' \subseteq G'$. Therefore, $\text{dist}_{G'}(u, u') \leq \text{dist}_{Q \cup T'}(u, u')$, and

so the probability that event $B_0(u, u')$ happens is bounded by D/n^{46} . Using the union bound over all pairs $(u, u') \in \Pi_0$ and the fact that $D \leq n$, we conclude that $\Pr[B_0] \leq 1/n^{43}$.

We now assume that the claim is true for all indices $0, \dots, (i-1)$, and prove it for index i . As before, let $(u, u') \in \Pi_i$ be any pair of vertices of G' that are joined at phase i . Let $B_i(u, u')$ be the bad event that the distance from u to u' in G' is greater than M_i . Clearly, event B_i may only happen if event $B_i(u, u')$ happens for some pair $(u, u') \in \Pi_i$ of vertices, or one of the events B_0, \dots, B_{i-1} happens. We now bound the probability of each such event $B_i(u, u')$ separately.

Recall that G'_i is the graph that we have obtained at the end of phase i of the sampling algorithm. Note that G'_i is determined completely by the random choices made in phases $0, 1, \dots, i$. Let $(u, u') \in \Pi_i$ be a pair of vertices that are joined at phase i . By the definition, u and u' belong to different phase- $(i-1)$ clusters but the same phase- i cluster. Therefore, there is some simple path Q in graph G'_i that connects u to u' . Recall that graph G'_i is obtained from the graph G'_{i-1} by adding the edges of E'_{D-i} to it – the edges that we have sampled in phase i . The edges of E'_{D-i} are sampled from the set E_{D-i} of edges, connecting vertices of V_{D-i} to vertices of V_{D-i+1} . For convenience, we denote the edges of E'_{D-i} by \tilde{E} . Let Q_1, Q_2, \dots, Q_t be the set of segments of Q , obtained by deleting all edges of \tilde{E} from Q . Note that each such segment Q_j is contained in some phase- $(i-1)$ cluster, and $t \geq 2$, since u and u' lie in different phase- $(i-1)$ clusters. We assume that the segments are indexed by their natural order on path Q , and that $u \in Q_1$, while $u' \in Q_t$. For each $1 \leq j < t$, we let L_j be the sub-path of Q , connecting the last vertex of Q_j to the first vertex of Q_{j+1} . Notice that all edges in L_j belong to the set \tilde{E} , and so each such segment L_j is either a single edge of \tilde{E} , or it consists of two such edges, that share a common vertex in V_{D-i} (see Figure 1). In either case, each such segment L_j must contain a single vertex that belongs to V_{D-i} , which we denote by w_j .

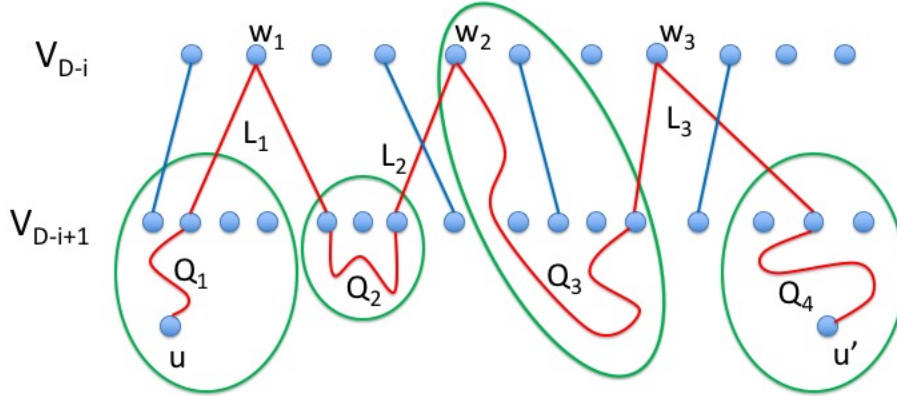


Figure 1: Vertices u and u' are joined at level i ; the path Q is shown in red; the edges of $\tilde{E} \setminus E(Q)$ are shown in blue; the phase- $(i-1)$ clusters that share vertices with Q are shown in green.

We denote $W = \{w_1, \dots, w_{t-1}\}$, so $W \subseteq V_{D-i}$, and we define a new graph H , whose vertex set is W , and, for each $1 \leq j \leq t-2$, there is an edge between vertex w_j and vertex w_{j+1} . Observe that

H is a path, connecting the vertices of W in their natural order. Note that H is guaranteed to be a connected graph, and that it only depends on the random choices made in phases $0, \dots, i$.

Let \hat{T} be the sub-tree of T that is induced by the vertices of $V_{\leq D-i}$, and let \hat{T}' be the sub-tree of \hat{T} with $V(\hat{T}') = V(\hat{T})$, and $E(\hat{T}')$ containing all edges of $E'_{D-i-1} \cup \dots \cup E'_0$. In other words, the edges of \hat{T}' are all edges that were sampled in phases $(i+1), \dots, D$ of the sampling algorithm. Observe that $\hat{T}' \sim \mathcal{D}(\hat{T}, p)$. Finally, let $H' = H \cup \hat{T}'$. We let $B'_i(u, u')$ be the bad event that the distance from w_1 to w_{t-1} in the graph H' is greater than N^{D-i} . Observe that the event $B'_i(u, u')$ only depends on random choices made in phases $(i+1), \dots, D$. Using Theorem 4.4 with the graph H , the tree \hat{T} , and the sampling probability p , together with the fact that $N = (101 \ln n)/p$, we conclude that, the probability that the event $B'_i(u, u')$ happens is bounded by D/n^{46} . Lastly, we need the following claim.

Claim 4.6. *If neither of the events $B_{i-1}, B'_i(u, u')$ happens, then neither does event $B_i(u, u')$.*

Proof: Assume that neither of the events $B_{i-1}, B'_i(u, u')$ happens. We show that the distance between u and u' in G' is bounded by M_i , that is, event $B_i(u, u')$ does not happen.

Let P be the shortest path connecting w_1 to w_{t-1} in graph H' . Since we have assumed that event $B'_i(u, u')$ does not happen, $|P| \leq N^{D-i}$. We would like to turn the path P into a path P' connecting u to u' in graph G' , without increasing its length by too much. Observe first that an edge $e = (v, v') \in E(P)$ must be of one of two types: either it is an edge of \hat{T}' , and hence it is also an edge of G' ; or it is an edge of the form (w_j, w_{j+1}) , in which case it may not be an edge of G' . In order to complete the proof, we show that each such edge can be replaced by a short path in G' , and we show that u and u' can be connected by short paths to w_1 and w_{t-1} , respectively, in graph G' .

Observation 4.7. *Assume that event B_{i-1} does not happen. Then for each $1 \leq j < t-1$, there is a path P_j of length at most $2 + M_{i-1}$ in graph G' , connecting vertex w_j to vertex w_{j+1} . Moreover, there is a path P_0 of length at most $1 + M_{i-1}$ in graph G' connecting u to w_1 , and there is a path P_{t-1} of length at most $1 + M_{i-1}$ in graph G' connecting w_{t-1} to u' .*

Proof: From the way we have partitioned the path Q into segments, either u and w_1 lie in the same phase- $(i-1)$ cluster, or there is an edge $(v, w_1) \in \tilde{E}$, such that v lies in the same phase- $(i-1)$ cluster as u . In the former case, we also denote w_1 by v for convenience. Therefore, u and v were joined before phase i , and so $\text{dist}_{G'}(u, v) \leq M_{i-1}$, by our assumption that event B_{i-1} does not happen. Therefore, there is a path in G' of length at most $M_{i-1} + 1$ that connects u to w_1 . Similarly, there is a path of length at most $M_{i-1} + 1$ in graph G' connecting w_{t-1} to u' .

Consider now some index $1 \leq j < t-1$. From the definition of segments of Q , there is some phase- $(i-1)$ cluster C , and vertices $v, v' \in C$, such that: (i) either $w_j = v$, or edge $(w_j, v) \in \tilde{E}$; and (ii) either $w_{j+1} = v'$, or edge $(w_{j+1}, v') \in \tilde{E}$. In either case, $v, v' \in \Pi_{i'}$ for some $i' < i$, and, since we have assumed that event B_{i-1} does not happen, $\text{dist}_{G'}(v, v') \leq M_{i-1}$. Since $\tilde{E} \subseteq E(G')$, $\text{dist}_{G'}(w_j, w_{j+1}) \leq 2 + \text{dist}_{G'}(v, v') \leq 2 + M_{i-1}$. \square

In order to obtain the desired path P' , we replace each edge of the form (w_j, w_{j+1}) on path P with the corresponding path P_j , and we append P_1 and P_{t-1} to the beginning and to the end of the resulting path. It is easy to verify that $|P'| \leq |P| \cdot (M_{i-1} + 2) + 2M_{i-1} + 2 \leq |P| \cdot 7M_{i-1} \leq 7N^{D-i}M_{i-1} = M_i$. \square

So far we have shown that, if the events B_{i-1} , $B'_i(u, u')$ do not happen, then neither does event $B_i(u, u')$. Recall that event B_i may only happen if some event in $\{B_{i-1}\} \cup \{B_i(u, u') \mid (u, u') \in \Pi_i\}$ happens. Therefore, event B_i may only happen if some event in $\{B_{i-1}\} \cup \{B'_i(u, u') \mid (u, u') \in \Pi_i\}$ happens.

From the induction hypothesis, the probability of event B_{i-1} happening is bounded by $(i-1)/n^{43}$, and, from the previous discussion, for each $(u, u') \in \Pi_i$, the probability of the event $B'_i(u, u')$ is bounded by D/n^{46} . Taking the union bound over all these events, and using the facts that $|\Pi_i| \leq n^2$ and $D \leq n$, we conclude that the probability that any event in $\{B_{i-1}\} \cup \{B'_i(u, u') \mid (u, u') \in \Pi_i\}$ happens is bounded by i/n^{43} , and this also bounds the probability of the event B_i . \square

4.2 Proof of Theorem 4.4

Recall that we are given a connected graph H and a rooted tree T of depth D with $|V(T)| \leq n$ and $V(H) \subseteq V(T)$, together with a parameter p . We let R be a random subgraph of T with $V(R) = V(T)$, where every edge of $E(T)$ is added to $E(R)$ with probability p independently from other edges; in other words, $R \sim \mathcal{D}(T, p)$. Our goal is to show with probability at least $1 - \frac{D}{n^{48}}$, for every pair u, v of vertices of H , $\text{dist}_{R \cup H}(u, v) \leq (\frac{101 \ln n}{p})^D$. The proof is a slight modification of the proof of Theorem 3.2. Note that the main difference between Theorem 4.4 and Theorem 3.2 is that now the tree T may contain vertices in addition to $V(H)$.

We denote $V = V(T)$. As before, for each $0 \leq i \leq D$, we let V_i be the set of nodes lying at level i of the tree T , and denote $V_{\leq i} = \bigcup_{t=0}^i V_t$. We also denote $H' = H \cup R$.

We say that a node $x \in V(H)$ is *good* if either (i) $x \in V_{\leq D-1} \cap V(H)$; or (ii) $x \in V_D \cap V(H)$, and there is an edge in R connecting x to a node in V_{D-1} . Let $M = \frac{50 \ln n}{p}$. As before, we assume that $V(H) = \{v_1, \dots, v_n\}$, where the vertices are indexed in an arbitrary order. Given an ordered pair (x, x') of vertices in H , and a path P of H connecting x to x' , let $\sigma(P)$ be a sequence of vertices that lists all the vertices appearing on P in their natural order, starting from vertex x . For an ordered pair $(x, x') \in V(H)$ of vertices, let $P_{x, x'}$ be shortest path connecting x to x' in H , and among all such paths P , choose the one whose sequence $\sigma(P)$ is smallest lexicographically. Observe that $P_{x, x'}$ is unique, and, moreover, if some pair $u, u' \in V(H)$ of vertices lie on $P_{x, x'}$, with u lying closer to x than u' on $P_{x, x'}$, then the sub-path of $P_{x, x'}$ from u to u' is precisely $P_{u, u'}$.

For a pair $x, x' \in V(H)$ of vertices of H , we let $B(x, x')$ be the bad event that length of $P_{x, x'}$ is greater than M and there is no good internal node on $P_{x, x'}$. Exactly as before, the probability that event $B(x, x')$ happens for a fixed pair x, x' of vertices is at most $(1-p)^M = (1-p)^{(50 \ln n)/p} < n^{-50}$.

Let B be the bad event that $B(x, x')$ happens for some pair $x, x' \in V(H)$ of nodes. From the union bound over all pairs of distinct nodes in $V(H)$, the probability of B is bounded by n^{-48} . The following observation is an analogue of Observation 3.3, and its proof is identical.

Observation 4.8. *If the event B does not happen, then for every node $x \in V(H)$, there is a good node $x' \in V$ such that $\text{dist}_H(x, x') \leq M$.*

As before, we prove Theorem 4.4 by induction on D . The base of the induction is when $D = 1$. In this case, T is a star graph. Let c denote the vertex that serves as the center of the star. For any pair $x_1, x_2 \in V(H)$ of vertices, we denote by x'_1 the good node that is closest to x_1 in H , and we

define x'_2 similarly for x_2 . Notice that, from the definition of good vertices, either $x'_1 = c$, or it is connected to c by an edge of R , and the same holds for x'_2 . Therefore, $\text{dist}_{H'}(x'_1, x'_2) \leq 2$ must hold. If the event B does not happen, then, since H is a subgraph of H' , $\text{dist}_{H'}(x_1, x_2) \leq \text{dist}_{H'}(x_1, x'_1) + \text{dist}_{H'}(x'_1, x'_2) + \text{dist}_{H'}(x'_2, x_2) \leq \text{dist}_H(x_1, x'_1) + \text{dist}_{H'}(x'_1, x'_2) + \text{dist}_H(x_2, x'_2) \leq 2M + 2 \leq \frac{101 \ln n}{p}$. Therefore, with probability at least $1 - n^{-48}$, $\text{dist}_{H'}(x_1, x_2) \leq \frac{101 \ln n}{p}$.

Assume now that Theorem 4.4 holds for every connected graph H and every tree T of depth at most $D - 1$, with $V(H) \subseteq V(T)$. Consider now some connected graph H , and a rooted tree T of depth D , with $V(H) \subseteq V(T)$ and $|V(T)| \leq n$. We can assume without loss of generality that every vertex of V_D lies in $V(H)$, since all other vertices of V_D can be discarded from T . We partition the edges of $E(T)$ into two subsets: set E_1 contains all edges incident to the vertices of V_D , and set E_2 contains all remaining edges. Let $R_1 \subseteq R$ be the subgraph of R containing only the edges of $E_1 \cap E(R)$ and their endpoints, and let $R_2 \subseteq R$ be obtained from R by discarding all vertices of V_D and their incident edges. Notice that the definition of good vertices only depends on the edges of R_1 , and so the event B only depends on the random choices made in selecting the edges of R_1 , and is independent of the random choices made in selecting the edges of R_2 .

Let L be a subgraph of H' , obtained by starting with $L = H$, and then adding every edge of R_1 together with their endpoints to the graph. Equivalently, $L = H \cup R_1$.

Finally, we define a new graph \hat{H} , whose vertex set consists of two subsets: set $U_1 = V_{\leq D-1} \cap V(H)$, and set U_2 , containing all vertices $v \in V_{D-1}$, such that v is connected with an edge of R_1 to some vertex of $V_D \cap V(H) = V_D$. We set $V(\hat{H}) = U_1 \cup U_2$. Observe that $V(\hat{H}) \subseteq V(L)$. In order to define the edge set $E(\hat{H})$, we add an edge between a pair of nodes w, w' in \hat{H} iff the distance between w and w' in L is at most $M + 4$. We also let \hat{T} be the tree obtained from T , by discarding all vertices of V_D from it. Observe that $V(\hat{H}) \subseteq V(\hat{T}) = V_{\leq D-1}$. As before, the idea is to use the induction hypothesis on the graph \hat{H} , together with the tree \hat{T} . In order to do so, we need to prove that \hat{H} is a connected graph, which we do next.

Observation 4.9. *If the event B does not happen, then graph \hat{H} is connected.*

Proof: Assume that the event B does not happen, and assume for contradiction that graph \hat{H} is not connected. Let $\mathcal{C} = \{C_1, \dots, C_r\}$ be the set of all connected components of graph \hat{H} .

For every vertex $v \in V(\hat{H})$, we define a set $\Gamma(v) \subseteq V(H)$ of vertices, as follows. If $v \in V(H)$, then $\Gamma(v)$ contains a single vertex – the vertex v . Otherwise, $v \in V_{D-1} \setminus V(H)$ must hold, and it must be connected by at least one edge of R_1 to some vertex in $V_D \cap V(H) = V_D$. We then let $\Gamma(v)$ contain every vertex of V_D that is connected to v by an edge of R_1 .

For an ordered pair (u, v) of vertices of $V(\hat{H})$, we define a set $\mathcal{P}(u, v)$ of paths as follows: $\mathcal{P}(u, v) = \{P_{x,y} \mid x \in \Gamma(u), y \in \Gamma(v)\}$ (recall that $P_{x,y}$ is the shortest path that starts at x and ends at y in H , with the lexicographically smallest sequence $\sigma(P_{x,y})$.) Observe that every path $P_{x,y} \in \mathcal{P}(u, v)$ can be augmented to a path connecting u to v in graph L , by appending the edge (u, x) to the beginning of the path (if $u \neq x$), and appending the edge (y, v) to the end of the path (if $y \neq v$).

For every ordered pair (C_i, C_j) of distinct components of \mathcal{C} , consider the set $\mathcal{P}_{i,j} = \bigcup_{u \in C_i, v \in C_j} \mathcal{P}(u, v)$ of paths. We let $P_{i,j}$ be a shortest path in $\mathcal{P}_{i,j}$. We choose two distinct components $C_i, C_j \in \mathcal{C}$ with $P_{i,j}$ having the shortest length, breaking ties arbitrarily. Assume that $P_{i,j} \in \mathcal{P}(u, v)$, for $u \in C_i$ and $v \in C_j$. Let $x \in \Gamma(u)$ and $y \in \Gamma(v)$ be the endpoints of $P_{i,j}$, so $P_{i,j} = P_{x,y}$. Let P' be the

augmented path obtained from $P_{x,y}$, by appending the edge (u, x) to the beginning of the path (if $u \neq x$), and appending the edge (y, v) to the end of the path (if $y \neq v$), so P' now connects u to v . Recall that $L = H \cup R_1$, and so the path P' is contained in graph L . Since we did not add edge (u, v) to \hat{H} , the length of P' is greater than $M + 4$. Therefore, the length of the path $P_{x,y}$ in graph H is at least $M + 2$. Since we have assumed that event B does not happen, there is at least one good inner vertex on path $P_{x,y}$. Let X be the set of all good vertices that serve as inner vertices of $P_{x,y}$.

We first show that for each $z \in X$, $z \notin V(\hat{H})$ must hold. Indeed, assume otherwise, that is, $z \in V(\hat{H})$ for some $z \in X$. Then z must belong to some connected component $C_\ell \in \mathcal{C}$. Since z is a good vertex, $z \in V(H)$, and so $\Gamma(z) = \{z\}$. Therefore, the sub-path of $P_{x,y}$ from x to z lies in $\mathcal{P}(u, z)$, and the sub-path of $P_{x,y}$ from z to y lies in $\mathcal{P}(z, v)$. We denote the former path by P_1 and the latter path by P_2 . The length of each of these paths is less than the length of $P_{x,y}$.

Assume first that $\ell = i$, that is, $z \in V(C_i)$. Then $P_2 \in \mathcal{P}_{i,j}$, and its length is less than the length of $P_{x,y}$, a contradiction. Otherwise, $\ell \neq i$. But then $P_1 \in \mathcal{P}_{i,\ell}$, and its length is less than the length of $P_{i,j}$, a contradiction. We conclude that for each $z \in X$, $z \notin V(\hat{H})$.

Since $V(\hat{H})$ contains all vertices of $V_{\leq D-1} \cap V(H)$, and every vertex in X is a good vertex, it must be the case that $X \subseteq V_D$. Consider again some vertex $z \in X$. Since z is a good vertex and $z \in V_D$, there must be an edge $e_z = (z, z') \in E(R_1)$, connecting z to some vertex $z' \in V_{\leq D-1}$. From the definition of graph \hat{H} , $z' \in V(\hat{H})$, and in particular, z' must belong to some connected component of \mathcal{C} , while the edge e_z lies in graph L . Assume that $X = \{z_1, z_2, \dots, z_q\}$, where the vertices are indexed in the order of their appearance on $P_{i,j}$, from x to y . Consider the sequence $\sigma' = (u, z'_1, z'_2, \dots, z'_q, v)$ of vertices. All these vertices belong to $V(\hat{H})$, and $u \in C_i$, while $v \in C_j$. For convenience, denote $x = z'_0$ and $y = z'_{q+1}$. Then there must be an index $1 \leq a \leq q$, such that z'_a and z'_{a+1} belong to distinct connected components of \mathcal{C} . Note that the sub-path of $P_{i,j}$ between z_a and z_{a+1} is precisely $P_{z_a, z_{a+1}}$ – the shortest path connecting z_a to z_{a+1} in H . Since no good vertices lie between z_a and z_{a+1} on this path, and since we have assumed that event B does not happen, the length of this path is at most M . Therefore, there is a path in graph L , connecting z'_a to z'_{a+1} , whose length is at most $M + 2$. This path connects a pair of vertices that belong to different connected components of \hat{H} , contradicting the definition of \hat{H} . \square

Consider now the tree \hat{T} and the graph \hat{H} . Recall that \hat{T} is a rooted tree of depth $D - 1$, $V(\hat{T}) = V(\hat{H})$, and, assuming the event B did not happen, \hat{H} is a connected graph. Moreover, $R_2 \sim \mathcal{D}(\hat{T}, p)$. Therefore, assuming that event B did not happen, we can use the induction hypothesis on the graph \hat{H} , the tree \hat{T} , and the random sub-graph R_2 of \hat{T} . Let B' be the bad event that for some pair $x_1, x_2 \in V(\hat{H})$ of vertices, $\text{dist}_{\hat{H} \cup R_2}(x_1, x_2) > (\frac{101 \ln n}{p})^{D-1}$. From the induction hypothesis, the probability that B' happens is at most $\frac{D-1}{n^{48}}$.

Lastly, we show that, if neither of the events B, B' happen, then for every pair $x_1, x_2 \in V(H)$ of vertices, $\text{dist}_{H'}(x_1, x_2) \leq (\frac{101 \ln n}{p})^D$.

Observation 4.10. *If neither of the events B, B' happen, then for every pair $x_1, x_2 \in V(H)$ of vertices of H , $\text{dist}_{H'}(x_1, x_2) \leq (\frac{101 \ln n}{p})^D$.*

Proof: Consider any pair $x_1, x_2 \in V(H)$ of vertices. Let x'_1 be a good node in $V(H)$ that is closest to x_1 in H , and define x'_2 similarly for x_2 . From Observation 4.8, $\text{dist}_H(x_1, x'_1) \leq M$. If

$x'_1 \in V_{\leq D-1}$, then we define $x''_1 = x'_1$, otherwise we let x''_1 be the node of V_{D-1} that is connected to x'_1 by an edge of E'_1 , and we define x''_2 similarly for x_2 . Therefore, $x''_1, x''_2 \in V(\hat{H})$, and, assuming event B does not happen, $\text{dist}_{H'}(x_1, x''_1) \leq M + 1$, and $\text{dist}_{H'}(x_2, x''_2) \leq M + 1$. Since we have assumed that the bad event B' does not happen, $\text{dist}_{\hat{H} \cup R_2}(x''_1, x''_2) \leq (\frac{101 \ln n}{p})^{D-1}$. Recall that for every edge $e = (u, v) \in \hat{H} \cup R_2$, if $e \in E(R_2)$, then $e \in E(H')$; otherwise, $e \in E(\hat{H})$, and there is a path in graph $H \cup R_1$ of length at most $M + 4$ connecting u to v in H . Therefore, $\text{dist}_H(x''_1, x''_2) \leq (M + 4) \cdot \text{dist}_{\hat{H}}(x''_1, x''_2) \leq (\frac{101 \ln n}{p})^{D-1} \cdot (M + 4)$.

Altogether, $\text{dist}_{H'}(x_1, x_2) \leq \text{dist}_{H'}(x_1, x''_1) + \text{dist}_{H'}(x''_1, x''_2) + \text{dist}_{H'}(x''_2, x_2) \leq (\frac{101 \ln n}{p})^{D-1} \cdot (M + 4) + (2M + 2) \leq (\frac{101 \ln n}{p})^D$, since $M = (50 \ln n)/p$. \square

The probability that either B or B' happen is bounded by $\frac{D}{n^{48}}$. Therefore, with probability at least $1 - \frac{D}{n^{48}}$, neither of the events happens, for every pair $x_1, x_2 \in V(H)$ of vertices of H , $\text{dist}_{H'}(x_1, x_2) \leq (\frac{101 \ln n}{p})^D$.

5 Lower Bound: Proof of Theorem 1.3

In this section we provide the proof of Theorem 1.3. We start by proving the following slightly weaker theorem; we then extend it to obtain the proof of Theorem 1.3.

Theorem 5.1. *For all positive integers k, D, η, α such that $k/(4D\alpha\eta)$ is an integer, there exists a k -edge connected graph G with $|V(G)| = O\left(\left(\frac{k}{2D\alpha\eta}\right)^D\right)$ and diameter at most $2D$, such that, for any collection $\mathcal{T} = \{T_1, \dots, T_{k/\alpha}\}$ of k/α spanning trees of G that causes edge-congestion at most η , some tree $T_i \in \mathcal{T}$ has diameter at least $\frac{1}{4} \cdot \left(\frac{k}{2D\alpha\eta}\right)^D$.*

Notice that the main difference from Theorem 1.3 is that the graph G is no longer required to be simple; the number of vertices of $V(G)$ is no longer fixed to be a prescribed value; and the diameter of G is $2D$ instead of $2D + 2$.

Proof: For a pair of integers $w > 1, D \geq 1$, we let $T_{w,D}$ be a tree of depth D , such that every vertex lying at levels $0, \dots, D - 1$ of $T_{w,D}$ has exactly w children. In other words, $T_{w,D}$ is the full w -ary tree of depth D . We denote $N_{w,D} = |V(T_{w,D})| = 1 + w + w^2 + \dots + w^D \leq w^{D+1}/(w - 1)$. We assume that for every inner vertex $v \in V(T_{w,D})$, we have fixed an arbitrary ordering of the children of v , denoted by $a_1(v), \dots, a_w(v)$.

A *traversal* of a tree T is an ordering of the vertices of T . A *post-order traversal* on a tree T , $\pi(T)$, is defined as follows. If the tree consists of a single node v , then $\pi(T) = (v)$. Otherwise, let r be the root of the tree and consider the sequence $(a_1(r), \dots, a_w(r))$ of its children. For each $1 \leq i \leq w$, let T_i be the sub-tree of T rooted at the vertex $a_i(r)$. We then let $\pi(T)$ be the concatenation of $\pi(T_1), \pi(T_2), \dots, \pi(T_w)$, with the vertex r appearing at the end of the sequence; see Figure 2 for an illustration. For simplicity, we assume that $V(T_{w,D}) = \{v_1, v_2, \dots, v_{N_{w,D}}\}$, where the vertices are indexed in the order of their appearance in $\pi(T_{w,D})$, so the traversal visits these vertices in this order.

Next, we define a graph $G_{w,D}$, as follows. The vertex set of $G_{w,D}$ is the same as the vertex set of

$T_{w,D}$, namely $V(G_{w,D}) = V(T_{w,D})$. The edge set of $G_{w,D}$ consists of two subsets: $E_1 = E(T_{w,D})$, and another set E_2 of edges that contains, for each $1 \leq i < N_{w,D}$, k parallel copies of the edge (v_i, v_{i+1}) . We then set $E(G_{w,D}) = E_1 \cup E_2$. For convenience, we call the edges of E_1 *blue edges*, and the edges of E_2 *red edges*; see Figures 2 and 3.

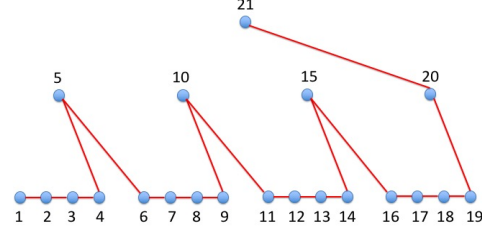
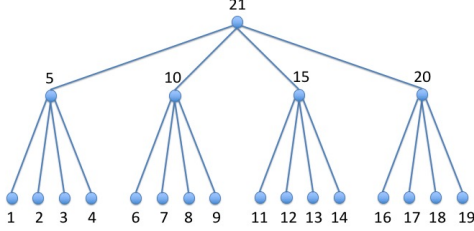


Figure 2: Tree $T_{4,2}$ with vertices indexed according to post-order traversal.

Figure 3: The edge set E_2 in $G_{4,2}$ (only a single copy of each edge is shown).

It is easy to verify that graph $G_{w,D}$ must be k -edge connected, since for any partition of $V(G_{w,D})$, there is some index $1 \leq i < N_{w,D}$ with v_i, v_{i+1} separated by the partition, and so k parallel edges connecting v_i to v_{i+1} must cross the partition.

We now fix an integer $w = k/(2D\alpha\eta)$ (note that $w \geq 2$), and we let $T = T_{w,D}$ be the corresponding tree and $G = G_{w,D}$ the corresponding graph. For convenience, we denote $N_{w,D}$ by N . Recall that $N \leq w^{D+1}/(w-1) = O\left(\left(\frac{k}{2D\alpha\eta}\right)^D\right)$. As observed before, G is k -edge connected. Since the depth of T is D , and $T \subseteq G$, it is easy to see that the diameter of G is at most $2D$.

We now consider any collection $\mathcal{T} = \{T_1, \dots, T_{k/\alpha}\}$ of k/α spanning trees of G that causes edge-congestion at most η . Our goal is to show that some tree $T_i \in \mathcal{T}$ has diameter at least $\frac{1}{4} \cdot \left(\frac{k}{2D\alpha\eta}\right)^D$.

For convenience, we denote $V(G) = V(T) = V$. We say that a vertex $x \in V$ is an *ancestor* of a vertex $y \in V$ if x is an ancestor of y in the tree T , that is, $x \neq y$, and x lies on the unique path connecting y to the root of T .

Let $L \subseteq V$ be the set of vertices that serve as leaves of the tree T . We denote by $u = v_1$ a vertex of L that has the lowest index, and by u' the vertex of L with the largest index. It is easy to see that $u' = v_{N-D}$, as every vertex whose index is greater than that of u' is an ancestor of u' . For each $1 \leq j \leq k/\alpha$, we denote by P_j the unique path that connects u to u' in tree T_j . Let $\mathcal{P} = \{P_j \mid 1 \leq j \leq k/\alpha\}$. It is enough to show that at least one of the paths P_j has length at least $\frac{1}{4} \cdot \left(\frac{k}{2D\alpha\eta}\right)^D$. In order to do so, we show that $\sum_{j=1}^{k/\alpha} |E(P_j)|$ is sufficiently large. At a high level, we consider the red edges (v_i, v_{i+1}) (the edges of E_2), and show that many of the paths in \mathcal{P} must contain copies of each such edge. This in turn will imply that $\sum_{P_j \in \mathcal{P}} |E(P_j)|$ is large, and that some path in \mathcal{P} is long enough.

For each vertex $v_i \in L$ such that $v_i \neq u'$, we let $S_i = \{v_1, \dots, v_i\}$, and we let $\bar{S}_i = \{v_{i+1}, \dots, v_N\}$. Notice that, since $u \in S_i$ and $u' \in \bar{S}_i$, every path in \mathcal{P} must contain an edge of $E_G(S_i, \bar{S}_i)$. Note that the only red edges in $E_G(S_i, \bar{S}_i)$ are the k parallel copies of the edge (v_i, v_{i+1}) . In the next observation, we show that the number of blue edges in $E_G(S_i, \bar{S}_i)$ is bounded by Dw .

Observation 5.2. *For each vertex $v_i \in L$ such that $v_i \neq u'$, for every blue edge $e \in E_G(S_i, \bar{S}_i)$, at least one endpoint of e must be an ancestor of v_i .*

Proof: We consider a natural layout of the tree T , where for every inner vertex x of the tree, its children $a_1(x), \dots, a_w(x)$ are drawn in this left-to-right order (see Figure 4). Consider the path Q connecting the root of T to v_i , so every vertex on Q (except for v_i) is an ancestor of v_i . All vertices lying to the left of Q in the layout are visited before v_i by $\pi(T)$. All vertices lying to the right of Q , and on Q itself (excluding v_i) are visited after v_i . It is easy to see that the vertices of Q separate the two sets in T , and so the only blue edges connecting S_i to \bar{S}_i are edges incident to the vertices of $V(Q) \setminus \{v_i\}$. \square

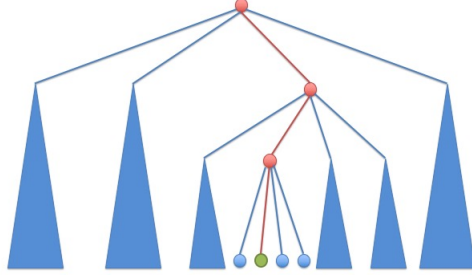


Figure 4: A layout of the tree T . Vertex v_i is shown in green and path Q in red. All vertices lying to the left of Q in this layout appear before v_i in $\pi(T)$, and all vertices lying to the right of Q or on Q (except for v_i) appear after v_i in $\pi(T)$.

Since every vertex of the tree T has at most w children, and since the depth of the tree is D , we obtain the following corollary of Observation 5.2.

Corollary 5.3. *For each vertex $v_i \in L$ such that $v_i \neq u'$, at most Dw blue edges lie in $E_G(S_i, \bar{S}_i)$.*

Since the trees in \mathcal{T} cause edge-congestion η , at most $Dw\eta$ trees of \mathcal{T} may contain blue edges in $E_G(S_i, \bar{S}_i)$. Each of the remaining $\frac{k}{\alpha} - Dw\eta \geq \frac{k}{2\alpha}$ trees contains a copy of the red edge (e_i, e_{i+1}) (recall that $w = k/(2D\alpha\eta)$.) Therefore, $\sum_{P_j \in \mathcal{P}} |E(P_j)| \geq |L| \cdot \frac{k}{2\alpha} \geq \frac{Nk}{4\alpha}$, since $|L| \geq |N|/2$. We conclude that at least one path $P_j \in \mathcal{P}$ must have length at least $\frac{Nk}{4\alpha} / \frac{k}{\alpha} \geq \frac{N}{4}$, and so the diameter of T_j is at least $\frac{N}{4}$. Since $N \geq w^D \geq \left(\frac{k}{2D\alpha\eta}\right)^D$, the diameter of T_j is at least $\frac{1}{4} \cdot \left(\frac{k}{2D\alpha\eta}\right)^D$. \square

We are now ready to complete the proof of Theorem 1.3. First, we show that we can turn the graph G into a simple graph, and ensure that $|V(G)| = n$, if $n \geq 3k \cdot \left(\frac{k}{2D\alpha\eta}\right)^D$. Let $G'_{w,D}$ be the graph obtained from $G_{w,D}$ as follows. For each $1 \leq i \leq N$, we replace the vertex v_i with a set $X_i = \{x_i^1, x_i^2, \dots, x_i^k\}$ of k vertices that form a clique. For each $1 \leq i < N$, the k red edges connecting v_i to v_{i+1} are replaced by the perfect matching $\{(x_i^t, x_{i+1}^t)\}_{1 \leq t \leq k}$ between vertices of X_i and vertices of X_{i+1} . Each blue edge (v_i, v_j) is replaced by a new edge (x_i^1, x_j^1) . Since $n \geq 3k \cdot \left(\frac{k}{2D\alpha\eta}\right)^D > k|V(G)| + k$, we add $n - k|V(G)| > k$ new vertices that form a clique, and for each newly-added vertex, we add an edge connecting it to x_N^1 (recall that the vertex v_N is the root of T). We denote $G' = G'_{w,D}$ for simplicity. It is not hard to see that G' has n vertices and

it is k -edge connected. Moreover, G' has diameter at most $2D + 2$, since its subgraph induced by vertices of $\{x_i^1\}_{1 \leq i \leq N}$ has diameter $2D$, and every other vertex of G' is a neighbor of one of the vertices in $\{x_i^1\}_{1 \leq i \leq N}$. The tree T' is defined exactly as before, except that every original vertex v_j is now replaced with its copy x_j^1 . Let L denote the set of all leaf vertices in T' .

Assume that we are given a collection $\mathcal{T} = \{T_1, \dots, T_{k/\alpha}\}$ of k/α spanning trees of G' that causes edge-congestion at most η . For each $1 \leq i \leq k/\alpha$, we denote by Q_i the unique path that connects x_1^1 to x_{N-D}^1 in T_i and denote $\mathcal{Q} = \{Q_i \mid 1 \leq i \leq k/\alpha\}$. For each every leaf vertex $x_j^1 \in L$, we define a cut (W_j, \overline{W}_j) as follows: $W_j = \bigcup_{1 \leq s \leq j} X_s$ and $\overline{W}_j = V(G') \setminus W_j$. Using reasoning similar to that in Corollary 5.3, it is easy to see that for every leaf vertex $x_j^1 \in L$, the set $E_{G'}(W_j, \overline{W}_j)$ of edges contains at most Dw blue edges – the edges of the tree T' . Since the trees in \mathcal{T} cause edge-congestion at most η , at most $Dw\eta$ trees of \mathcal{T} may contain blue edges in $E_{G'}(W_j, \overline{W}_j)$. Therefore, for each of the remaining $\frac{k}{\alpha} - Dw\eta \geq \frac{k}{2\alpha}$ trees T_i , path Q_i must contain a red edge from $\{(x_j^t, x_{j+1}^t)\}_{1 \leq t \leq k}$. Therefore, the sum of lengths of all paths of \mathcal{Q} is at least $\frac{Nk}{4\alpha}$, and so at least one path $Q_i \in \mathcal{Q}$ must have length at least $\frac{N}{4}$. We conclude that some tree $T_i \in \mathcal{T}$ has diameter at least $\frac{1}{4} \cdot \left(\frac{k}{2D\alpha\eta}\right)^D$.

Lastly, we extend our results to edge-independent trees. We use the same simple graph G' and the same tree T' as before, setting the congestion parameter $\eta = 2$. Assume that we are given a collection $\mathcal{T}' = \{T'_1, \dots, T'_{k/\alpha}\}$ of k/α edge-independent spanning trees of G' and let $x \in V(G')$ be their common root vertex. For each $1 \leq i \leq k/\alpha$, we denote by Q'_i the unique path that connects vertex x_1^1 to vertex x_{N-D}^1 in tree T'_i , and we denote $\mathcal{Q}' = \{Q'_i \mid 1 \leq i \leq k/\alpha\}$. Note that, for each $1 \leq i \leq k/\alpha$, the path Q'_i is a sub-path of the path obtained by concatenating the path Q''_i , connecting x_1^1 to x in T'_i , with the path Q'''_i , connecting x_{N-D}^1 to x in T'_i . Since the trees in \mathcal{T}' are edge-independent, the paths in $\{Q''_i\}_{1 \leq i \leq k/\alpha}$ are edge-disjoint and so are the paths in $\{Q'''_i\}_{1 \leq i \leq k/\alpha}$. Therefore, the paths of \mathcal{Q}' cause edge-congestion at most 2. The remainder of the proof is the same as before and is omitted here.

6 Tree Packing for (k, D) -Connected Graphs: Proof of Theorem 1.4

In this section we provide the proof of Theorem 1.4. Recall that we are given a (k, D) -connected n -vertex graph G . Our goal is to design an efficient randomized algorithm that computes a collection $\mathcal{T} = \{T_1, \dots, T_k\}$ of k spanning trees of G , such that, for each $1 \leq \ell \leq k$, the tree T_ℓ has diameter at most $O(D \log n)$, and with high probability each edge of G appears in $O(\log n)$ trees of \mathcal{T} . Note that we allow the graph G to have parallel edges. However, we can assume w.l.o.g. that for every pair (u, v) of vertices of G , there are at most k parallel edges (u, v) ; all remaining edges can be deleted without violating the (k, D) -connectivity property of G .

The main tool that we use in our proof is the following theorem and its corollary.

Theorem 6.1. *There is an efficient algorithm, that, given a (k, D) -connected graph G , a subset $U \subsetneq V(G)$ of its vertices, and an additional vertex $s \in V(G) \setminus U$, computes a flow f in G with the following properties:*

- *the endpoints of every flow-path lie in $U \cup \{s\}$;*

- for each vertex $u \in U$, the total flow on all paths that originate or terminate at u is at least k ;
- the total amount of flow through any edge is at most 2; and
- each flow-path has length at most $2D$.

Notice that a flow-path is allowed to contain vertices of $U \cup \{s\}$ as inner vertices. We defer the proof of Theorem 6.1 to Section 6.1, after we complete the proof of Theorem 1.4 using it. We obtain the following useful corollary of the theorem.

Corollary 6.2. *There is an efficient algorithm, that, given a (k, D) -connected graph G and a subset $S \subseteq V(G)$ of its vertices, computes a bi-partition (S', S'') of S , and a flow f from vertices of S'' to vertices of S' , such that the following hold:*

- every vertex of S'' sends at least $k/2$ flow units;
- every flow-path has length at most $2D$;
- the total amount of flow through any edge is at most 3; and
- $|S'| \leq \frac{|S|}{2} + 1$.

Proof: Let $s \in S$ be an arbitrary vertex, and set $U = S \setminus \{s\}$. We apply Theorem 6.1 to graph G , vertex set U and the vertex s , to obtain a flow f . Recall that every vertex of U sends or receives at least k flow units, and all flow-paths have length at most $2D$. Let \mathcal{P}' be the set of all paths in G on which a non-zero amount of flow is sent. Since the algorithm in Theorem 6.1 is efficient, we are guaranteed that $|\mathcal{P}'| \leq n^c$ for some constant c , where $n = |V(G)|$. It will be convenient for us to ensure that for every path $P \in \mathcal{P}'$, $f(P)$ is an integral multiple of $1/n^c$. In order to achieve this, for every flow-path $P \in \mathcal{P}'$, we round $f(P)$ up to the next integral multiple of $1/n^c$. Note that this increases the total amount of flow by at most 1, so the total amount of flow through any edge is at most 3.

We now compute a bi-partition (S', S'') of S , as follows. We start from an arbitrary partition (S', S'') . Consider any vertex $v \in S$. For convenience, we direct all flow-paths of \mathcal{P}' for which v serves as an endpoint away from v . Let $q'(v)$ be the total amount of flow that originates at v and terminates at vertices of S' , and define $q''(v)$ similarly for the total amount of flow between v and S'' .

If $v \in S'$, but $q'(v) > q''(v)$, then we move v from S' to S'' . Similarly, if $v \in S''$, but $q''(v) > q'(v)$, then we move v from S'' to S' . Notice that in either case, the total amount of flow between vertices of S' and vertices of S'' increases by at least $1/n^c$. We continue performing these modifications, until for every vertex $v \in S'$, $q'(v) \leq q''(v)$, and for every vertex $v \in S''$, $q''(v) \leq q'(v)$. Since the total amount of flow between S' and S'' grows by at least $1/n^c$ in every iteration, the number of such iterations is bounded by $O(|E(G)| \cdot n^c) = O(\text{poly}(n))$.

Consider the partition (S', S'') of S obtained at the end of this algorithm. Assume w.l.o.g. that $|S'| \leq |S''|$; otherwise we switch S' and S'' . If the vertex s lies in S'' , then we move it to S' . Notice that we are now guaranteed that for every vertex $u \in S''$, $q'(u) \geq q''(u)$, and so at least $k/2$ flow

units are sent between u and the vertices of S' . In order to obtain the final flow f' , we discard from f all flow-paths except those connecting the vertices of S'' to the vertices of S' , and we direct these flow paths towards the vertices of S' . It is easy to verify that $|S'| \leq |S|/2 + 1$. \square

Our algorithm consists of two phases. In the first phase, we define a partition of the vertices of G into layers L_1, \dots, L_h , where $h = O(\log n)$. Additionally, for each $1 \leq i \leq h$, we define a flow f_i in graph G between vertices of L_i and vertices of $L_1 \cup \dots \cup L_{i-1}$. In the second phase, we use the layers and the flows in order to construct the desired set of spanning trees.

Phase 1: partitioning into layers. We use a parameter $h = \Theta(\log n)$, whose exact value will be set later. We now define the layers L_h, \dots, L_1 in this order, and the corresponding flows f_h, \dots, f_1 . In order to define the layer L_h , we let $S = V(G)$, and we apply Corollary 6.2 to the graph G and the set S of its vertices, to obtain a partition (S', S'') of S , with $|S'| \leq |S|/2 + 1$, and the flow f between the vertices of S'' and the vertices of S' , where every vertex of S'' sends at least $k/2$ units of flow, each flow-path has length at most $2D$, and the edge-congestion caused by f is at most 3. We then set $L_h = S''$ and $f_h = f$, and continue to the next iteration.

Assume now that we have constructed L_h, \dots, L_i , we now show how to construct L_{i-1} . Let $S = V(G) \setminus (L_h \cup \dots \cup L_i)$. We apply Corollary 6.2 to the graph G and the set S of its vertices, to obtain a partition (S', S'') of S , with $|S'| \leq |S|/2 + 1$, and the corresponding flow f . We then set $L_{i-1} = S''$, $f_{i-1} = f$, and continue to the next iteration. If we reach an iteration where $|S| \leq 2$, we arbitrarily designate one of the two vertices as s , and we let U be a set of vertices containing the other vertex. We then use Theorem 6.1 in order to find a flow of value at least k between the two vertices, such that the edge-congestion of the flow is at most 2, and every flow-path has length at most $2D$. We then add the vertex that lies in U to the current layer, and the vertex s to the final layer L_1 . If we reach an iteration where $|S| = 1$, then we add the vertex of S to the final layer L_1 and terminate the algorithm. The number h of layers is chosen to be exactly the number of iterations in this algorithm. Notice that $h \leq 2 \log n$ must hold. Observe also that, for all $1 < i \leq h$, flow f_i originates at vertices of L_i , terminates at vertices of $L_1 \cup \dots \cup L_{i-1}$, uses flow-paths of length at most $2D$, and causes edge-congestion at most 3.

Phase 2: constructing the trees. In order to construct the spanning trees T_1, \dots, T_k , we start with letting each tree contain all vertices of G and no edges. We then process every vertex $v \in V(G)$ one-by-one. Assume that $v \in L_i$, for some $1 \leq i \leq h$. Consider the following experiment. Let $\mathcal{Q}(v)$ be the set of all flow-paths that carry non-zero flow in f_i , and connect v to vertices of $L_1 \cup \dots \cup L_{i-1}$. Let $F(v)$ be the total amount of flow f_i on all paths $P \in \mathcal{Q}(v)$; recall that $F(v) \geq k/2$ must hold. We choose a path $P \in \mathcal{Q}(v)$ at random, where the probability to choose a path P is precisely $f_i(P)/F(v)$. We repeat this experiment k times, obtaining paths $P_1(v), \dots, P_k(v)$. For each $1 \leq j \leq k$, we add all edges of $P_j(v)$ to T_j . Consider the graphs T_1, \dots, T_k at the end of this process. Notice that each such graph T_j may not be a tree. We show first that the diameter of each such graph is bounded by $O(D \log n)$.

Claim 6.3. *For all $1 \leq j \leq k$, $\text{diam}(T_j) \leq O(D \log n)$.*

Proof: Fix an index $1 \leq j \leq k$. Let r be the unique vertex lying in L_1 . We prove that for all $1 \leq i \leq h$, for every vertex $v \in L_i$, there is a path connecting v to r in T_j , of length at most

$2D(i-1)$ by induction on i .

The base of the induction is when $i = 1$ and the claim is trivially true. Assume now that the claim holds for layers L_1, \dots, L_{i-1} . Let v be any vertex in layer L_i . Consider the path $P_j(v)$ that we have selected. Recall that this path has length at most $2D$, and it connects v to some vertex $u \in L_1 \cup \dots \cup L_{i-1}$. By the induction hypothesis, there is a path P in T_j of length at most $2D(i-2)$, that connects u to r . Since all edges of $P_j(v)$ are added to T_j , the path $P_j(v)$ is contained in T_j . By concatenating path $P_j(v)$ with path P , we obtain a path connecting v to r , of length at most $2D(i-1)$. \square

Lastly, we prove that with high probability, every edge of G belongs to $O(\log n)$ graphs T_1, \dots, T_k .

Claim 6.4. *With probability at least $(1 - 1/\text{poly}(n))$, every edge of G lies in at most $O(\log n)$ graphs T_1, \dots, T_k .*

The proof follows the standard analysis of the Randomized Rounding technique and is delayed to Section 6.2.

For each $1 \leq j \leq k$, we can now let T'_j be a BFS tree of the graph T_j , rooted at the vertex r . From Claim 6.3, each tree T'_j has diameter at most $O(D \log n)$, and from Claim 6.4, the resulting set of trees cause edge-congestion $O(\log n)$.

6.1 Proof of Theorem 6.1

For every vertex $u \in U$, let $\mathcal{P}(u)$ be the set of all paths in graph G of length at most $2D$, that connect u to vertices of $(U \cup \{s\}) \setminus \{u\}$. Notice that for a pair $u, u' \in U$ of distinct vertices, each path connecting u to u' belongs to both $\mathcal{P}(u)$ and $\mathcal{P}(u')$. Let $\mathcal{P}^* = \bigcup_{u \in U} \mathcal{P}(u)$. We use the following linear program, that has no objective function; our goal will be to find a feasible solution satisfying all constraints.

$$\begin{aligned} \text{(LP-1)} \quad & \sum_{P \in \mathcal{P}(u)} f(P) \geq k \quad \forall u \in U \\ & \sum_{\substack{P \in \mathcal{P}^* \\ e \in P}} f(P) \leq 2 \quad \forall e \in E(G) \\ & f(P) \geq 0 \quad \forall P \in \mathcal{P}^* \end{aligned}$$

Note that, if f is a feasible solution to (LP-1), then it satisfies all requirements of Theorem 6.1. The following claim provides an efficient algorithm for solving (LP-1); its proof uses standard techniques and is deferred to Section 6.3.

Claim 6.5. *There is an efficient algorithm that computes a feasible solution to (LP-1), if such a solution exists.*

It now remains to prove that there is a feasible solution to (LP-1). We do so using the following lemma, that proves a stronger claim, namely that there is an integral solution to (LP-1).

Lemma 6.6. *Let G be a (k, D) -connected graph, let $U \subsetneq V(G)$ be any subset of its vertices, and let $s \notin U$ be any additional vertex. Then there exists a set \mathcal{P} of paths in G , such that:*

- *each path $P \in \mathcal{P}$ connects a pair of distinct vertices in $U \cup \{s\}$;*

- each node in U is the endpoint of at least k paths in \mathcal{P} (but s may serve as an endpoint on fewer paths);
- each path $P \in \mathcal{P}$ has length at most $2D$; and
- each edge of G appears on at most two paths in \mathcal{P} .

Notice that the lemma immediately implies that there is a feasible solution to (LP-1), as we can simply send one unit of flow on each path of \mathcal{P} . We now turn to prove Lemma 6.6.

Proof of Lemma 6.6. The proof relies on a theorem from [CK08], that needs the following definitions.

Definition 2. (Canonical Spider) Let \mathcal{M} be any collection of simple paths, such that each path $P \in \mathcal{M}$ has a distinguished endpoint $t(P)$, and the other endpoint is denoted by $v(P)$. We say that the paths in \mathcal{M} form a canonical spider iff $|\mathcal{M}| > 1$ and there is a vertex v , such that for every path $P \in \mathcal{M}$, $v(P) = v$. Moreover, the only vertex that appears on more than one path of \mathcal{M} is v (see Figure 5). We refer to v as the head of the spider, and the paths of \mathcal{M} are called the legs of the spider.

Definition 3. (Canonical Cycle) Let $\mathcal{M} = \{Q_1, \dots, Q_h\}$ be any collection of simple paths, where each path Q_i has a distinguished endpoint $t(Q_i)$ that does not appear on any other path of \mathcal{M} , and the other endpoint is denoted by $v(Q_i)$. We say that paths of \mathcal{M} form a canonical cycle, iff:

- h is an odd integer;
- for each $1 \leq i \leq h$, there is a vertex $v'(Q_i) \neq v(Q_i)$ on path Q_i , such that $v'(Q_i) = v(Q_{i-1})$ (here we use the convention that $Q_0 = Q_h$); and
- for each $1 \leq i \leq h$, no vertex of Q_i appears on any other path of \mathcal{M} , except for $v'(Q_i)$ that belongs to Q_{i-1} only and $v(Q_i)$ that belongs to Q_{i+1} only (see Figure 5).

Note that the definition of a canonical cycle here is slightly stronger than definition of a canonical cycle in [CK08], since we additionally require that, for each $1 \leq i \leq h$, the vertex $v'(Q_i) \neq v(Q_i)$.

We use the following result of Chuzhoy and Khanna (Theorem 4 in [CK08]). We note that the theorem appearing in [CK08] is slightly weaker since they used a weaker definition of a canonical cycle, but their proof immediately implies the stronger result that we state below.

Theorem 6.7. *There is an efficient algorithm, that, given any collection \mathcal{Q} of paths, where every path $P \in \mathcal{Q}$ has a distinguished endpoint $t(P)$ that does not appear on any other path of \mathcal{Q} , computes, for each path $P \in \mathcal{Q}$, a prefix (i.e. a sub-path of P that contains $t(P)$) $q(P)$, such that, in the graph induced by $\{q(P) \mid P \in \mathcal{Q}\}$, the prefixes appearing in each connected component either form a canonical spider, a canonical cycle, or the connected component contains exactly one prefix $q(P)$, where $q(P) = P$ for some $P \in \mathcal{Q}$.*

Recall that we are given a (k, D) -connected graph G , together with a subset $U \subsetneq V(G)$ of its vertices, that we call *terminals*, and an additional vertex $s \notin U$. From the definition of (k, D) -connectivity, we are guaranteed that every vertex $u \in U$, there is a set $\mathcal{R}(u)$ of k edge-disjoint simple paths in G , of length at most D each, connecting u to s . Let $\mathcal{R} = \bigcup_{u \in U} \mathcal{R}(u)$. Intuitively,

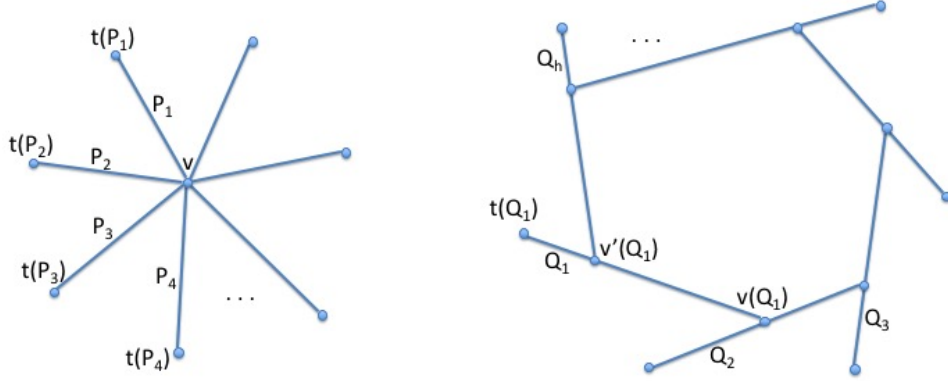


Figure 5: A canonical spider (left) and a canonical cycle (right).

we would like to apply Theorem 6.7 to the set \mathcal{R} of paths, where for each vertex $u \in U$, and for each path $R \in \mathcal{R}(u)$, the distinguished endpoint $t(R)$ is u . The idea is then to use the resulting canonical cycle and canonical spider structures in order to connect the vertices of U to each other and to s via short paths that are disjoint in their edges, thus constructing the collection \mathcal{P} of paths. For example, if a set \mathcal{M} of prefixes of the paths in \mathcal{R} form a canonical spider, we can partition the legs of the spider into pairs, and each pair then defines a path connecting two vertices of U to each other, which is then added to \mathcal{P} . There are two problems with this approach. The first problem is that Theorem 6.7 requires that the distinguished endpoints $t(P)$ of the paths $P \in \mathcal{R}$ are distinct from each other, and moreover that $t(P)$ does not lie on any other path of \mathcal{R} . This difficulty is easy to overcome by making k copies of every terminal $u \in U$ and then modifying the paths in $\mathcal{R}(u)$ so that each of them starts from a different copy. The second difficulty is that it is possible that some resulting set \mathcal{M} of prefixes that forms a canonical spider consists entirely of paths that belong to a single set $\mathcal{R}(u)$, and so the spider cannot be used to connect distinct vertices of U to each other. The reason that this may happen is that the paths in $\mathcal{R}(u)$ are only guaranteed to be edge-disjoint, and so they may share vertices. If, in contrast, they were internally vertex-disjoint, then such a problem would not arise. In order to overcome these difficulties, we slightly modify the graph G , first by replacing it with its line graph, so that any set of edge-disjoint paths in G corresponds to a set of internally node-disjoint paths in the line graph, and then creating k copies of each terminal $u \in U$. We now describe the construction of the modified graph H , in two steps.

In the first step, we construct the line graph L of G , as follows: the vertex set $V(L)$ contains a vertex v_e for each edge $e \in E(G)$. Given a pair $v_e, v_{e'}$ of vertices of L , we connect them with an edge iff e and e' share an endpoint in G .

Let H be the graph obtained from graph L by adding, for each terminal $u \in U$, a collection $\{u_1, \dots, u_k\}$ of k vertices, that we call the *copies* of u . For each such new vertex u_i , and for every edge e that is incident to u in G , we add the edge (u_i, v_e) to the graph. Additionally, we add the vertex s to the graph, and connect it to every vertex v_e where e is an edge incident to s in G .

Recall that we have defined, for every vertex $u \in U$, a collection $\mathcal{R}(u)$ of k edge-disjoint simple paths in G of length at most D each, connecting u to s . Denote $\mathcal{R}(u) = \{R_1(u), \dots, R_k(u)\}$. We transform the set $\mathcal{R}(u)$ of paths into a set $\mathcal{R}'(u)$ of k paths in graph H , that are internally vertex-disjoint, and each path connects a distinct copy of u to s . In order to do so, fix some $1 \leq i \leq k$, and consider the path $R_i(u)$. Let $e_1^i, e_2^i, \dots, e_r^i$ be the sequence of edges on the path $R_i(u)$, with e_1^i incident to u and e_r^i incident to s . Consider the following sequence of vertices in graph H : $(u_i, v_{e_1^i}, v_{e_2^i}, \dots, v_{e_r^i}, s)$. It is easy to verify that this vertex sequence defines a path in graph H , that we denote by $R'_i(u)$. Let $\mathcal{R}'(u) = \{R'_i(u) \mid 1 \leq i \leq k\}$ be the resulting set of paths. Since the paths in $\mathcal{R}(u)$ are edge-disjoint, it is immediate to verify that the paths in $\mathcal{R}'(u)$ are internally node-disjoint; in fact the only vertex that these paths share is the vertex s . The number of inner vertices on each such path is at most D . For each path $R'_i(u)$, we let its distinguished endpoint $t(R'_i(u))$ be the vertex u_i . Lastly, we let $\mathcal{Q} = \bigcup_{u \in U} \mathcal{R}'(u)$. Observe that for every path $R \in \mathcal{Q}$, the distinguished endpoint $t(R)$ does not lie on any other paths of \mathcal{Q} .

We apply Theorem 6.7 to the resulting set \mathcal{Q} of paths and obtain, for each path $P \in \mathcal{Q}$, a prefix $q(P)$. Let \hat{H} be the subgraph of H that is induced by all edges and vertices that appear on the paths in $\{q(P) \mid P \in \mathcal{Q}\}$. Let \mathcal{C} be the set of all connected components of \hat{H} . For every component $C \in \mathcal{C}$, we denote by $\mathcal{Q}(C) \subseteq \mathcal{Q}$ the set of paths whose prefixes are contained in C , and we denote by $\tilde{\mathcal{Q}}(C) = \{q(P) \mid P \in \mathcal{Q}(C)\}$ the corresponding set of prefixes, so $C = \bigcup_{P' \in \tilde{\mathcal{Q}}(C)} P'$.

Next, for every component $C \in \mathcal{C}$, we define a collection $\mathcal{P}(C)$ of paths in the original graph G , with the following properties:

- P1. an edge of G may lie on at most two paths in $\mathcal{P}(C)$;
- P2. the paths in $\mathcal{P}(C)$ only contain edges $e \in E(G)$ with $v_e \in V(C)$;
- P3. for every terminal $u \in U$, the number of paths of $\mathcal{P}(C)$ for which u serves as an endpoint is at least as large as the number of paths of $\mathcal{R}'(u)$ that lie in $\mathcal{Q}(C)$; and
- P4. every path in $\mathcal{P}(C)$ has length at most $2D$;

Assume first that we have computed, for every component $C \in \mathcal{C}$, a set $\mathcal{P}(C)$ of paths in graph G with the above properties. We then set $\mathcal{P} = \bigcup_{C \in \mathcal{C}} \mathcal{P}(C)$. It is easy to verify that set \mathcal{P} has all required properties. Indeed, since the components of \mathcal{C} are disjoint in their vertices, Properties P1 and P2 ensure that every edge of G belongs to at most two paths of \mathcal{P} . Since, for every terminal $u \in U$, $|\mathcal{R}'(u)| = k$, Property P3 ensures that u serves as an endpoint of at least k paths in \mathcal{P} . Lastly, Property P4 ensures that the length of every path in \mathcal{P} is at most $2D$.

From now on we fix a component $C \in \mathcal{C}$. It is now sufficient to show an efficient algorithm for constructing the set $\mathcal{P}(C)$ of paths in graph G with Properties P1—P4. Recall that Theorem 6.7 guarantees that the prefixes in $\tilde{\mathcal{Q}}(C)$ either form a canonical spider, or they form a canonical cycle, or $\tilde{\mathcal{Q}}(C)$ consists of a single path $q(P) = P$ for some path $P \in \mathcal{Q}$. We consider each of these different cases in turn; for the case of canonical spider we need to consider two sub-cases, depending on whether the head of the spider is s or not.

Case 1: This case happens if $\tilde{\mathcal{Q}}(C)$ contains a single path, or if the paths of $\tilde{\mathcal{Q}}(C)$ form a canonical spider, whose head is s . In either case, from the construction of the paths in \mathcal{Q} , it is easy to verify

that for every path $P \in \mathcal{Q}(C)$, the prefix $q(P)$ is the path P itself. For each path $P \in \tilde{\mathcal{Q}}(C)$, we define a path P' in graph G , as follows. Assume that $P = (u_i, v_{e_1}, v_{e_2}, \dots, v_{e_r}, s)$. We then let P' be a path in graph G , that starts at the terminal u , traverses the edges e_1, \dots, e_r in this order, and terminates at s . Let $\mathcal{P}(C) = \{P' \mid P \in \tilde{\mathcal{Q}}(C)\}$. Since the paths in $\tilde{\mathcal{Q}}(C)$ are vertex-disjoint except for sharing the vertex s , the paths in $\mathcal{P}(C)$ are all edge-disjoint. It is easy to verify that Properties P1—P4 hold for $\mathcal{P}(C)$.

Case 2: This case happens if the paths in $\tilde{\mathcal{Q}}(C)$ form a canonical spider, whose head is not s . Note that, from the definition of the paths in \mathcal{Q} , the head of the spider must be some vertex v_{e^*} with $e^* \in E(G)$. We denote $e^* = (x, y)$. Note that every path $P \in \mathcal{Q}(C)$ contains the vertex v_{e^*} . Therefore, each such path must belong to a different set $\mathcal{R}'(u)$, and no two paths in $\mathcal{Q}(C)$ may originate from two copies of the same terminal. For every path $P \in \tilde{\mathcal{Q}}(C)$, we define a new path P' in graph G , as follows. Assume that the sequence of vertices on P is $(u_i, v_{e_1}, v_{e_2}, \dots, v_{e_r}, v_{e^*})$, then we let path P' start at the terminal u , and then traverse the edges e_1, e_2, \dots, e_r in this order. Note that path P' has to terminate at a vertex that serves as an endpoint of e^* . We define two sets of paths: set S_x contains all paths P' for $P \in \tilde{\mathcal{Q}}(C)$ that terminate at x , and set S_y is defined similarly for y . Therefore, $|S_x| + |S_y| = |\tilde{\mathcal{Q}}(C)|$. From the above discussion, every path in $S_x \cup S_y$ originates at a distinct terminal.

Assume first that $|S_x| > 1$ and $|S_y| > 1$. Consider the set S_x of paths. We construct a set Π_x of pairs of paths from S_x as follows. If $|S_x|$ is even, then we simply partition all paths in S_x into $|S_x|/2$ disjoint pairs. Otherwise, if $|S_x|$ is odd, then we construct $(|S_x| + 1)/2$ pairs, such that every path of S_x belongs to exactly one pair in Π_x , except for one arbitrary path that belongs to two pairs. Consider now any pair (P'_1, P'_2) of paths in Π_x . As observed before, the two paths must originate at distinct terminals. We construct a new path by concatenating P'_1 with P'_2 , and add this path to $\mathcal{P}(C)$. We process the paths of S_y similarly. Notice that every prefix in $\tilde{\mathcal{Q}}(C)$ is now a sub-path of either one or two paths in $\mathcal{P}(C)$. Since the paths in $\tilde{\mathcal{Q}}(C)$ are internally vertex disjoint, and since the edge e^* is not included in any of the paths in $S_x \cup S_y$, every edge of G may belong to at most two paths of $\mathcal{P}(C)$. It is immediate to verify that Properties P1—P4 hold in $\mathcal{P}(C)$.

Assume now that $|S_x| = 1$ or $|S_y| = 1$ (or both). We assume w.l.o.g. that $|S_y| = 1$. We construct the set Π_x of pairs of paths in S_x exactly as before (if $|S_x| = 1$ then $\Pi_x = \emptyset$). For every pair (P'_1, P'_2) of paths in Π_x , we construct a new path that is added to $\mathcal{P}(C)$ exactly as before. Additionally, we choose an arbitrary path $P'_i \in S_x$ that participates in at most one pair in Π_x (notice that such a path has to exist). Let P' be the unique path in S_y . As observed before, the two paths must originate from distinct terminals. We construct a new path in graph G , by concatenating the path P'_i , the edge e^* , and the path P' . We add the resulting path to $\mathcal{P}(C)$. It is easy to verify that the resulting set $\mathcal{P}(C)$ of paths satisfy Properties P1—P4.

Case 3: This case happens if the paths in $\tilde{\mathcal{Q}}(C)$ form a canonical cycle. We denote the paths of $\tilde{\mathcal{Q}}(C)$ by Q_1, \dots, Q_h in the order of their appearance on the cycle. We define the following set of pairs of these paths: $\Pi = \{(Q_1, Q_2), (Q_3, Q_4), \dots, (Q_{h-2}, Q_{h-1}), (Q_{h-1}, Q_h)\}$ (recall that h is an odd integer). Notice that every path appears in exactly one pair of Π , except for the path Q_{h-1} , that appears in two pairs.

Consider now some pair $(Q_i, Q_{i+1}) \in \Pi$. We construct a two-legged spider S_i , that consists of the

path Q_i , and the sub-path of Q_{i+1} , from $t(Q_{i+1})$ to $v'(Q_{i+1}) = v(Q_i)$. In the resulting collection $S_1, S_3, \dots, S_{h-2}, S_{h-1}$ of spiders, every pair of spiders are mutually vertex-disjoint, except for the vertices of Q_{h-1} that may appear in two spiders. We process each one of these spiders as in Case 2, to obtain a collection $\mathcal{P}(C)$ of $(h+1)/2$ paths in graph G that cause edge-congestion at most 2, and that satisfy Properties P1–P4. \square

6.2 Proof of Claim 6.4

Let f be the flow obtained by taking the union of the flows f_1, \dots, f_h . It is easy to verify that flow f causes edge-congestion at most $4h \leq 8 \log n$. For every edge $e \in E(G)$, we say that a bad event $B(e)$ happens if e lies in more than $120 \log n$ graphs T_1, \dots, T_k . It is enough to show that for each edge $e \in E(G)$, the probability of the event $B(e)$ is bounded by $1/n^6$; from the union bound over all edges e , it then follows that with probability at least $(1 - 1/n^3)$, the graphs in $\{T_1, \dots, T_k\}$ cause edge-congestion at most $120 \log n$ (we have used the fact that for every pair (u, v) of vertices of G , there are at most k parallel edges (u, v) in G , and that $k \leq n$).

For the remainder of the proof, we fix an edge $e \in E(G)$, and we prove that the probability of event $B(e)$ is at most $1/n^6$.

For every vertex $v \in V(G)$, and index $1 \leq j \leq k$, we let $X(v, j)$ be a random variable whose value is 1 if the path $P_j(v)$ contains the edge e , and it is 0 otherwise. Notice that, if we denote $S = \sum_{v \in V(G)} \sum_{j=1}^k X(v, j)$, then the number of graphs T_1, \dots, T_k to which edge e belongs is exactly S . Moreover, the random variables in $\{X(v, j) \mid v \in V(G), 1 \leq j \leq k\}$ are independent from each other. Consider some vertex $v \in V(G)$, and let $F(v, e)$ be the total amount of flow that f sends on all flow-paths that originate from v and contain the edge e . Notice that for each $1 \leq j \leq k$, the probability that $X(v, j) = 1$ is $F(v, e)/F(v)$. Therefore, the expectation of $\sum_{1 \leq j \leq k} X(v, j) = k \cdot F(v, e)/F(v) \leq 2F(v, e)$, since $F(v) \geq k/2$. Altogether, the expectation of $S = \sum_{v \in V(G)} \sum_{1 \leq j \leq k} X(v, j)$ is at most $2 \sum_{v \in V(G)} F(v, e)$, which is precisely the total amount of flow traversing e in f times 2, and is bounded by $8h \leq 16 \log n$. To summarize, we are given a collection $\{X(v, j) \mid v \in V(G), 1 \leq j \leq k\}$ of independent 0/1 random variables. The expectation of their sum is at most $16 \log n$. We need to bound the probability that $S > 120 \log n$.

We use the following standard Chernoff bound (see e.g. [DP09]).

Theorem 6.8. *Let $\{Y_1, \dots, Y_r\}$ be a collection of independent random variables taking values in $[0, 1]$, and let $Y = \sum_i Y_i$. Assume that $\mathbf{E}[Y] \leq \mu$ for some value μ . Then for all $0 < \epsilon < 1$:*

$$\Pr[Y > (1 + \epsilon)\mu] \leq e^{-\epsilon^2 \mu / 3}.$$

Using the above bound with $\epsilon = 1/2$ and $\mu = 80 \log n$, we get that the probability that $S > 120 \log n$ is bounded by $e^{-80 \log n / 12} < 1/n^6$.

6.3 Proof of Claim 6.5

We rename (LP-1) by (LP-Primal-1). Consider the following LP.

$$\begin{aligned}
 (\text{LP-Primal-2}) \quad & \text{maximize } 0 \\
 \text{s.t.} \quad & \\
 & \sum_{P \in \mathcal{P}(u)} f(P) \geq k \quad \forall u \in U \\
 & \sum_{\substack{P \in \mathcal{P}^* \\ e \in P}} f(P) \leq 2 \quad \forall e \in E(G) \\
 & f(P) \geq 0 \quad \forall P \in \mathcal{P}^*
 \end{aligned}$$

It is clear that any feasible solution to (LP-Primal-1) is also a feasible solution to (LP-Primal-2), and vice versa. It is therefore sufficient to show that (LP-Primal-2) can be solved efficiently, if it has a feasible solution. Below is the Dual LP for (LP-Primal-2).

$$\begin{aligned}
 (\text{LP-Dual-1}) \quad & \text{minimize } 2 \cdot \sum_{e \in E(G)} \ell_e - k \cdot \sum_{u \in U} z_u \\
 \text{s.t.} \quad & \\
 & \sum_{e \in P} \ell_e \geq z_u + z_{u'} \quad \forall u, u' \in U : u \neq u', \forall P \in \mathcal{P}(u) \cap \mathcal{P}(u') \\
 & \sum_{e \in P} \ell_e \geq z_u \quad \forall u \in U, \forall P \in \mathcal{P}(u) \cap \mathcal{P}(s) \\
 & z_u \geq 0 \quad \forall u \in U \\
 & \ell_e \geq 0 \quad \forall e \in E(G)
 \end{aligned}$$

Recall that the number of vertices in G is n . Note that for (LP-Primal-2), the number of variables is exponential in n and the number of constraints is polynomial in n , while for (LP-Dual-1), the number of variables is polynomial in n and the number of constraints can be exponential in n . From the strong duality, the optimal objective value of (LP-Dual-1) is 0 if (LP-Primal-2) is feasible. We make a change to (LP-Dual-1) by replacing the objective function with a constraint that $2 \cdot \sum_{e \in E(G)} \ell_e - k \cdot \sum_{u \in U} z_u = 0$ to get the following LP.

$$\begin{aligned}
 (\text{LP-Dual-2}) \quad & \\
 & 2 \cdot \sum_{e \in E(G)} \ell_e - k \cdot \sum_{u \in U} z_u = 0 \\
 & \sum_{e \in P} \ell_e \geq z_u + z_{u'} \quad \forall u, u' \in U : u \neq u', \forall P \in \mathcal{P}(u) \cap \mathcal{P}(u') \\
 & \sum_{e \in P} \ell_e \geq z_u \quad \forall u \in U, \forall P \in \mathcal{P}(u) \cap \mathcal{P}(s) \\
 & z_u \geq 0 \quad \forall u \in U \\
 & \ell_e \geq 0 \quad \forall e \in E(G)
 \end{aligned}$$

Claim 6.9. *There exists an efficient separation oracle to (LP-Dual-2).*

We provide the proof of Claim 6.9 below, after we show that there is an efficient algorithm that solves (LP-Primal-2) using it. We run the Ellipsoid Algorithm on (LP-Dual-2) using the separation oracle, and let \mathcal{C} be the set of all violated constraints that the oracle returns. Note that, since the running time of the Ellipsoid Algorithm is polynomial in the number of variables, when we run the Ellipsoid Algorithm on (LP-Dual-2), the size of \mathcal{C} , which is the number of violated constraints returned by the separation oracle, is at most polynomial in n . Let (LP-Dual-3) be a linear program

whose set of constraints is precisely \mathcal{C} . Note that the linear program (LP-Dual-3) is feasible iff the linear program (LP-Dual-2) is feasible. This is because, if we run the Ellipsoid Algorithm on (LP-Dual-3), then the separation oracle will return the same set of constraints and the algorithm will return the same solution or report infeasible (if it reports infeasible on (LP-Dual-2)). We now compute the dual of (LP-Dual-3) and obtain a linear program that we denote by (LP-Primal-3). It is not hard to see that (LP-Primal-3) contains a subset (whose size is polynomial in n) of variables of (LP-Primal-2), and that for every constraint of (LP-Primal-2), there is a constraint in (LP-Primal-3), with the variables which are not in that subset omitted. From the strong duality, (LP-Primal-3) is feasible if (LP-Primal-2) is feasible. We can now solve (LP-Primal-3) efficiently, and the resulting solution is a feasible solution to (LP-Primal-2), as this is the same as setting all variables that do not correspond to the constraints in \mathcal{C} to 0. This finishes the proof of Claim 6.5.

Proof of Claim 6.9: We now show that there exists a separation oracle to (LP-Dual-2). Given a suggested solution to (LP-Dual-2), the separation oracle needs to check if it satisfies all the constraints of (LP-Dual-2), and if not, return a violated constraint.

Let $\{z_u\}_{u \in U}, \{\ell_e\}_{e \in E(G)}$ be the suggested solution in an iteration. It is immediate to check whether the constraints $z_u \geq 0 \ \forall u \in U$, the constraints $\ell_e \geq 0 \ \forall e \in E(G)$ and the constraint $2 \cdot \sum_{e \in E(G)} \ell_e - k \cdot \sum_{u \in U} z_u = 0$ are satisfied. We will now show an efficient algorithm that checks whether the suggested solution satisfies the constraints $\sum_{e \in P} \ell_e \geq z_u + z_{u'} \ \forall u, u' \in U : u \neq u', \forall P \in \mathcal{P}(u) \cap \mathcal{P}(u')$ and the constraints $\sum_{e \in P} \ell_e \geq z_u \ \forall u \in U, \forall P \in \mathcal{P}(u) \cap \mathcal{P}(s)$ efficiently.

We assign each edge $e \in E(G)$ length ℓ_e . For any path P of G , we denote $\ell(P) = \sum_{e \in P} \ell_e$. Note that $U \subseteq V(G)$. We show an algorithm, that, given the suggested solution $\{z_u\}_{u \in U}, \{\ell_e\}_{e \in E(G)}$, either claims (correctly) that all constraints $\sum_{e \in P} \ell_e \geq z_u + z_{u'} \ \forall u, u' \in U : u \neq u', \forall P \in \mathcal{P}(u) \cap \mathcal{P}(u')$ and all constraints $\sum_{e \in P} \ell_e \geq z_u \ \forall u \in U, \forall P \in \mathcal{P}(u) \cap \mathcal{P}(s)$ are satisfied, or returns a pair u, u' of distinct vertices of U and a path $\hat{P}_{u,u'} \in \mathcal{P}(u) \cap \mathcal{P}(u')$, such that $\ell(\hat{P}_{u,u'}) < z_u + z_{u'}$ (which means that the constraint $\sum_{e \in \hat{P}_{u,u'}} \ell_e \geq z_u + z_{u'}$ is not satisfied by the suggested solution), or returns a vertex $u \in U$ and a path $\hat{P}_{u,s} \in \mathcal{P}(u) \cap \mathcal{P}(s)$, such that $\ell(\hat{P}_{u,s}) < z_u$ (which means that the constraint $\sum_{e \in \hat{P}_{u,s}} \ell_e \geq z_u$ is not satisfied by the suggested solution).

Claim 6.10. *There is an efficient algorithm, that, given any pair v, v' of vertices of G , computes the shortest path (with respect to edge lengths $\{\ell_e\}_{e \in E(G)}$) connecting v to v' that contains at most $2D$ edges.*

We will prove Claim 6.10 below, after we complete the proof of Claim 6.9 using it. For every pair $u, u' \in U$ of distinct vertices of U , let $\hat{P}_{u,u'}$ be the path returned by the algorithm in Claim 6.10, we check if $\ell(\hat{P}_{u,u'}) < z_u + z_{u'}$. For every vertex $u \in U$, let $\hat{P}_{u,s}$ be the path returned by the algorithm in Claim 6.10, we check if $\ell(\hat{P}_{u,s}) < z_u$. If there exists a pair $u, u' \in U$ of distinct vertices of U such that $\ell(\hat{P}_{u,u'}) < z_u + z_{u'}$, by definition, $\sum_{e \in \hat{P}_{u,u'}} \ell_e = \ell(\hat{P}_{u,u'}) < z_u + z_{u'}$. In this case, we claim that the constraint $\sum_{e \in \hat{P}_{u,u'}} \ell_e \geq z_u + z_{u'}$ is violated, and return this constraint as a violated constraint.

If there does not exist a pair $u, u' \in U$ of distinct vertices of U such that $\ell(\hat{P}_{u,u'}) < z_u + z_{u'}$, then from Claim 6.10, for any pair u, u' of distinct vertices of U , for any path $P \in \mathcal{P}(u) \cap \mathcal{P}(u')$, we have $\sum_{e \in P} \ell_e \geq z_u + z_{u'}$. In this case, we know that all constraints $\sum_{e \in P} \ell_e \geq z_u + z_{u'} \ \forall u, u' \in U : u \neq u', \forall P \in \mathcal{P}(u) \cap \mathcal{P}(u')$ are satisfied, so we then proceed to check if there exists a vertex $u \in U$ such that $\ell(\hat{P}_{u,s}) < z_u$. If there does exist such a vertex u , by definition, $\sum_{e \in \hat{P}_{u,s}} \ell_e = \ell(\hat{P}_{u,s}) < z_u$.

In this case, we claim that the constraint $\sum_{e \in \hat{P}_{u,s}} \ell_e \geq z_u$ is violated, and return this constraint as a violated constraint. If there does not exist a vertex $u \in U$ such that $\ell(\hat{P}_{u,s}) < z_u$, then from Claim 6.10, for vertex $u \in U$, for any path $P \in \mathcal{P}(u) \cap \mathcal{P}(s)$, we have $\sum_{e \in P} \ell_e \geq z_u$. We then claim that all constraints $\sum_{e \in P} \ell_e \geq z_u + z_{u'} \forall u, u' \in U : u \neq u', \forall P \in \mathcal{P}(u) \cap \mathcal{P}(u')$ and all constraints $\sum_{e \in P} \ell_e \geq z_u \forall u \in U, \forall P \in \mathcal{P}(u) \cap \mathcal{P}(s)$ are satisfied.

This finishes the description of the separation oracle to (LP-Dual-2). Since it is clear that the running time of the separation oracle is polynomial in n , this finishes the proof of Claim 6.9.

Proof of Claim 6.10: The algorithm employs dynamic programming. It is convenient to view the algorithm as constructing $2D + 1$ dynamic programming tables $\{\Pi_i\}_{0 \leq i \leq 2D}$. For each $0 \leq i \leq 2D$ and each pair v, v' of vertices of G , the table Π_i contains an entry $\Pi_i(v, v')$, that stores the shortest path $P_{v,v'}^i$ (with respect to edge lengths $\{\ell_e\}_{e \in E(G)}$) among all paths in G that connects v to v' and contains at most i edges, together with its length $\ell(P_{v,v'}^i)$. So each entry $\Pi_i(v, v')$ has the form $\Pi_i(v, v') = (P_{v,v'}^i, L_{v,v'}^i)$ where $L_{v,v'}^i = \ell(P_{v,v'}^i)$. When such a path does not exist, we set $P_{v,v'}^i$ to be a default value \perp and set $L_{v,v'}^i = +\infty$.

We now describe how to compute the entries of dynamic programming tables. First we initialize the entries in Π_0 . For each vertex v , we set $P_{v,v}^0$ to be the path that contains a single node v , and we set $L_{v,v}^0 = 0$. For each pair v, v' of distinct vertices of G , we set $P_{v,v'}^0 = \perp$ and $L_{v,v'}^0 = +\infty$. For each $1 \leq i \leq 2D$, the table Π_i is computed based on G and the table Π_{i-1} as follows. For each vertex $v \in V(G)$, we denote $N(v) \subseteq V(G)$ to be the set of neighbors of v in G . For each pair $v, v' \in V(G)$, we set

$$L_{v,v'}^i = \min\{L_{v,v'}^{i-1}, \min_{w \in N(v)} \{\ell_{(v,w)} + L_{w,v'}^{i-1}\}\}.$$

For $P_{v,v'}^i$, we set it to be \perp if $L_{v,v'}^i = +\infty$; we set it to be the same path as $P_{v,v'}^{i-1}$ if $L_{v,v'}^{i-1} \leq \min_{w \in N(v)} \{\ell_{(v,w)} + L_{w,v'}^{i-1}\}$; and if $w' = \arg \min\{L_{v,v'}^{i-1}, \min_{w \in N(v)} \{\ell_{(v,w)} + L_{w,v'}^{i-1}\}\}$ and $\ell_{(v,w')} + L_{w',v'}^{i-1} < L_{v,v'}^{i-1}$, we set it to be the concatenation of the edge (v, w') and the path $P_{w',v'}^{i-1}$.

Finally, given a pair v, v' of vertices of G , we return the path $P_{v,v'}^{2D}$ if $P_{v,v'}^{2D} \neq \perp$, and we claim that such a path does not exist if $P_{v,v'}^{2D} = \perp$. □ □

7 Applications to Distributed Computation

In this section, we provide applications of our graph theoretic results to distributed and secure computation, proving Theorems 1.5, 1.6 and 1.7. Throughout, we use the standard CONGEST model [Pel00], where the algorithm's execution proceeds in synchronous rounds, and in every round, each node can send a message of size $O(\log n)$ to each of its neighbors. Each node holds a processor with a unique and arbitrary ID of $O(\log n)$ bits. As common in this model, we restrict attention to simple graphs with no parallel edges. Our algorithms make extensive use of the random delay approach of [LMR94, Gha15b].

Theorem 7.1 ([Gha15b, Theorem 1.3]). *Let G be a graph and let A_1, \dots, A_m be m distributed algorithms in the CONGEST model, where each algorithm takes at most d rounds, and where for each edge $e \in E(G)$, the total number of messages sent over e by all these algorithms is at most c . Then, there is a randomized distributed algorithm (that uses private randomness), that, with*

high probability, produces a schedule that runs all the algorithms in $O(c + d \cdot \log n)$ rounds, after $O(d \log^2 n)$ rounds of pre-computation.

Throughout, we assume that $k = \Omega(\log n)$ and consider a k -edge connected n -vertex graph $G = (V, E)$. All presented algorithms are randomized, and their correctness hold with probability at least $1 - 1/n^c$ for some constant c (that we refer to as *high probability*). The starting point for all the applications considered in this section is the computation of $\Omega(k)$ subgraphs G_1, \dots, G_k of G with bounded congestion, such that each subgraph has a small diameter. The subgraphs G_i are given in a distributed manner where each edge (u, v) knows the indices of the subgraphs G_i to which it belongs.

Claim 7.2 (Basic Distributed Tool). *There is a randomized algorithm that, given a k -edge connected n -vertex graph G and a congestion bound $\eta \in [1, k]$, computes, in $\tilde{O}((101k \ln n / \eta)^D)$ rounds, a collection of k spanning trees that cause total edge-congestion at most $O(\eta \cdot \log n)$, and have diameter at most $O((101k \ln n / \eta)^D)$ each. Moreover, the algorithm can compute k spanning subgraphs with similar congestion and diameter bounds in $O(D + \eta \log n)$ rounds. The round complexity, the diameter, and the congestion bounds hold with high probability.*

Proof: Let T be a BFS tree of the graph G of depth at most D , computed from an arbitrary source vertex $s \in G$. The algorithm computes a collection of k subgraphs G_1, \dots, G_k which will be shown to cause bounded congestion and have bounded diameter. For every $i \in \{1, \dots, k\}$ in parallel, each subgraph G_i is computed by sampling each edge $e \in G$ into G_i with probability $p = 707 \log n / k$, and additionally sampling each edge $e' \in T$ into G_i with probability η / k , independently from all other edges. In other words, $G_i = G[p] \cup T[\eta/k]$. In the distributed setting, the edge sampling is made by the edge endpoint of larger ID. Each node u sends its lower-ID neighbor v the indices i such that edge $e = (u, v)$ is in G_i . Next, the algorithm computes a truncated BFS tree T_i , up to depth $d = O((101k \ln n / \eta)^D)$, in every sampled subgraph G_i in parallel, using the random delay approach from Theorem 7.1.

In order to analyze this algorithm, we start by showing that w.h.p., the diameter of each subgraph G_i is bounded by d . Indeed, by Theorem 4.1, each subgraph $G[p]$ for $p = 707 \log n / k$ is connected with high probability. By Theorem 3.2, the diameter of each subgraph $G_i = G[p] \cup T[\eta/k]$ is at most $O((101k \ln n / \eta)^D)$ with high probability. Next, we bound the congestion. A simple application of the Chernoff bound shows that, with high probability, each edge of G appears in at most $O(\eta \log n)$ subgraphs. A single BFS computation up to depth d takes $O(d)$ rounds, while sending $O(1)$ messages on each of the graph edges. Thus, by applying the random delay approach, one can compute all k BFS trees in G_1, \dots, G_k in $\tilde{O}(d + \eta)$ rounds. Since the diameter of each graph G_i is at most d , all resulting trees are indeed spanning with high probability. Note that, if we only need to compute spanning subgraphs of G , then the collection $\{G_1, \dots, G_k\}$ of such subgraphs can indeed be computed in $O(D + \eta \cdot \log n)$ rounds. To see this observe that the BFS computation can be done in $O(D)$ rounds. The larger-ID endpoint u of each edge (u, v) has $\eta \log n$ messages to send to its endpoint v containing the indices of the subgraphs to which (u, v) belongs. \square

7.1 Distributed Approximate Verification of the Edge Connectivity

We show the following immediate application of Theorem 4.1 to verify if the graph is λ -edge connected, up to approximation factor $O(\log n)$. Given a graph $G = (V, E)$ and integer λ , if the

graph is λ -edge connected then all nodes must YES, and if the graph is at most $\lambda/\log n$ connected, all nodes must output NO. The algorithm succeeds with high probability in $\tilde{O}((\lambda \log^2 n)^{D(D+1)/2})$ rounds.

Theorem 7.3 (*$O(\log n)$ -Approximate Verification of λ -Edge Connectivity*). *There is a randomized distributed algorithm, that, given an unweighted n -vertex graph $G = (V, E)$ of diameter D , and an integer λ , ensures that with high probability, after $\tilde{O}((\lambda \log^2 n)^{D(D+1)/2})$ rounds, if G is λ -edge connected, then all nodes output YES, and if it is at most $\lambda/\log n$ -edge connected, then all nodes output NO.*

Proof: Let $p = 707 \log n / \lambda$. By Theorem 4.1, if the graph G is λ -edge connected, then the sampled graph $G[p]$ is connected with high probability. Moreover, the diameter of $G[p]$ is bounded by $O(\lambda^{D(D+1)/2})$ with high probability. On the other hand, if the graph connectivity is $\lambda' \leq \lambda/\log n$, then $G[p]$ is connected with probability at most $3/4$. We will then make $O(\log n)$ edge-sampling experiments to distinguish between these two scenarios.

For every $j \in [1, \Theta(\log n)]$, let $G_j = G[p]$, i.e., sample each edge in G_j independently with probability p . Compute a truncated BFS tree up to depth $\lambda^{D(D+1)/2}$. If this tree spans all vertices of $V(G)$, then we say that graph G_j is *good*. The algorithm returns YES if at least 0.9 of the experiments are good.

The round complexity is simply $O(\lambda^{D(D+1)/2} \cdot \log n)$. We now consider correctness. If the graph is λ -edge connected, w.h.p. all experiments are good and therefore all nodes say YES. If the graph is λ' -connected for $\lambda' \leq \lambda/\log n$, then when sampling the edges with probability at most $1/\lambda'$ the graph is connected with probability at most $3/4$. The theorem follows by a simple application of Chernoff bound. \square

With a slight modification, the algorithm from the above lemma can also be used to obtain an $O(\log n)$ -approximation on the size of the minimum cut λ in G , in $\tilde{O}((\lambda \log^2 n)^{D(D+1)/2})$ rounds w.h.p.

Corollary 7.4. *There is a randomized distributed algorithm, that, given an unweighted n -vertex graph $G = (V, E)$ of diameter D , computes an estimate $\tilde{\lambda}$ on the value λ of the global minimum cut in G , such that $\tilde{\lambda} \in [\lambda, \lambda \cdot O(\log n)]$, in $\tilde{O}((\lambda \log^2 n)^{D(D+1)/2})$ rounds. Both the correctness and the round complexity of the algorithm hold with high probability.*

Proof: The algorithm considers the values $1, 2, 4, \dots$ of λ' one by one. For each such value, it applies the algorithm for λ' -edge connectivity verification, until the first value λ' is encountered on which the verification algorithm returns “No”. The algorithm then terminates and returns this value of λ' . \square

Separation between MST and Approximate Minimum Cut. In the distributed graph theory literature, the problems of approximating the global minimum cut of a graph, and of computing an MST are considered to be more or less “equivalent” in terms of their round complexities in general graphs. In fact, the classical algorithms for minimum cut are based on repeated application of MST computation. As we will show, this is no longer the case when we consider moderately highly connected low-diameter graphs. In order to illustrate this gap, we compare the round complexities

of computing an MST, and of approximating the value of the global minimum cut in k edge-connected graphs of diameter 4. Lotker, Pat-Shamir and Peleg [LPP06] showed that computing an MST in an n -vertex graphs of diameter 4 may require $\Omega((n/\log n)^{1/3})$ rounds. Although their construction is a 2-edge connected graph, we show that a slight modification of their construction gives a k -edge connected for any $k = O(n^{1/4})$. We prove the following theorem.

Theorem 7.5 (MST Lower Bound in k -Connected Graphs). *For every large enough integer n and an integer $k = O(n^{1/4})$, there exists an n -vertex k -edge connected graph of diameter 4, for which computing an MST requires $\tilde{\Omega}((n/k)^{1/3})$ rounds.*

Proof: Our starting point is a graph F_m , that was used in the lower bound proof of [LPP06]. The graph consists of a root vertex c , and a collection $U = \{u_1, \dots, u_m\}$ of additional vertices; we denote $s = u_1$ and $r = u_m$. Every vertex u_i is connected to the root vertex c with an edge. Additionally, the graph contains a collection $\mathcal{P} = \{P_1, \dots, P_{m^2}\}$ of m^2 disjoint paths of length m each. For all $1 \leq j \leq m^2$, we denote by v_i^j the i th vertex on path P_j . For all $1 \leq i \leq m$, we connect the vertex u_i to all vertices $v_i^1, \dots, v_i^{m^2}$.

Next, we modify the graph F_m to make it k -edge connected; the resulting graph is denoted by $F_{m,k}$. In order to obtain the graph $F_{m,k}$, we start from the graph F_m . For all $1 \leq j \leq m^2$ and $1 \leq i \leq m$, we replace the vertex v_i^j with a k -clique $V_{j,i}$. We connect the vertex u_i to every vertex of $V_{j,i}$. For all $1 \leq j \leq m^2$ and $1 \leq i < m$, we add an arbitrary perfect matching between the vertices of $V_{j,i}$ and the vertices of $V_{j,i+1}$; formally, if we denote the vertices of $V_{j,i}$ by $v_{j,i,1}, \dots, v_{j,i,k}$, then we add the edges between $(v_{j,i,\ell})$ and $(v_{j,i+1,\ell})$ for every $1 \leq j \leq m^2$, $1 \leq i \leq m-1$, and $\ell \in \{1, \dots, k\}$ (see Figure 6 for an illustration).

For all $1 \leq i \leq m$, we let S_i be the star graph, that is a sub-graph of the resulting graph $F_{m,k}$, induced by the vertex u_i , and all vertices in sets $V_{j,i}$, for $1 \leq j \leq m^2$.

We set $m = \lceil (n/k)^{1/3} \rceil$, so graph $F_{m,k}$ has $\Theta(n)$ vertices and diameter 4. We claim that graph $F_{m,k}$ is k -edge connected. Indeed, let (X, Y) be any partition of the vertices of $F_{m,k}$ into two subsets. Assume for contradiction that $|E(X, Y)| < k$. Notice first that for all $1 \leq i < i' \leq m$, there are at least k edge-disjoint paths in graph $F_{m,k}$ connecting u_i to $u_{i'}$. Therefore, all vertices u_1, \dots, u_m must lie on the same side of the cut. Assume w.l.o.g. that it is X . It is then easy to verify that, since $m \geq k$ (as $k = O(n^{1/4})$), vertex c must also lie in X . Consider now some set $V_{j,i}$ of vertices, for some $1 \leq j \leq m^2$ and $1 \leq i \leq m$. Every vertex of $V_{j,i}$ is connected by an edge to the vertex u_i . Therefore, not all vertices of $V_{j,i}$ lie in Y . Moreover, for any partition of the vertices of $V_{j,i}$ into two subsets, at least $k-1$ edges must connect the two subsets (as every pair of vertices in a k -clique has $(k-1)$ edge-disjoint paths connecting them). Therefore, if Y contains any vertex of $V_{j,i}$, then $|E(X, Y)| \geq k$ must hold (at least $k-1$ edges must connect vertices of $V_{j,i}$ lying on different sides of the cut, and additionally every vertex of $V_{j,i} \cap Y$ is connected to u_i .) Since $Y \neq \emptyset$, it must contain a vertex from some set $V_{j,i}$, and so $|E(X, Y)| \geq k$ must hold, a contradiction. We conclude that $F_{m,k}$ is k -edge connected.

We next turn to prove a lower bound on the number of rounds for computing an MST in the graph $F_{m,k}$. The proof follows that of [LPP06] almost exactly; we provide it here for completeness. The key idea in the proof of [LPP06] is to consider the *mailing problem*: given the graph $F_{m,k}$, the source vertex $s = u_1$ is required to send an input set X of m^2 bits to the destination vertex $r = u_m$. We adapt the argument of [LPP06] to show that this requires $\tilde{\Omega}((n/k)^{1/3})$ rounds in $F_{m,k}$. Then,

we deduce a lower bound on computing an MST in $F_{m,k}$, using the reduction provided in [LPP06].

Given a graph G , a sender vertex s and a receiver vertex r , together with an input b -bit string $X = x_1, \dots, x_b$, we denote by $\text{mail}(G, s, r, X)$ the mailing problem of sending the string X from s to r . We denote by $\text{Mail}(G, s, r, b)$ the collection of all problems $\text{mail}(G, s, r, X)$, where X is a string of length b . Given an algorithm A , we denote by $T_A(G, s, r, X)$ the number of rounds the algorithm takes to solve problem $\text{mail}(G, s, r, X)$, and we denote by $T_A^b(G, s, r)$ the maximum, over all b -bit strings X , of $T_A(G, s, r, X)$.

Lower Bound for the Mailing Problem.

Claim 7.6. *For any deterministic algorithm A for the mailing problem in the CONGEST model, and any $m \geq 2$, $T_A^{m^2}(F_{m,k}, s, r) = \Omega(m/\sqrt{\log n})$.*

Proof: For every $1 \leq i \leq m$, we define a graph Z_i , called *the i th tail of the graph $F_{m,k}$* . Graph Z_i is the subgraph of $F_{m,k}$ induced by the nodes of $\{V_{j,\ell} \mid 1 \leq j \leq m^2, i+1 \leq \ell \leq m\} \cup \{u_\ell \mid i+1 \leq \ell \leq m\} \cup \{c\}$. We let the 0^{th} tail Z_0 be the subgraph of $F_{m,k}$ induced by $V(F_{m,k}) \setminus \{s\}$.

We now fix a deterministic algorithm A . Let ϕ_X denote the execution of A on an m^2 -bit input X in the graph $F_{m,k}$ with sender s and receiver r . Let $C_t(X)$ denote the vector of states of the nodes in the tail graph Z_t at the end of round t in the execution ϕ_X ; we refer to $C_t(X)$ as *the configuration of Z_t on X in round t* .

Define $\mathcal{C}_t = \{C_t(X) \mid X \text{ is an } m^2\text{-bit string}\}$ and let $\rho_t = |\mathcal{C}_t|$ be the number of distinct reachable configurations of Z_t in round t .

Claim 7.7. *For all $0 \leq t < m$, $\rho_t \leq 2^{t(t+1)B/2}$, where $B = O(\log n)$ is the bandwidth of each edge in the CONGEST model.*

Proof: Observe first that for $t = 0$, since the input string is known only to the sender s , all other nodes are in their initial states and thus $\rho_0 = 1$.

Next, we show that for all $t > 0$, $\rho_{t+1} \leq \rho_t \cdot 2^{B \cdot t}$. Indeed, consider some $t > 0$, and a configuration $\hat{C} \in \mathcal{C}_t$. Recall that the tail set $V(Z_{t+1})$ is connected to the remainder of the graph by two sets of edges: (i) edges connecting cliques $V_{t,j}$ and $V_{t+1,j}$ for every $1 \leq j \leq m^2$ – we call them type-1 edges; and (ii) edges (u_ℓ, c) for $1 \leq \ell \leq t$ – we call them type-2 edges. Clearly, the number of type-2 edges is t .

We now count the number of different configurations in \mathcal{C}_{t+1} that may arise from the single configuration $\hat{C} \in \mathcal{C}_t$.

The key observation is that, since the state of each node in Z_t is determined by \hat{C} , the messages sent from the nodes of Z_t to the nodes of Z_{t+1} are fully determined by \hat{C} . In particular, all messages sent via type-1 edges, and via edges internal to Z_{t+1} are completely determined by \hat{C} . The only additional messages are those sent along the t type-2 edges. Since each such edge may carry at most B bits, the total number of distinct messages sent along such edges is bounded by 2^{Bt} . Therefore, at most 2^{Bt} different configuration in \mathcal{C}_{t+1} may arise from a single configuration in \mathcal{C}_t , and so $\rho_{t+1} \leq 2^{Bt} \cdot \rho_t$.

We conclude that for all $t \geq 0$, $\rho_t \leq 2^B \cdot 2^{2B} \dots 2^{(t-1)B} \leq 2^{t(t+1)B/2}$. □

Let $R = T_A^{m^2}(F_{m,k}, s, r)$; our goal is to show that $R = \Omega(m/\sqrt{B})$. If $R \geq m$, then we are done, so assume that $R < m$. Then there must be at least 2^{m^2} possible different states for the receiver r at round R , so $\rho_R \geq 2^{m^2}$ must hold. Since we have assumed that $R < m$, we get that $2^{BR(R+1)/2} \geq 2^{m^2}$ must hold, that is $R = \Omega(m/\sqrt{B})$ as required. \square

Extension to randomized algorithms. Using standard techniques, one can show that all Las-Vegas algorithms for the mailing problem admit the same asymptotic lower bounds as deterministic algorithms. The proof is based on fixing a deterministic distributed mailing algorithm A and establishing a slightly stronger claim.

Claim 7.8. *For every $m \geq 2$ and for at least half of the possible m^2 -bit input string X of the mailing problem $T_A(F_{m,k}, s, r, X) \geq \alpha m/\sqrt{B}$ for some constant $\alpha > 0$ and $B = O(\log n)$.*

To see this simply define τ_{mid} to be the minimum integer such that $T_A(F_{m,k}, s, r, X) \leq \tau_{mid}$ for at least half of the possible input string. We then have that $2^{B \cdot \tau_{mid} \cdot (\tau_{mid}+1)/2} \geq \rho_{\tau_{mid}} \geq 2^{m^2-1}$ and so $\tau_{mid} = \alpha m/\sqrt{B}$. Since the algorithm takes at least τ_{mid} rounds on half of the inputs, its expected running time over the uniform distribution of all instances in $\text{mail}(F_{m,k}, s, r, X)$ is $\Omega(\tau_{mid})$. The randomized round complexity follows by applying the Yao principle.

Reduction to MST. We follow the exact same scheme of [LPP06]. We start with the unweighted base graph $F_{m,k}$, and define a family of weighted graphs $\mathcal{F}_{m,k}$ such that, if the mailing problem requires $\Omega(t)$ rounds on $F_{m,k}$, then algorithm for computing MST requires at least $\Omega(t)$ rounds on some graph in $\mathcal{F}_{m,k}$.

The edge weights of the graphs in $\mathcal{F}_{m,k}$ are set as follows. All edge weights, except for the edges that belong to the stars S_1, \dots, S_m , are set to 0. The edges of S_m have weight 1, and the edges of the stars S_2, \dots, S_{m-1} have weight 10. Consider now the star S_1 . For all $1 \leq j \leq m^2$, let v^j be an arbitrary distinguished vertex from the clique $V_{j,1}$. Let E_1 be the set of all edges of S_1 that connect u_1 to the distinguished vertices v^1, \dots, v^{m^2} , and let E_2 contain the remaining edges of S_1 . We set the weight of every edge in E_2 to 10. Lastly, every edge in E_1 is given a weight of either 0 or 2. Specifically, for every binary string X of length m^2 , we define a graph $F(X) \in \mathcal{F}_{m,k}$, by appropriately setting the weights of the edges in E_1 : for all $1 \leq j \leq m^2$, if the j th bit of X is 0, then we set the weight of the edge (u_1, v^j) to be 0, and otherwise we set it to 2.

Consider now a minimum spanning tree in a graph $F(X)$. For each $1 \leq j \leq m^2$, we can use the 0-weight edges to connect the set $\bigcup_{1 \leq i \leq m} V_{j,i}$ of vertices to each other, obtaining a connected component C_j . Similarly, we can use the 0-weight edges to connect the vertices u_1, \dots, u_m to the vertex c , obtaining a connected component C_0 . For each $1 \leq j \leq m^2$, we now need to connect C_j to C_0 . If the j th bit of X is 0, then the cheapest way to do so is to employ the edge (u_1, v^j) . Otherwise, the cheapest way to connect C_j to C_0 is to use one of the edges of S_m that is incident to a vertex of C_j , whose weight is 1.

Therefore, by solving the MST problem, the endpoint r learns the m^2 -bit input of s . \square

By combining this lower bound with the upper bound of Theorem 7.3, we have:

Corollary 7.9 (Separation between Distributed Min-Cut and MST). *In every n -vertex graph of diameter 4, the approximate verification of the k -edge connectivity of the graph can be done in*

$\tilde{O}(k^{10})$ rounds. In contrast the computation of MST on 4-diameter graphs requires $\tilde{\Omega}((n/k)^{1/3})$ on a k -edge connected subgraph. Thus for $k = o(n^{1/32})$, approximate verification of the k -edge connectivity is strictly faster than computing an MST.

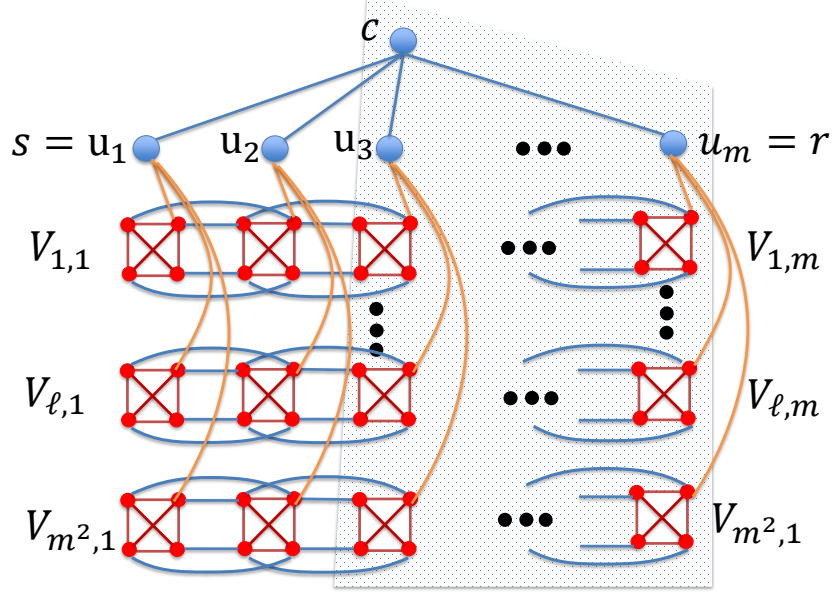


Figure 6: Illustration of the graph $F_{m,k}$, obtained by adapting of lower-bound graph F_m from [LPP06]. Every vertex u_i is connected to all clique vertices in $V_{i,j}$ for every $j \in \{1, \dots, m^2\}$. For clarity of presentation, the figure shows only one edge to a particular clique member. The nodes in the shaded area are the tail sets Z_2 .

7.2 Improved Low-Congestion Shortcuts with Applications

Low-congestion shortcuts, introduced by Ghaffari and Haeupler [GH16b], is a basic communication backbone that is used in algorithms for several optimization problems in the CONGEST model. We start by providing a formal definition, and then show a distributed computation of shortcuts of improved quality, that leverages the graph connectivity.

Definition 4 (Low-Congestion Shortcuts, [GH16b]). *Given a graph $G = (V, E)$, and a partition S_1, \dots, S_N of V into disjoint subsets, such that for all $1 \leq i \leq N$, graph $G[S_i]$ is connected, an (α, β) -shortcut is a collection $\{H_1, \dots, H_N\}$ of subgraphs of G , that satisfy the following:*

- (1) for each edge $e \in E$, there are at most α subgraphs $G[S_i] \cup H_i$ containing e ; and
- (2) the diameter of each subgraph $G[S_i] \cup H_i$ is at most β .

Ghaffari and Haeupler [GH16b] showed that the quality of several algorithms depends on the sum of α (i.e., congestion) and β (i.e., the dilation). The quantity of $\alpha + \beta$ is usually referred to as the *quality* of the shortcuts. As observed by [GH16b] for every n -vertex graph G and any collection of vertex-disjoint subsets S_1, \dots, S_N , there exist (α, β) shortcuts for with $\alpha + \beta = O(D + \sqrt{n})$. This is also tight due to Das-Sarma et al. [SHK⁺12]. Shortcuts with improved quality are known to exist for planar graphs [GH16b], graphs with bounded pathwidth or treewidth [HIZ16], graphs with excluded minor [HLZ18] and graphs with small mixing time [GKS17a, GL18].

Our key result is in providing a nearly optimal construction for low-congestion shortcuts in highly connected graphs of constant diameter. This immediately leads to improvements in a number of network optimization tasks. The input to the shortcut algorithm is a partition $\{S_1, \dots, S_N\}$ of $V(G)$, given in a distributed manner, that is, each vertex S_i knows the ID of the set S_i to which it belongs, where the ID is the largest vertex ID in S_i . At the end of the algorithm, each vertex $v \in S_i$ knows all its neighbors in the augmented subgraph $G[S_i] \cup H_i$.

Throughout we assume that we are given a k -edge connected graph and that all nodes know k (or even a logarithmic approximation $k' \in [k/\log n, k]$). Alternatively, the nodes can first compute a $O(\log n)$ -approximation of the size of the minimum cut within $\tilde{O}((k \log^2 n)^{D(D+1)/2})$ rounds w.h.p. using a Cor. 7.4.

Theorem 7.10. *[Improved Shortcuts in Highly Connected Graphs] There is a randomized algorithm that, for a sufficiently large n , given any k -connected n -vertex graph G of diameter $D = O(\log n / \log \log n)$, together with a partition $\{S_1, \dots, S_N\}$ of $V(G)$, such that for all $1 \leq i \leq N$, $G[V_i]$ is a connected graph, computes (α, β) shortcuts, with*

$$\alpha + \beta = \tilde{O}(\min\{\sqrt{n/k} + n^{D/(2D+1)}\}, n/k),$$

in $\tilde{O}(\alpha + \beta)$ rounds. Both the round complexity and the correctness hold with high probability.

In the remainder of this subsection, we prove Theorem 7.10.

Warmup: Shortcuts with $\alpha = 2$ and $\beta = O(n/k)$. We first consider the simpler case of obtaining nearly-edge disjoint shortcuts of diameter $O(n/k)$. Given the input collection S_1, \dots, S_N of subsets of $V(G)$, for each $1 \leq i \leq N$, we define the graph H_i as follows: graph H_i contains all vertices of S_i , and all neighbors of vertices of S_i in G . The set of edges of H_i consists of all edges that have one endpoint in S_i and another endpoint outside of S_i . Clearly, we can compute all such graphs H_i in a single communication round. We now turn to analyze the quality of the resulting shortcuts. For each $1 \leq i \leq N$, we denote by $G_i = G[S_i] \cup H_i$.

Since the endpoints of each edge (u, v) appear in the most two subsets S_i , it is easy to see that every edge of G may belong to at most two graphs G_i . Next, we show that for each $1 \leq i \leq N$, the diameter of G_i is bounded by $12n/k$. Indeed, let u, v be any pair of vertices in G_i , and let P be the shortest path connecting u to v in G_i . Assume for contradiction, that P contains at least $12n/k$ vertices. Since every vertex of G_i either belongs to S_i , or has a neighbor in S_i , there is a subset $S' \subseteq V(P)$ of at least $6n/k$ vertices that belong to S_i . Moreover, there is a subset $S'' \subseteq S'$ of at least $2n/k$ vertices, where for all $x, y \in S''$, the distance from x to y in G_i is at least 3. Since the path P is a shortest u - v path in G_i , and since the neighbors of all vertices in S_i lie in G_i , for every

pair $x, y \in S''$ of vertices, the set $\Gamma_G(x)$ of neighbors of x in G , and the set $\Gamma_G(y)$ of neighbors of y in G must be disjoint. Since G is k -edge connected, for each $x \in S''$, $|\Gamma_G(x)| \geq k$. Therefore:

$$|\bigcup_{x \in S''} \Gamma_G(x)| = \sum_{x \in S''} |\Gamma_G(x)| \geq |S''| \cdot k > n,$$

a contradiction. We conclude that the diameter of each graph G_i is at most $O(n/k)$.

Improved Shortcuts for Smaller Connectivity. We now complete the proof of Theorem 7.10. Assume first that $k \geq n^{(D+1)/(2D+1)}$. In this case, $n/k \leq n^{D/(2D+1)}$, and from the above discussion, the claimed bounds on $\alpha + \beta$, and on the number of rounds hold. Therefore, we assume from now on that $k \leq n^{(D+1)/(2D+1)}$. The algorithm distinguishes between two cases, depending on the value of the edge connectivity k . Define

$$T_{small} = \begin{cases} \sqrt{n/k}, & \text{if } k \leq n^{1/(2D+1)}/(101 \ln n) \\ n^{D/(2D+1)}, & \text{if } k \in (n^{1/(2D+1)}/(101 \ln n), n^{(D+1)/(2D+1)}]. \end{cases}$$

At a high level, for every set S_i of cardinality at most T_{small} , the algorithm defines $H_i = \emptyset$. For the remaining large sets S_i , of cardinalities at least T_{small} , the algorithm uses Claim 7.2 with congestion bound $\eta = \max\{1, 101 \ln n \cdot k/n^{1/(2D+1)}\}$ in order to construct k subgraphs G_1, \dots, G_k of G , of diameter at most $(101k \ln n/\eta)^D$ each, that cause total congestion at most $O(\eta \log n)$, in $O(D + \eta \log n)$ rounds.

The remaining $O(n/T_{small})$ subsets S_i of cardinality at least T_{small} are handled as follows: each set S_i chooses an index $j \in \{1, \dots, k\}$ uniformly at random, and then sets $H_i = G_j$. We next describe the implementation details and then analyze the bounds obtained.

At the beginning of the algorithm, every vertex v learns the identities of the sets S_j of each of its neighbors. It then checks whether it is a vertex with largest ID in its subset S_i . If so, then v initiates a construction of a BFS tree in $G[S_i]$, that continues up to depth T_{small} . Once the BFS tree reaches depth T_{small} , every vertex x of S_i that was reached in this last step checks whether each of its neighbors that lies in S_i has been explored by the BFS. If so, then S_i is a small set; otherwise it is a large set. This information can be propagated back to all vertices that were explored by the BFS⁵. If S_i is a small set, then, since we set $H_i = \emptyset$, nothing else needs to be done.

We also run the algorithm from Claim 7.2 to compute a collection of spanning subgraphs G_1, \dots, G_k , of diameter at most $(101k \ln n/\eta)^D$ each, that cause total congestion at most $O(\eta \log n)$, in $O(D + \eta \log n)$ rounds. Next, each large subset S_i needs to select a subgraph $H_i \in \{G_1, \dots, G_k\}$. We need to ensure that all vertices in S_i make the same random decision for the selection of a graph G_j , and we will pick the graph G_j in an almost uniform manner. In order to do so, we use bounded-independence hash functions, see Definition 6. All nodes in the graph will share a short random seed of $\tilde{O}(1)$ bits, that encodes a $\log n$ -wise independent hash function $h : \{0, 1\}^{c \log n} \rightarrow \{0, 1\}^{\log k}$. Specifically, by Lemma 7.24, there is a family \mathcal{H} of $O(\log n)$ -wise independent hash functions $h : \{0, 1\}^{c \log n} \rightarrow \{0, 1\}^{\log k}$ such that choosing a random function from \mathcal{H} can be done with a

⁵If a vertex did not receive a message that it belongs to a small set within $O(T_{small})$ rounds, it knows that it is in a large set.

seed length of size $O(\log^2 n)$. This $O(\log^2 n)$ -length random seed is shared by all nodes within $O(D + \log^2 n)$ rounds. Let $h \in \mathcal{H}$ be the random function chosen by the shared random seed.

Then, for each $1 \leq i \leq N$, we let $H_i = G_j$, where $j = h(ID(S_i))$. By exchanging messages with its neighbors, each node in S_i can learn all its neighbors in $G[S_i] \cup H_i$. This completes the description of the algorithm. We next analyze the correctness and the round complexity.

We first consider the case where $k \leq n^{1/(2D+1)}/(101 \ln n)$, and thus $T_{small} = \sqrt{n/k}$ and the congestion bound is $\eta = 1$. For every set S_i of size at most T_{small} , the algorithm sets $H_i = G[S_i]$. The remaining sets S_i , whose number is bounded by $n/T_{small} = \sqrt{kn}$, are randomly split among the k subgraphs G_1, \dots, G_k of diameter $(101k \ln n)^D$ each, that cause edge-congestion $O(\log n)$. Using the Chernoff bound for bounded independence (see Theorem 7.25), we get that w.h.p. the edge congestion of the shortcut is bounded by $\alpha \leq O(\log^2 n \cdot \sqrt{n/k})$. In addition, the diameter of the shortcuts is at most $\beta \leq \sqrt{n/k} + (101k \ln n)^D = O(\sqrt{n/k} + n^{D/(2D+1)})$.

Next consider the case where $k \in [n^{1/(2D+1)}/(101 \ln n), n^{(D+1)/(2D+1)}]$, and thus $T_{small} = n^{D/(2D+1)}$ and the congestion bound $\eta = 101 \ln n \cdot k/n^{1/(2D+1)}$. Note for $D \leq c \cdot \ln n / \log \log n$ for some large constant $c \geq 1$, it holds that $n^{1/(2D+1)} \geq 101 \ln^2 n$ and therefore $\eta \leq k/\ln n$.

Finally, we describe a construction of BFS trees T'_i in each $G[S_i] \cup H_i$ in parallel. This will make sure that the low-depth trees T'_i that span S_i are marked in the sense that each vertex knows its incident edges in each T'_i . It is sufficient to consider the case of large sets as for the small sets these trees were already computed. Fix one such set S_i and let v be the vertex of large ID. We will build a BFS rooted at v in $G[S_i] \cup H_i$ layer by layer, where in every step $j \geq 1$, we assume that we already have computed the first j layers of the tree and that all vertices in layer j know their neighbors in $G[S_i] \cup H_i$. For the base case of $j = 1$, the root v knows its edges in all the G_ℓ subgraphs and using the seed it can compute the index $\ell = h(ID(S_i))$. In the $j^{th} \geq 1$ step, the nodes of layer $j - 1$ send a BFS message that contains the ID of S_i (i.e., the ID of the root v) to all their neighbors in $G[S_i] \cup H_i$. Each vertex u that receives such BFS messages from the tree of S_i can compute which of its incident edges are in $G[S_i] \cup H_i$. This is because in the output format of Claim 7.2 each vertex knows its edges in the subgraphs G_1, \dots, G_k and using the shared seed and the ID of S_i it can compute the subgraph G_ℓ such that $\ell = h(ID(S_i))$.

We now analyze the algorithm and first consider the quality of the shortcuts. The algorithm computes k subgraphs G_1, \dots, G_k of diameter $(101k \ln n/\eta)^D$ and congestion $O(\eta \log n)$. Using the Chernoff bound from Theorem 7.25, the edge-congestion of the shortcuts is bounded by $\alpha = O(\eta \cdot \log^2 n \cdot n/(T_{small} \cdot k)) = \tilde{O}(n^{D/(2D+1)})$. In addition, the diameter is bounded by $\beta \leq T_{small} + (101k \ln n/\eta)^D = \tilde{O}(n^{D/(2D+1)})$, as desired. Finally we bound the number of rounds. Handling the small sets take $O(\sqrt{n/k})$ rounds as we build vertex-disjoint BFS trees up to depth $\sqrt{n/k}$. To handle the large sets, the algorithm applies Claim 7.2 with congestion bound η , since it does not require the claim to output trees but rather subgraphs, this takes $O(D + \eta \log n)$ rounds w.h.p., where the high probability is on the quality of the output subgraphs and not on the running time. Sharing the random seed of length $O(\log^2 n)$ takes $O(D + \log^2 n)$. Finally, computing the BFS trees in each $G[S_i] \cup H_i$ takes $\tilde{O}(\alpha + \beta)$ rounds w.h.p. This completes the proof of Theorem 7.10.

7.2.1 Applications of the Improved Shortcuts

Using the improved shortcuts, we obtain a number of immediate improvements for various network optimization tasks.

Fact 1 ([Gha17]). *Let \mathcal{G} be a graph family such that for each graph $G \in \mathcal{G}$ and any partition of G into vertex-disjoint connected subsets S_1, \dots, S_N , one can find an α congestion β -dilation shortcuts such that $\max\{\alpha, \beta\} \leq K$ and this shortcuts can be computed in $\tilde{O}(K)$ rounds. Then:*

- [Theorem 6.1.2]: *there is a randomized distributed MST algorithm that computes an MST in $\tilde{O}(K)$ rounds, with high probability, in any graph from the family \mathcal{G} .*
- [Theorem 7.6.1]: *there is a randomized distributed algorithm that computes a $(1 + \epsilon)$ approximation of the minimum cut in $\tilde{O}(K)$ rounds, with high probability, in any graph from the family \mathcal{G} .*

Combining with our improved shortcuts for k -edge connected graphs, we get:

Corollary 7.11 (Improved Distributed MST and $(1 + \epsilon)$ Approx. Minimum Cut). *There is a randomized distributed algorithm, that, given a k -edge connected n -vertex graph of diameter D , computes an MST and $(1 + \epsilon)$ approximation of the minimum cut in $\tilde{O}(\min\{\sqrt{n/k} + n^{D/(2D+1)}, n/k\})$ rounds.*

For k -connected graphs with constant diameter $D \geq 5$, this improves upon the state of the art of $O(\sqrt{n})$ -rounds for the MST problem. For the $(1 + \epsilon)$ approximate minimum cut problem, independently to our work, it is been briefly mentioned in [GNT20] (see footnote 4), that it is plausible to get an $\tilde{O}(\sqrt{n/k} + D)$ -round solution. The formal proof of this fact is not yet provided in [GNT20]. Furthermore, we stress that highly-connected graphs of small diameter might still have very poor expansion, and therefore they are not captured by the improved algorithms for fast mixing graphs [GKS17b, GL18].

An additional immediate corollary of improved shortcuts is for computing an approximate SSSP. Haeupler and Li [HL18] provided improved algorithms for several shortest-path problems whose bounds depend on the quality of shortcuts. By plugging the bounds of Theorem 7.10 into Corollaries 2,3 in [HL18] we get:

Corollary 7.12 (Improved Distributed SSSP Tree Algorithms). *There are randomized algorithms, that, given a k -edge connected n -vertex weighted graph with polynomial edge weights of diameter D perform the following tasks: (1) compute a spanning tree that approximates distances to a given source vertex to within factor $(\log n)^{O(1/\epsilon)}$, in $\tilde{O}(\min\{\sqrt{n/k} + n^{D/(2D+1)}, n/k\}) \cdot n^\epsilon$ rounds for any constant ϵ ; and (2) compute a spanning tree that approximates distances to a given source vertex within factor $2^{O(\sqrt{\log n})}$, in $\tilde{O}(\min\{\sqrt{n/k} + n^{D/(2D+1)}, n/k\}) \cdot 2^{O(\sqrt{\log n})}$ rounds.*

Finally, Dory and Ghaffari [DG19] recently studied the distributed approximation of minimum weight two-edge connected subgraphs (2-EECS). By plugging our shortcut bounds into Theorem 1.2 of [DG19], we get:

Corollary 7.13 (Improved Approximation of 2-EECS). *There is an algorithm, that, given a k -edge connected n -vertex weighted graph of (unweighted) diameter D , computes an $O(\log n)$ -approximation of the weighted 2-ECSS in $\tilde{O}(\min\{\sqrt{n/k} + n^{D/(2D+1)}, n/k\})$ rounds, with high probability.*

7.2.2 Lower Bound of Shortcuts

Theorem 7.14 (Lower Bounds for Shortcuts in Highly Connected Graphs). *For every integer k and sufficiently large integer n , there exists a k -edge connected n -vertex graph G with diameter $2D = O(\log_k n)$ and a partition of its vertices into subsets S_1, \dots, S_N , each inducing a connected subgraph of G , such that regardless of how the shortcut subgraphs H_i are chosen, if each $G[S_i] \cup H_i$ has diameter at most $D' < \min\{\sqrt{n/k} + (n/D)^{D/(2D+1)}, n/k\}$, then there is at least one edge that suffers a congestion of at least D' .*

To show the lower bound argument, we first describe a modification of the lower bound graph construction from Sec. 5. Roughly speaking, the resulting modified graph can be viewed as a combination of the lower bound graph from Das Sarma et al. [SHK⁺12] with the construction of Section 5.

A Useful Modification of the Lower Bound Graph from Sec. 5. We first describe the construction of a lower bound graph $G_{k,\alpha,\eta,D}^*$. For simplicity we denote $G^* = G_{k,\alpha,\eta,D}^*$. The graph G^* is obtained by first taking the graph $G'_{w,D}$ (see the proof of Theorem 1.3 in Section 5) for $w = k/(2D\alpha\eta)$ and adding to it a collection of $q = \lfloor n/(2w^D) \rfloor$ paths $\mathcal{P} = \{P_1, \dots, P_q\}$.

Recall that $G'_{w,D}$ is the graph obtained from $G_{w,D}$ by first replacing each vertex v_i with a set $X_i = \{x_i^1, x_i^2, \dots, x_i^k\}$ of k vertices that form a clique, and then replacing, for each $1 \leq i < N$, the k red edges connecting v_i to v_{i+1} by the perfect matching $\{(x_i^t, x_{i+1}^t)\}_{1 \leq t \leq k}$ between vertices of X_i and vertices of X_{i+1} , and finally, replacing each blue edge (v_i, v_j) by a edge (x_i^1, x_j^1) . We denote by E' the set of edges that replace the blue edges of $G_{w,D}$.

Recall that L is the set of leaf nodes of $G_{w,D}$. We define $L^* \subseteq V(G^*) = \{x_i^1 \mid v_i \in L\}$. So $|L^*| = w^D$. Let $s = x_1^1$, and $t = x_{N-D}^1$ be vertices of L^* that have lowest and largest index, respectively. Then, the vertices of paths of \mathcal{P} are connected to the nodes of L^* as follows: for each $1 \leq i \leq |L^*|$ and for each $j \in \{1, \dots, q\}$, there is an edge connecting each node of X_{r_i} (where r_i is the i th smallest index of vertices of L) to the i th node of each path P_j . See Figure 7 for an illustration.

Claim 7.15. *Any set of k/α paths connecting s to t in G^* that causes edge-congestion at most η must contain at least one path of length at least $|L^*|/2$.*

Proof: We use similar arguments in the proof of Theorem 1.3. By the definition of G^* , $V(G^*) = \left(\bigcup_{j=1}^N V(P_j)\right) \cup V(G'_{w,D})$. For each i such that the node $v_i \in L$, we define Q_i to be the set of vertices of $\bigcup_{1 \leq j \leq q} V(P_j)$ that is connected to x_i^1 , and we let $W_i = \bigcup_{1 \leq t \leq i} (X_t \cup Q_t)$ and $\overline{W}_i = V(G^*) \setminus W_i$.

It can be shown (similar to Corollary 5.3) that, for each i such that $v_i \in L$, $|E_{G^*}(W_i, \overline{W}_i) \cap E'| \leq Dw$. Since the k/α paths between s and t in G^* cause edge-congestion η , at most $Dw\eta$ of them may contain edges in $E_{G^*}(W_i, \overline{W}_i) \cap E'$. So each of the remaining $\frac{k}{\alpha} - Dw\eta \geq \frac{k}{2\alpha}$ paths either contains

an edge from $\left(\bigcup_{1 \leq j \leq q} E(P_j)\right)$ that crosses the cut $(W_i, \overline{W_i})$, or contains an edge of the perfect matching $\{(x_i^t, x_{i+1}^t)\}_{1 \leq t \leq k}$ between vertices of X_i and vertices of X_{i+1} . Therefore, the sum of lengths of the k/α paths of is at least $|L^*| \cdot \frac{k}{2\alpha}$, and therefore at least one path must have length at least $|L^*|/2$. \square

Proof of Theorem 7.14

The proof is divided into three parts. First, we show lower bound of $\sqrt{n/k}$. Then, we show a lower bound of $(n/D)^{D/(2D+1)}$ for intermediate values of the edge connectivity k . Finally, we show a lower bound of n/k provided that k is sufficiently large.

Lower Bound of $\sqrt{n/k}$. We first show that there exists a k -edge connected n -vertex graph with diameter $D = O(\log_k n)$ as well as vertex-disjoint subsets S_1, \dots, S_q , such that in every shortcut for these subsets, either the congestion is $\Omega(\sqrt{n/k})$, or that the diameter is at least $\Omega(\sqrt{n/k})$. The lower bound graph is given by $G^* = G_{k,\alpha,\eta,D}^*$ where w and D are chosen such that $w = k/(2D\alpha \cdot \eta)$ for $\alpha = 2$ and $\eta = \log n$ and $w^D = \sqrt{n/k}$, thus $D = O(\log_k n)$. Recall that L is the set of leaf nodes in $G_{w,D}$, and $|L| = w^D$. Let $S_i = V(P_i)$ for every $i \in \{1, \dots, q\}$ (recall that $q = \lfloor n/(2w^D) \rfloor = \Theta(\sqrt{kn})$). Assume that there are shortcuts for the sets $\{S_i\}_{1 \leq i \leq q}$ with diameter D' such that the total congestion is at most $K < \sqrt{n/k}$. We will show that these shortcuts give a collection of q paths $\mathcal{P} = \{P'_1, \dots, P'_q\}$ from s to t of length $D' + 2$ each and causes edge-congestion at most K . To see this, for each $1 \leq i \leq q$, let u_i, v_i be the endpoints of P_i , we define P'_i to be the concatenation of the $u_i - v_i$ shortest path in $G[S_i] \cup H_i$ and the edges (s, u_i) and (t, v_i) . That is, $P'_i = (s, u_i) \circ \pi(u_i, v_i, G[S_i] \cup H_i) \circ (v_i, t)$ for every $i \in \{1, \dots, q\}$.

We next claim that there exists a subset $\mathcal{P}' \subseteq \mathcal{P}$ of at least $k/2$ paths of total congestion at most η . From Claim 7.15, this implies that one of these paths have length $\Omega(\sqrt{n/k})$ and thus the diameter of at least one of the subgraphs $G[S_i] \cup H_i$ is at least $\Omega(\sqrt{n/k})$ as well. To see this, we sample each P'_i with probability k/q . Thus, in expectation, k paths are sampled with congestion $K \cdot k/2q \leq \sqrt{n/k} \cdot \Theta(k/(\sqrt{kn})) = O(1) \leq \eta$. Therefore such a subset exists and the claim follows.

Lower Bound of $\Omega(n/D)^{D/(2D+1)}$ for $k \in [4D \cdot n^{1/(2D+1)}, (n/D)^{(D+1)/(2D+1)}/10]$. Given an edge connectivity value k , a number of nodes n and a diameter value D , we build the lower bound graph $G^* = G_{k,\alpha,\eta,D}^*$ where $\alpha = 2$ and $\eta = k/(4D \cdot (n/D)^{1/(2D+1)})$. The set of marked leaf nodes L^* contains w^D vertices where $w = k/(2D\alpha \cdot \eta)$, thus $|L^*| = (n/D)^{D/(2D+1)}$. Note that $|L^*| \cdot 2k < n/2$ and therefore by setting the constants carefully, the graph G^* contains n vertices in total. Recall that G^* contains a collection of $q = n/(2L^*)$ paths P_1, \dots, P_q of length $|L^*|$. Let $S_i = V(P_i)$ for every $i \in \{1, \dots, q\}$. Assume that there are shortcuts for the S_i sets such that the total congestion is at most $K = (n/D)^{D/(2D+1)}$ and with diameter D' . As in the previous paragraph, these shortcuts implies a collection of q paths $\mathcal{P} = \{P'_1, \dots, P'_q\}$ from s to t of total congestion K and length at most $D' + 2$.

We next claim that there exists a subset $\mathcal{P}' \subseteq \mathcal{P}$ of at least $k/2$ paths of total congestion η . From Claim 7.15, this implies that one of these paths have length $\Omega(|L^*|)$ and thus the diameter of at least one of the subgraphs $G[S_i] \cup H_i$ is at least $\Omega(|L^*|) = \Omega(n^{D/(2D+1)})$. To see this, we

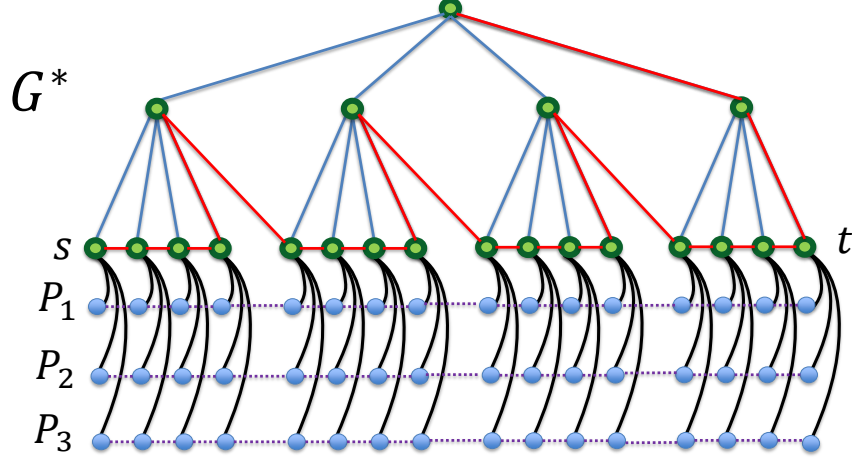


Figure 7: A lower bound graph for low-congestion shortcuts in highly connected graphs.

sample each P'_i with probability k/q . Thus, in expectation, there are k paths and the congestion is $K \cdot k/q \leq (n/D)^{D/(2D+1)} \cdot k/q = \eta/\log n$. Therefore such a subset exists and the claim follows.

Lower Bound of n/k for $k = \Omega((n/D)^{(D+1)/(2D+1)} \cdot \log n)$. Set $\eta = k^{1+1/D}/(12D \cdot n^{1/D})$ and $\alpha = 2$ and let $G^* = G_{k,\alpha,\eta,D}$. Recall that for $w = k/(2D\alpha\eta)$, the number of marked leaf nodes is $|L^*| = w^D = n/(10k)$. Therefore there are at least $q \in [k, 7k]$ paths P_1, \dots, P_q of length $|L^*|$ in G^* .

Assume towards contradiction that there are shortcuts of congestion at most $K \leq n/(10k)$ of length at most $D' \leq (n/10k)$. Hence there are q paths $\mathcal{P} = \{P'_1, \dots, P'_q\}$ from s to t of length at most $D' + 2$ and congestion at most K . We next show that this implies that there is a subset of $k/4$ paths $\mathcal{P}' \subseteq \mathcal{P}$ of with congestion at most η . From Claim 7.15, at least one of these paths have length at least $|L^*|/2 = \Omega(n/k)$.

Sample each path $P_i \in \mathcal{P}$ with probability k/q into \mathcal{P}' . In expectation the number of sampled paths is k and the congestion is $k/q \cdot K \leq n/(2k) \leq \eta/\log n$ by plugging the bound on the value of k . We therefore get that w.h.p. there exists a collection of $k/2$ paths in \mathcal{P} with congestion at most η . From Claim 7.15, at least one of these paths have length at least $|L^*|/2 = \Omega(n/k)$. This completes the proof for Lemma 7.14.

7.3 Improved Bounds for the Information Dissemination Task

In the information dissemination task, we are given a k -edge connected n -vertex graph G of diameter D , with two special nodes s and t . The source s receives as input a sequence of N bits, which it needs to send to t as fast as possible.

Ghaffari and Kuhn [GK13] showed a lower bound of $\Omega(\min\{N/\log^2 n, n/k\})$ rounds for the special case where the diameter D of the graph is logarithmic in n , that is, $D = \Theta(\log n)$.

We consider the setting where the diameter D is sub-logarithmic in n , and provide the first upper and lower bounds for this setting. We start with the following upper bound.

Lemma 7.16 (Upper Bound for Information Dissemination). *There is a randomized algorithm, that, given any k -edge connected n -vertex graph G of diameter D with a source vertex s and a destination vertex t , sends an input sequence of N bits from s to t . The number of rounds is bounded by $\tilde{O}(N^{1-1/(D+1)} + N/k)$ with high probability.*

Proof: We use a parameter $\chi = N^{1/(D+1)}/(101 \ln n)$, and we set $\eta = \max\{1, k/\chi\}$. By applying the algorithm from Claim 7.2 to G , with the congestion bound η , we obtain a collection $\mathcal{T} = \{T_1, \dots, T_k\}$ of k spanning trees, such that, with high probability, all trees have diameter at most $(101 \ln n \cdot k/\eta)^D$, and the total edge congestion due to \mathcal{T} is at most $O(\eta \cdot \log n)$. We partition the input sequence X of bits into k consecutive sub-sequences X_1, \dots, X_k , each of which contains at most $\lceil N/k \rceil$ bits. For each $1 \leq i \leq k$, consider the algorithm A_i , that sends the bits of X_i from s to t along the tree T_i . Notice that, assuming that the algorithm for constructing the trees was successful, algorithm A_i can be implemented in $O(N/k + (101k \ln n/\eta)^D)$ rounds, and every edge is used to send $O(N/k)$ messages. Since the trees in \mathcal{T} cause edge-congestion $O(\eta \log n)$, the total number of messages that are sent via a single edge by all the algorithms A_1, \dots, A_k altogether is at most $O(\eta N \log n/k)$.

We can now use the random delay approach, to send all bits of X from s to t , by combining the algorithms A_1, \dots, A_k . The number of rounds is bounded by $r = \tilde{O}((101k \ln n/\eta)^D + \eta \cdot N/k)$ with high probability.

We now consider two cases. First, if $k \leq \chi$, then $\eta = 1$, and $r = \tilde{O}((101k \ln n)^D + N/k) \leq \tilde{O}(N^{D/(D+1)} + N/k)$. On the other hand, $N/k \geq N/\chi \geq N \cdot (101 \ln n)/N^{1/(D+1)} \geq N^{D/(D+1)} \cdot (101 \ln n)$. Therefore, $r \leq \tilde{O}(N/k)$ holds.

Consider now the second case, where $k > \chi$. In this case, $\eta = k/\chi = 101k \ln n/N^{1/(D+1)}$. We then get that:

$$r = \tilde{O}((101k \ln n/\eta)^D + \eta \cdot N/k) = \tilde{O}(N^{D/(D+1)} + N/\chi) = \tilde{O}(N^{1-1/(D+1)}),$$

as required. \square

We now provide the first lower bound on the round complexity of information dissemination for graphs with sublogarithmic diameter. Unlike [GK13] our lower bound only holds for the weaker setting of store and forward algorithms (in which modification of messages by e.g., network coding is not allowed).

Theorem 7.17 (Lower Bound for Information Dissemination). *For all integers n, N, D and $k \leq n$, there exists a k -edge connected n -vertex graph $G = (V, E)$ of diameter $2D$, and a pair s, t of its*

vertices, such that sending N bits from s to t in a store-and-forward manner requires at least

$$\Omega(\min\{(N/(D \log n))^{1-1/(D+1)}, n/k\} + N/k + D) \text{ rounds.}$$

Proof: We start with the following simple observation.

Observation 7.18. *Let G be a graph of diameter D , such that some vertex s in G has degree at most k , and let t be any vertex at distance at least $D/2$ from s . Then any algorithm for sending $\Omega(N)$ bits from s to t must send at least N/k messages on at least one of the graph edges, therefore requires N/k rounds.*

Proof: Let A be any algorithm for the problem, and consider its execution on a given sequence X of N bits. Assume for contradiction that the number of messages sent on each edge is strictly less than N/k . Then every edge that is incident to s may be used to carry at most $N/k - 1$ bits, and, since the degree of s is k , fewer than N bits are sent from s , a contradiction. \square

We next show a lower bound of $\Omega(\min\{N/(D \log n)^{1-1/(D+1)}, n/k\})$ rounds. To do that, we show that for every $\eta \in [1, k]$, there is a k -edge connected D -diameter graph G_η and $s, t \in V(G_\eta)$ such that if the algorithm sends the N bits from s to t with a total edge congestion at most $\eta \cdot N/k$, then one of the s - t paths used by the algorithm must have length at least $\min\{1/4 \cdot (k/(2\eta D \log n))^D, n/k\}$. The graph G_η is given by taking the lower bound graph of Section 5 (Theorem 1.3) with $\alpha = \log n$ and the congestion bound is η . We then choose s and t as the left-most and right-most leaf nodes.

For every algorithm A for this problem, let $c(A)$ be the maximal number of messages sent through a given edge in G (i.e., there is a graph edge on which the algorithm A passes $c(A)$ messages, and on all other edges at most $c(A)$ messages are sent). By Observation 7.18, $c(A) \geq N/k$. Assume that there exists an algorithm A for which $c(A) = \lfloor \eta \cdot N/k \rfloor$ for some $\eta \in [1, k]$. Let $\mathcal{P} = \{P_1, \dots, P_N\}$ be the s - t paths on which these N bits are sent, and let $d(A) = \max_j |P_j|$ be the length of the longest path in \mathcal{P} . Our goal is to bound $d(A)$ from below.

To do that, we claim, using a probabilistic argument, that \mathcal{P} contains a subset \mathcal{P}' of at least $k/\log n$ paths such that each edge e appears on at most η paths in \mathcal{P}' . To see this, sample each path $P_i \in \mathcal{P}$ with probability $p = k/(N \cdot \log n)$. The expected number of sampled paths is $pN/k = k/\log n$ and the expected congestion is at most $\eta/\log n$ and w.h.p. at most η . Therefore such a collection $\mathcal{P}' \subseteq \mathcal{P}$ exists. By Theorem 1.3 it then holds that one of the s - t paths must have length $d(A) = \min\{1/4 \cdot (k/(2\eta \cdot D \log n))^D, n/k\}$. Therefore the total running time of the algorithm A is at least

$$d(A) + c(A) \geq \min\{1/4 \cdot (k/(2\eta \cdot D \log n))^D, n/k\} + \eta \cdot N/k - 1.$$

First, observe that for every η satisfying that $n/k = O((k/(2\eta \cdot D \log n))^D)$, we get that $d(A) = \Omega(n/k)$, as desired. So from now on assume that $n/k \geq (k/(2\eta \cdot D \log n))^D$ and therefore

$$\eta \geq k^{1+1/D} / (n^{1/D} \cdot 2D \log n). \quad (1)$$

We distinguish between two cases depending on the value of k .

Case 1, $k \geq \frac{n}{(N/2D \log n)^{D/(D+1)}}$: The round complexity is at least

$$\eta N/k \geq k^{1+1/D} / (n^{1/D} \cdot 2D \log n) \cdot N/k = (k/n)^{1/D} \cdot N/(2D \log n) \geq (N/(2D \log n))^{1-1/(D+1)},$$

as desired.

Case 2, $k \leq \frac{n}{(N/2D \log n)^{D/(D+1)}}$: The round complexity is $\Omega((k/(2\eta \cdot D \log n))^D + \eta \cdot N/k)$. Our goal is to find η^* that minimizes this expression subject to the constraint of satisfying Ineq. (1). The minimum value is obtained for setting

$$\eta^* = k/((2D \log n)^{1-1/(D+1)} \cdot N^{1/(D+1)}) .$$

One can verify that Ineq. (1) holds for $k \leq \frac{n}{(N/2D \log n)^{D/(D+1)}}$. Therefore the running time of A is at least $\eta^* \cdot N/k = \Omega(N/(D \log n)^{1-1/(D+1)})$ as desired. □

7.4 Implications to Secure Distributed Computation

A cycle cover of a bridgeless graph G is a collection \mathcal{C} of simple cycles in G , such that each edge $e \in E(G)$ belongs on at least one cycle in \mathcal{C} . Motivated by applications to distributed computation, Parter and Yogev [PY19] introduced the notion of *low-congestion* cycle covers, in which all cycles in \mathcal{C} are required to be both *short* and nearly *edge-disjoint*. Formally, a (d, c) -cycle cover of a graph G is a collection \mathcal{C} of cycles in G , such that each cycle $C \in \mathcal{C}$ has length at most d , and each edge $e \in E(G)$ participates in at least one cycle and at most c cycles of \mathcal{C} . Parter and Yogev [PY19] showed that, using a (d, c) -cycle cover of a graph G , one can compile any r -round distributed algorithm \mathcal{A} into a *resilient* one, while only incurring a multiplicative overhead of $\tilde{O}(d + c)$ in the round complexity. Two types of adversaries were considered in [PY19]: (i) a *Byzantine* adversary, who can corrupt a *single* message in each round; and (ii) an *eavesdropper* adversary, who can listen to *one* of the graph edges of its choice in each round. The common to both of these types of adversaries is that they are restricted to manipulating only a *single* edge of the graph in a given round. This restriction follows from the fact that the cycle cover provides each edge e with only two edge-disjoint paths connecting its endpoints: a direct one using the edge e , and an indirect one using the cycle C_e that covers e . It is noteworthy that this is the best that one can hope for if the graph is two-edge connected. Handling stronger adversaries, who collude on k edges in a single round, requires that the communication graph is at least $(k + 1)$ -edge connected. We then need a generalization of low-congestion cycle cover that leverages this high connectivity, by covering each edge with many (nearly) edge-disjoint cycles, rather than a single one.

To illustrate our ideas in the cleanest way, we consider an eavesdropper adversary in k -edge connected graphs. The adversary is allowed to eavesdrop to a fixed set of at most k' edges (unknown to the graph participants) in each round during the simulation. Ideally, we would want to make k' as large as possible. Our goal is to compile any given distributed algorithm \mathcal{A} into a k' -secure algorithm \mathcal{A}' , that has the same output as \mathcal{A} , but provides resilience against such adversaries. In other words, the resilient algorithm \mathcal{A}' must guarantee that the adversary learns nothing by eavesdropping to any fixed collection of k' edges of the graph. Towards that goal, we cover each edge $e = (u, v)$ not by a single cycle (as in the standard cycle cover), but rather by a collection of $(k' \cdot \eta + 1)$ cycles with overlap η . In other words, there is a collection $\mathcal{C}_e \subseteq \mathcal{C}$ of $(k' \cdot \eta + 1)$ cycles containing e , such that each edge $e' \in E(G) \setminus \{e\}$ appears on at most η cycles of \mathcal{C}_e . This provides u and v with a communication backbone that is k' -connected and thus resilient to any adversary

who takes over k' edges of the graph. The efficiency of this scheme depends on several parameters that are captured by the following generalization of cycle covers.

Definition 5 (Cycle Covers of Higher Connectivity). *A $(\mathbf{d}, \mathbf{c}, \eta, k)$ -cycle cover for a graph $G = (V, E)$ is a collection \mathcal{C} of cycles satisfying:*

- **Congestion:** *Each edge $e \in E(G)$ appears on at most \mathbf{c} cycles in \mathcal{C} .*
- **(k, η) Covering:** *For each edge $e \in E(G)$, there is a collection $\mathcal{C}_e = \{C_{e,1}, \dots, C_{e,k}\}$ of k cycles that contain e , with overlap η ; that is, each edge $e' \in E(G) \setminus \{e\}$ appears on at most η cycles of \mathcal{C}_e .*
- **Length:** *Each cycle in \mathcal{C} has length at most \mathbf{d} .*

Our key contribution is in providing an algorithm that computes a $(\mathbf{d}, \mathbf{c}, \eta, k)$ -cycle cover, given a tree packing of size k , congestion η and diameter $O(d/\log n)$, where $\mathbf{c} = O(k \cdot \eta \cdot \log^3 n)$.

Lemma 7.19. *[From Tree Packing to High-Connectivity Cycle Cover] There is an efficient randomized algorithm, that, given a tree packing \mathcal{T} of k spanning trees with congestion $\eta - 1$ and diameter D , where $\eta \in [2, k + 1]$, computes a $(\mathbf{d}, \mathbf{c}, \eta, k')$ -cycle cover with $\mathbf{c} = O(k \cdot \eta \cdot \log^3 n)$, $\mathbf{d} = O(D \log n)$ and $k' = k - \eta + 1$. The bounds on the congestion \mathbf{c} and the (k, η) covering property hold w.h.p., while the cycle length bound holds with probability 1.*

By combining Theorem 3.2 and Theorem 1.4 respectively with Lemma 7.19, we obtain the following immediate corollary:

Corollary 7.20. *(1) There is an efficient randomized algorithm that, given a k -edge connected D -diameter graph G , w.h.p. computes a $(\mathbf{d}, \mathbf{c}, \eta, k/2)$ cycle cover with $\eta = O(1)$, $\mathbf{d} = O((101k \ln n)^D \cdot \log n)$ and $\mathbf{c} = O(k \log^3 n)$ (all these properties hold w.h.p.).*

(2) There is an efficient randomized algorithm, that given a (k, D) -connected graph G , w.h.p. computes a $(\mathbf{d}, \mathbf{c}, \eta, k)$ cycle cover with $\mathbf{c} = O(k \log^4 n)$, $\eta = O(\log n)$ and $\mathbf{d} = O(D \log^2 n)$.

Proof of Lemma 7.19 We start with a short overview of the cycle cover algorithm from [PY19].

Overview of Algorithm CycleCover of [PY19]. The algorithm starts by constructing a BFS tree T of the graph G , and then proceeds in two stages. In the first stage, it uses Procedure **NonTreeCover** to construct a cycle cover \mathcal{C}_1 for all non-tree edges – the edges of $E(G) \setminus E(T)$. In the second stage, Procedure **TreeCover** is employed in order to cover the remaining tree edges by a new collection \mathcal{C}_2 of cycles.

The initial collection \mathcal{C}_1 of cycles has some useful properties that will be exploited in our algorithm.

Fact 2. *[Properties of Algorithm NonTreeCover] Let T be the tree used in the algorithm. Then: (i) each non-tree edge $e \in E(G) \setminus E(T)$ belongs to a single cycle in \mathcal{C}_1 ; (ii) the length of each cycle in \mathcal{C}_1 is $O(\text{Depth}(T) \cdot \log n)$; (iii) each cycle $C \in \mathcal{C}_1$ contains at most $2 \log n$ edges of $E(G) \setminus E(T)$; and (iv) each tree edge $e \in E(T)$ belongs to at most $O(\log n)$ cycles in \mathcal{C}_1 .*

From Low-Diameter Tree Packing to Highly Connected Cycle Cover. Let $\mathcal{T} = \{T_1, \dots, T_k\}$ be the given tree packing of congestion $\eta - 1$ and diameter D .

Our algorithm will compute, for each tree $T_i \in \mathcal{T}$, a collection \mathcal{C}^i of cycles that covers all edges of $E(G) \setminus E(T_i)$ – that is, the edges that are non-tree edges for T_i , using Algorithm **NonTreeCover**. Recall that an edge $e \in E(G)$ may belong to at most $\eta - 1$ trees, and so e is a non-tree edge for at least $k - \eta + 1$ trees. For each such tree T_i , at least one cycle in \mathcal{C}^i will cover it.

Specifically, our algorithm processes each tree T_i one-by-one, and for each such tree it computes a collection \mathcal{C}^i of cycles, using Algorithm **NonTreeCover**. The final collection \mathcal{C} of cycles is obtained by taking the union over all resulting sets of cycles: $\mathcal{C} = \bigcup_{i=1}^k \mathcal{C}^i$. Consider now some index $1 \leq i \leq k$. Every cycle $C \in \mathcal{C}^i$ contains two types of edges: the non-tree edges, that lie in $G \setminus T_i$ and the tree edges, that appear in T_i . When processing the tree T_i , for $i \geq 2$, our goal will be to compute a cycle-cover \mathcal{C}^i that covers each edge $e \notin T_i$ by a short cycle C_e^i , such that if $e' \in E(C_e^i) \setminus \{e\}$ is a non-tree edge (that is, $e' \notin E(T_i)$), then it may not belong, as a non-tree edge, to any other cycle that covered the edge e in previous iterations.

The key observation is that due to property (iii) of Fact 2, there are at most $(i - 1) \cdot 2 \cdot \log n = O(k \log n)$ non-tree edges that need to be avoided when covering the edge e using the tree T_i . In order to avoid such edges, we apply an algorithm that is inspired by a sampling procedure that is mostly used in the setting of fault tolerant network design [WY13, DK11].

We now describe in details the i^{th} phase, where the collection \mathcal{C}^i of cycles is computed.

Computing the cycle collection \mathcal{C}^i using the tree T_i . We compute the collection \mathcal{C}^i of cycles in $\ell = \lceil 30k \log^2 n \rceil$ iterations, where in each iteration $j \in \{1, \dots, \ell\}$, we compute a collection \mathcal{C}_j^i of cycles, as follows. We let $G_{i,j}$ be the subgraph of G obtained by sampling each edge $e \in E(G) \setminus T_i$ with probability $p = 1/(2k \cdot \log n)$, and adding all edges of T_i to the resulting graph. In other words, $G_{i,j} = G[p] \cup T_i$. Let \mathcal{C}_j^i be the cycle collection obtained by applying Algorithm **NonTreeCover** to the graph $G_{i,j}$ and the tree T_i . After we complete the ℓ th iteration, we set $\mathcal{C}^i = \bigcup_{j=1}^{\ell} \mathcal{C}_j^i$. This concludes the description of the algorithm. Lastly, we set $\mathcal{C} = \bigcup_{i=1}^k \mathcal{C}^i$. We now show that set \mathcal{C} of cycles has all required properties with high probability.

Cycle Length: It is easy to verify that the length of every cycle in \mathcal{C} is bounded by $O(D \log n)$, from Property (ii) of Fact 2.

We next consider the covering property by showing that each edge e is covered by at least $k - \eta + 1$ cycles with overlap (at most) η .

$(k - \eta + 1, \eta)$ **Covering:** We prove the $(k - \eta + 1, \eta)$ -covering property in the following claim.

Claim 7.21. *With high probability, for every edge $e \in E(G)$, there is a collection $\mathcal{C}(e) \subseteq \mathcal{C}$ of at least $k - \eta + 1$ cycles, such that each edge $e' \in E(G) \setminus \{e\}$ appears on at most η cycles of $\mathcal{C}(e)$.*

Proof: For each iteration $1 \leq i \leq \ell$, we call the edges of $E(G) \setminus E(T_i)$ *non-tree edges for iteration i* , and we call the edges of $E(T_i)$ *tree edges for iteration i* . Similarly, for a cycle $C \in \mathcal{C}^i$, the edges of C that lie in T_i are called *tree edges*, and the remaining edges of C are called *non-tree edges*.

Let $\{T_{i_1}, \dots, T_{i_{k-\eta+1}}\}$ be a set of $k - \eta + 1$ trees of \mathcal{T} , that do not contain the edge e , where $j_1 < j_2 < \dots < j_{k-\eta+1}$. Such collection of trees must exist, since the trees in \mathcal{T} cause edge-congestion at most $\eta - 1$.

We show by induction that for all $1 \leq z \leq k - \eta + 1$, set \mathcal{C}^{i_z} of cycles with high probability contains a cycle $C^z(e)$, such that $e \in C^z(e)$, and moreover, if $e' \in C^z(e) \setminus \{e\}$ is a non-tree edge, and $e' \in C^{z'}(e)$ for some $z' < z$, then e' must be a tree edge for $C^{z'}(e)$. In other words, the non-tree edges of $C^z(e)$ are disjoint from the non-tree edges of $C^1(e), \dots, C^{z-1}(e)$. The proof proceeds by induction.

For $z = 1$, we show that with high probability there is some cycle $C^1(e) \in \mathcal{C}^{i_1}$ that contains e . Indeed, for all $1 \leq j \leq \ell$, the edge e is added to graph $G_{i_1,j}$ with probability $p = 1/(2k \log n)$. Since $\ell = \lceil 30k \log^2 n \rceil$, with probability at least $1 - 1/n^{10}$, there exists an iteration j with $e \in G_{i_1,j}$. By property (i) of Fact 2, the edge e is covered by exactly one cycle in $\mathcal{C}_j^{i_1}$, that we denote by $C^1(e)$.

Assume now that we have defined the cycles $C^1(e), \dots, C^{z-1}(e)$ in cycle sets $\mathcal{C}^{i_1}, \dots, \mathcal{C}^{i_{z-1}}$ respectively, such that the non-tree edges of all these cycles are disjoint. We show that w.h.p. \mathcal{C}^{i_z} contains a cycle $C^z(e)$, that covers e , such that its non-tree edges are disjoint from the non-tree edges (except for the mutual edge e) of all the previous cycles, namely, $C^1(e), \dots, C^{z-1}(e)$.

Let $F_z(e)$ be the collection of all non-trees edges of the cycles $C^1(e), \dots, C^{z-1}(e)$, excluding the mutual edge e . By property (iii) of Fact 2, $|F_z(e)| \leq 2(z-1) \log n \leq 2 \cdot k \log n$. An iteration q in phase i_z is said to be *successful* for the edge e , if the following two events hold: (a) $e \in G_{i_z,q}$; and (b) $F_z(e) \cap G_{i_z,q} = \emptyset$. We next show that with probability at least $1 - 1/n^8$, at least one iteration of phase i_z is successful for the edge e .

Indeed, the probability that a specific iteration q is successful for the edge e is at least:

$$(1 - p)^{|F_z(e)|} \cdot p \leq (1 - p)^{2 \cdot k \log n} \cdot p \leq p/e = 1/(2ek \log n).$$

Since there are at least $30 \cdot k \log^2 n$ iterations, with probability at least $1 - n^{-8}$, there is at least one successful iteration for e in phase i_z . (By applying the union bound over all k phases, this holds for the edge e with probability $1 - n^{-7}$).

Let q be such a successful iteration for the edge e in phase i_z . Since e is a non-tree edge of T_{i_z} , when applying Algorithm **NonTreeCover** to the tree T_{i_z} and the subgraph $G_{i_z,q}$, by property (i) of Fact 2 the resulting cycle collection $\mathcal{C}_q^{i_z}$ contains exactly one cycle covering e , that we denote by $C^z(e)$. By the definition of a successful iteration, $C^z(e) \cap F_z(e) = \emptyset$, as desired.

We conclude that with high probability, there is a collection $C^1(e), \dots, C^{k-\eta+1}(e)$ of cycles in \mathcal{C} , that contain e and are disjoint in their non-tree edges (except for sharing the edge e). We set $\mathcal{C}(e) = \{C^1(e), \dots, C^{k-\eta+1}(e)\}$

Finally, we claim that each edge $e' \neq e$ appears on at most η cycles of $\mathcal{C}(e)$. By definition, each edge $e' \neq e$ can serve as a non-tree edge of at most *one* cycle. In addition, recall that each cycle $C^z(e)$ is computed in phase i_z by applying Algorithm **NonTreeCover** to the tree T_{i_z} . Since each edge e' may belong to at most $\eta - 1$ trees of \mathcal{T} , it may appear as a tree edge on at most $\eta - 1$ cycles. \square

Congestion: We first bound the number of cycles in \mathcal{C} that contains a given edge e as a non-tree edge. Fix a phase i such that $e \notin T_i$. There are $\ell = O(k \log^2 n)$ iterations in phase i . In each iteration, every edge e is sampled independently with probability $p = 1/(2k \log n)$. Therefore, by the Chernoff bound, with high probability, edge e is sampled in at most $O(\log n)$ iterations of a given phase. In each iteration q of phase i , we apply Algorithm **NonTreeCover**. By property (i) of Fact 2, every non-tree edge appears on exactly one cycle in \mathcal{C}_q^i . Therefore, e appears on at most $O(\log n)$ cycles in the cycle collection \mathcal{C}^i . By summing over all k phases, an edge e may appear as

a non-tree edge on at most $O(k \log n)$ cycles.

We next turn to bound the number of cycles that contains a fixed edge e as a tree edge. Fix a tree T_i where $e \in T_i$. By property (iv) of Fact 2, e appears on $O(\log n)$ cycles in each application of Algorithm NonTreeCover. Since there are $O(k \log^2 n)$ applications of this algorithm on T_i , and since e appears on at most η trees, overall it appears as a tree edge in $O(k \cdot \eta \cdot \log^3 n)$ cycles. This concludes the proof of Lemma 7.19. \square

We conclude by showing an immediate application of $(\mathbf{d}, \mathbf{c}, \eta, k)$ -cycle cover to resilient computation in the presence of eavesdropper.

Lemma 7.22 (Compiler for Eavesdropping in Highly Connected Graphs). *Assume that a $(\mathbf{d}, \mathbf{c}, \eta, k)$ -cycle cover \mathcal{C} is computed in a pre-processing phase. Then, any distributed algorithm \mathcal{A} can be compiled into an algorithm \mathcal{A}' that is resilient to an eavesdropping adversary listening on at most $k' \leq \lfloor k/(2a\eta \cdot \log n) - 1 \rfloor$ edges in the graph, for some constant a , in every round. W.h.p. this incurs a multiplicative overhead of $\tilde{O}(\mathbf{d} \cdot \mathbf{c} \cdot \eta)$ in the number of rounds.*

Proof: The compiler works round-by-round. Fix a round i of algorithm \mathcal{A} . Observe that the round is fully specified by the collection of messages sent on the edges at this round. We will simulate this round in \mathcal{A}' using a total of $\tilde{O}(\mathbf{d} \cdot \mathbf{c} \cdot \eta)$ rounds. Consider an edge $e = (u, v)^6$ and let $M = M_e$ be the message sent on the edge e in this round from u to v .

For each edge $e = (u, v)$ we will have a subalgorithm A_e that securely sends the original message M from u to v in a total of $O(\mathbf{d} \cdot \eta)$ rounds. The algorithm will run all these subalgorithm A_e for every edge e in parallel using the random delay approach. We first describe A_e and then show that it is indeed secure even if the adversary listens over k' edges in each round, possibly picking a different set of edges in every round. Then we will show how to run all these A_e algorithm in parallel while maintaining the security of each of them.

Algorithm A_e consists of $2\mathbf{d}$ phases, each containing η rounds. Each of the k cycles C_1, \dots, C_k covering e corresponds to a distinct u - v path, where the length of the path from cycle C_i is denoted by d_i . By definition, $d_i \leq \mathbf{d}$. The message M is secret shared by the sender u into $\ell = \sum_{i=1}^k (2\mathbf{d} - d_i + 1)$ shares, where on the i^{th} path (i.e., $C_i \setminus \{(u, v)\}$), u sends a distinct set of $2\mathbf{d} - d_i + 1 \leq 2\mathbf{d}$ shares for every $i \in \{1, \dots, k\}$. These shares are sent on each path in a pipeline manner at a speed of one share per phase on each of the paths. Since each phase consists of η rounds, we will be able to pass the at most η messages that need to go through an edge in a given phase (due to at most η different paths that go through this edge). In addition, since the messages are sent in a pipeline manner on each path, in $2\mathbf{d}$ phases, v receives $2\mathbf{d} - d_i + 1 \geq \mathbf{d}$ messages from u via the i^{th} path of length d_i . Overall, v receives at least $\ell \geq \mathbf{d} \cdot k$ shares during the $2\mathbf{d}$ phases of algorithm A_e . Since the adversary can manipulate at most k' messages in a round, it can listen to at most $k' \cdot 2\mathbf{d} \cdot \eta < \ell$ messages, and therefore there is at least one missing share that it did not receive.

Finally, we show that all these secure subalgorithms A_e can be run in parallel without compromising security. We use the scheduling algorithm of Ghaffari [Gha15b] (see Theorem 7.1), that proceeds in phases, where each phase has $a \cdot \log n$ rounds for some constant a . Each subalgorithm A_e has a random starting point and proceeds at a speed of one phase at a time. The argument shows

⁶As before, we view the edge $e = (u, v)$ as a directed edge where the message is sent from u to v . Thus we will use the cycles covering e twice: to send the message from u to v and vice-versa.

that due to the random start of each algorithm, there are at most $a \log n$ algorithms that send a message on a fixed edge in a given phase, hence all these messages sent through an edge fit within the phase window of $a \log n$ rounds. In the final scheduling, the total number of rounds in which the messages of A_e are sent is at most $r' = a \cdot \log n \cdot 2d \cdot \eta$ (this is because A_e has $2d\eta$ rounds, and thus simulated in $2d\eta$ phases, each of length $a \log n$ rounds). Thus the adversary can listen to at most $r' \cdot k'$ messages of the A_e algorithm. Since $r' \cdot k' < \ell$, the adversary did not receive at least one of the shares.

Finally we bound the running time of the whole algorithm. Each algorithm A_e takes $O(d\eta)$ rounds and the dominant part in the round complexity of the final compiler is dominated by the edge congestion of all these algorithms. A single subalgorithm A_e sends $O(d \cdot \eta)$ messages over each edge e' . Since each cycle C is used by at most $O(\log n)$ edges (the non-tree edges of that cycle), and since each edge e' appears on at most c other cycles, over all each edge e' participates on $\tilde{O}(c)$ algorithms A_e . Thus overall at most $\tilde{O}(d \cdot c \cdot \eta)$ messages are sent over a single edge. By Theorem 7.1, we get that running all the A_e subalgorithms in parallel takes $\tilde{O}(c \cdot d \cdot \eta)$ rounds using the random delay approach. \square

By combining with Corollary 7.20 we get the following:

Corollary 7.23. (1) *Given a k -edge connected D -diameter graph G with a $(d, c, \eta, k/2)$ cycle cover satisfying $\eta = O(1)$, $d = O((101k \ln n)^D \cdot \log n)$, and $c = O(k \log^3 n)$ computed in a preprocessing step. Any distributed algorithm \mathcal{A} can be compiled into an algorithm \mathcal{A}' that is resilient to an eavesdropping adversary listening on at most $k' = O(k/\log n)$ edges in the graph, in every round. W.h.p. this incurs a multiplicative overhead of $\tilde{O}((101k \ln n)^D \cdot k)$ in the number of rounds.*

(2) *Given a (k, D) -connected graph G with a (d, c, η, k) cycle cover satisfying $\eta = O(\log n)$, $d = O(D \log^2 n)$, and $c = O(k \log^4 n)$ computed in a preprocessing step. Any distributed algorithm \mathcal{A} can be compiled into an algorithm \mathcal{A}' that is resilient to an eavesdropping adversary listening on at most $k' = O(k/\log^2 n)$ edges in the graph. W.h.p. this incurs a multiplicative overhead of $\tilde{O}(D \cdot k)$ in the number of rounds.*

Secure Broadcast. The task of broadcasting a single message M from a source vertex s over a spanning tree is arguably one of the most fundamental communication primitives. We consider the task of secure broadcast in the setting of *store-and-forward* routing algorithms. In this setting all nodes, except for the source node s , can only forward the messages they receive and cannot send messages formed by any combination of the previously received messages. This class of algorithms follows the classical paradigm of message routing, that is used in telecommunications and wireless networks. The security of the broadcast scheme is with respect to an eavesdropper adversary who listens to messages sent over at most k' edges in the graph. Our goal is to perform a simple store-and-forward broadcast with a guarantee that the adversary learns nothing – in the information-theoretic sense – about the original message M .

We show, using the low-diameter tree packing from Claim 7.2, that there exists a simple store-and-forward *secure* broadcast algorithm that w.h.p. runs in $\tilde{O}((101k \log n)^D)$ rounds. Let $\mathcal{T} = \{T_1, \dots, T_k\}$ be the collection of trees with congestion $c' \log n$ for some constant c' obtained by using Claim 7.2 with $\eta = 1$. The diameter of these trees is $\tilde{O}((101k \log n)^D)$ with high probability. The sender u secret shares the message M to k random shares M_1, \dots, M_k such that $M_1 \oplus \dots \oplus M_k = M$. Each share M_i is broadcast on the tree T_i . The collection of all k shares can be sent in

$\tilde{O}((101k \log n)^D)$ rounds over the trees. Since all trees T_1, \dots, T_k are spanning, every vertex $v \in G$ receives the k shares and can compute M . However, since each edge appears on at most $c' \log n$ trees, any adversary that listens on $k' = \lfloor k/(c' \log n + 1) \rfloor$ edges can learn at most $k - 1$ shares, and hence learns nothing on the original message M . Overall, by Claim 5.2 and the random delay approach of Theorem 7.1, the total round complexity is bounded by $\tilde{O}((101k \log n)^D)$ with high probability.

7.5 Useful Lemmas for Bounded Independence

We first need the notion of d -wise independent hash functions as presented in [Vad12].

Definition 6 (Definition 3.31 in [Vad12]). *For $N, M, d \in \mathbb{N}$ such that $d \leq N$, a family of functions $\mathcal{H} = \{h : [N] \rightarrow [M]\}$ is d -wise independent if for all distinct $x_1, x_2, \dots, x_d \in [N]$, the random variables $H(x_1), \dots, H(x_d)$ are independent and uniformly distributed in $[M]$ when H is chosen randomly from \mathcal{H} .*

Vadhan [Vad12] presented an explicit construction of \mathcal{H} , with the following parameters.

Lemma 7.24 (Corollary 3.34 in [Vad12]). *For every $\gamma, \beta, d \in \mathbb{N}$, there is a family of d -wise independent functions $\mathcal{H}_{\gamma, \beta} = \{h : \{0, 1\}^\gamma \rightarrow \{0, 1\}^\beta\}$ such that choosing a random function from $\mathcal{H}_{\gamma, \beta}$ takes $d \cdot \max\{\gamma, \beta\}$ random bits, and evaluating a function from $\mathcal{H}_{\gamma, \beta}$ takes time $\text{poly}(\gamma, \beta, d)$.*

We use the following Chernoff bound for d -wise independent random variables from [SSS95].

Theorem 7.25. *Let X_1, \dots, X_n be d -wise independent random variables taking values in $[0, 1]$, where $X = \sum_{i=1}^n X_i$ and $\mathbb{E}[X] = \mu$. Then for all $\epsilon \leq 1$ we have that if $d \leq \lfloor \epsilon^2 \mu e^{-1/3} \rfloor$ then:*

$$\Pr[|X - \mu| \geq \epsilon \mu] \leq e^{-\lfloor d/2 \rfloor}.$$

And if $d > \lfloor \epsilon^2 \mu e^{-1/3} \rfloor$ then:

$$\Pr[|X - \mu| \geq \epsilon \mu] \leq e^{-\lfloor \epsilon^2 \mu / 3 \rfloor}.$$

References

- [CGK14] Keren Censor-Hillel, Mohsen Ghaffari, and Fabian Kuhn. Distributed connectivity decomposition. In *ACM Symposium on Principles of Distributed Computing, PODC '14, Paris, France, July 15-18, 2014*, pages 156–165, 2014.
- [CHGG⁺15] Keren Censor-Hillel, Mohsen Ghaffari, George Giakkoupis, Bernhard Haeupler, and Fabian Kuhn. Tight bounds on vertex connectivity under vertex sampling. In *Proceedings of the twenty-sixth annual ACM-SIAM symposium on Discrete algorithms*, pages 2006–2018. Society for Industrial and Applied Mathematics, 2015.
- [CHGK14] Keren Censor-Hillel, Mohsen Ghaffari, and Fabian Kuhn. A new perspective on vertex connectivity. In *Proceedings of the twenty-fifth annual ACM-SIAM symposium on Discrete algorithms*, pages 546–561. Society for Industrial and Applied Mathematics, 2014.
- [CK08] Julia Chuzhoy and Sanjeev Khanna. Algorithms for single-source vertex connectivity. In *2008 49th Annual IEEE Symposium on Foundations of Computer Science*, pages 105–114. IEEE, 2008.
- [DG19] Michal Dory and Mohsen Ghaffari. Improved distributed approximations for minimum-weight two-edge-connected spanning subgraph. *arXiv preprint arXiv:1905.10833*, 2019.
- [DHNS19] Mohit Daga, Monika Henzinger, Danupon Nanongkai, and Thatchaphol Saranurak. Distributed edge connectivity in sublinear time. In *Proceedings of the 51st Annual ACM SIGACT Symposium on Theory of Computing*, pages 343–354. ACM, 2019.
- [DK11] Michael Dinitz and Robert Krauthgamer. Fault-tolerant spanners: better and simpler. In *Proceedings of the 30th annual ACM SIGACT-SIGOPS symposium on Principles of distributed computing*, pages 169–178. ACM, 2011.
- [Dor18] Michal Dory. Distributed approximation of minimum k-edge-connected spanning subgraphs. In *Proceedings of the 2018 ACM Symposium on Principles of Distributed Computing*, pages 149–158. ACM, 2018.
- [DP09] Devdatt Dubhashi and Alessandro Panconesi. *Concentration of Measure for the Analysis of Randomized Algorithms*. Cambridge University Press, New York, NY, USA, 1st edition, 2009.
- [GH16a] Mohsen Ghaffari and Bernhard Haeupler. Distributed algorithms for planar networks ii: Low-congestion shortcuts, mst, and min-cut. In *Proceedings of the twenty-seventh annual ACM-SIAM symposium on Discrete algorithms*, pages 202–219. SIAM, 2016.
- [GH16b] Mohsen Ghaffari and Bernhard Haeupler. Distributed algorithms for planar networks II: low-congestion shortcuts, mst, and min-cut. In *Proceedings of the Twenty-Seventh Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2016, Arlington, VA, USA, January 10-12, 2016*, pages 202–219, 2016.

- [Gha15a] Mohsen Ghaffari. Distributed broadcast revisited: Towards universal optimality. In *International Colloquium on Automata, Languages, and Programming*, pages 638–649. Springer, 2015.
- [Gha15b] Mohsen Ghaffari. Near-optimal scheduling of distributed algorithms. In *Proceedings of the 2015 ACM Symposium on Principles of Distributed Computing*, pages 3–12. ACM, 2015.
- [Gha17] Mohsen Ghaffari. *Improved Distributed Algorithms for Fundamental Graph Problems*. PhD thesis, MIT, USA, 2017.
- [GK13] Mohsen Ghaffari and Fabian Kuhn. Distributed minimum cut approximation. In *International Symposium on Distributed Computing*, pages 1–15. Springer, 2013.
- [GKS17a] Mohsen Ghaffari, Fabian Kuhn, and Hsin-Hao Su. Distributed mst and routing in almost mixing time. In *Proceedings of the ACM Symposium on Principles of Distributed Computing*, pages 131–140. ACM, 2017.
- [GKS17b] Mohsen Ghaffari, Fabian Kuhn, and Hsin-Hao Su. Distributed MST and routing in almost mixing time. In *Proceedings of the ACM Symposium on Principles of Distributed Computing, PODC 2017, Washington, DC, USA, July 25-27, 2017*, pages 131–140, 2017.
- [GL18] Mohsen Ghaffari and Jason Li. New distributed algorithms in almost mixing time via transformations from parallel algorithms. In *32nd International Symposium on Distributed Computing, DISC 2018, New Orleans, LA, USA, October 15-19, 2018*, pages 31:1–31:16, 2018.
- [GNT20] Mohsen Ghaffari, Krzysztof Nowicki, and Mikkel Thorup. Faster algorithms for edge connectivity via random 2-out contractions. In *Proceedings of the Fourteenth Annual ACM-SIAM Symposium on Discrete Algorithms*, pages 1260–1279. SIAM, 2020.
- [HIZ16] Bernhard Haeupler, Taisuke Izumi, and Goran Zuzic. Near-optimal low-congestion shortcuts on bounded parameter graphs. In *International Symposium on Distributed Computing*, pages 158–172. Springer, 2016.
- [HL18] Bernhard Haeupler and Jason Li. Faster distributed shortest path approximations via shortcuts. In *32nd International Symposium on Distributed Computing, DISC 2018, New Orleans, LA, USA, October 15-19, 2018*, pages 33:1–33:14, 2018.
- [HLZ18] Bernhard Haeupler, Jason Li, and Goran Zuzic. Minor excluded network families admit fast distributed algorithms. In *Proceedings of the 2018 ACM Symposium on Principles of Distributed Computing*, pages 465–474. ACM, 2018.
- [IR88] Alon Itai and Michael Rodeh. The multi-tree approach to reliability in distributed networks. *Information and Computation*, 79(1):43–59, 1988.
- [Kai12] Tomáš Kaiser. A short proof of the tree-packing theorem. *Discrete Mathematics*, 312(10):1689–1691, 2012.

- [Kar99] David R Karger. Random sampling in cut, flow, and network design problems. *Mathematics of Operations Research*, 24(2):383–413, 1999.
- [KKOI19] Naoki Kitamura, Hirotaka Kitagawa, Yota Otachi, and Taisuke Izumi. Low-congestion shortcut and graph parameters. In *33rd International Symposium on Distributed Computing (DISC 2019)*. Schloss Dagstuhl-Leibniz-Zentrum fuer Informatik, 2019.
- [Kuh14] Fabian Kuhn. A distributed perspective on graph connectivity and cuts. In *26th ACM Symposium on Parallelism in Algorithms and Architectures, SPAA '14, Prague, Czech Republic - June 23 - 25, 2014*, page 1, 2014.
- [LMR94] Frank Thomson Leighton, Bruce M Maggs, and Satish B Rao. Packet routing and job-shop scheduling in (congestion+ dilation) steps. *Combinatorica*, 14(2):167–186, 1994.
- [LPP06] Zvi Lotker, Boaz Patt-Shamir, and David Peleg. Distributed MST for constant diameter graphs. *Distributed Computing*, 18(6):453–460, 2006.
- [NS14] Danupon Nanongkai and Hsin-Hao Su. Almost-tight distributed minimum cut algorithms. In *International Symposium on Distributed Computing*, pages 439–453. Springer, 2014.
- [NW61] CSJA Nash-Williams. Edge-disjoint spanning trees of finite graphs. *Journal of the London Mathematical Society*, 1(1):445–450, 1961.
- [Pel00] David Peleg. *Distributed Computing: A Locality-sensitive Approach*. SIAM, 2000.
- [PT11] David Pritchard and Ramakrishna Thurimella. Fast computation of small cuts via cycle space sampling. *ACM Transactions on Algorithms (TALG)*, 7(4):46, 2011.
- [PY19] Merav Parter and Eylon Yogev. Low congestion cycle covers and their applications. In *Proceedings of the Thirtieth Annual ACM-SIAM Symposium on Discrete Algorithms*, pages 1673–1692. SIAM, 2019.
- [SHK⁺12] Atish Das Sarma, Stephan Holzer, Liah Kor, Amos Korman, Danupon Nanongkai, Gopal Pandurangan, David Peleg, and Roger Wattenhofer. Distributed verification and hardness of distributed approximation. *SIAM Journal on Computing*, 41(5):1235–1265, 2012.
- [SSS95] Jeanette P. Schmidt, Alan Siegel, and Aravind Srinivasan. Chernoff-hoeffding bounds for applications with limited independence. *SIAM J. Discrete Math.*, 8(2):223–250, 1995.
- [Tut61] William Thomas Tutte. On the problem of decomposing a graph into n connected factors. *Journal of the London Mathematical Society*, 1(1):221–230, 1961.
- [Vad12] Salil P. Vadhan. Pseudorandomness. *Foundations and Trends in Theoretical Computer Science*, 7(1-3):1–336, 2012.
- [WY13] Oren Weimann and Raphael Yuster. Replacement paths and distance sensitivity oracles via fast matrix multiplication. *ACM Transactions on Algorithms (TALG)*, 9(2):14, 2013.