

Progressive Multigrid Eigensolvers for Multiscale Spectral Segmentation

Michael Maire¹ and Stella X. Yu²

¹California Institute of Technology - Pasadena, CA

²University of California at Berkeley / ICSI - Berkeley, CA

Overview

Goal: Efficient multiscale spectral clustering

Solution: Multigrid eigensolver on multiscale graph

- Pyramid with cross-scale constraints
- Scale-dependent cues active at each pyramid level
- Multigrid:
 - Process coarse-to-fine sub-pyramids
 - Many early iterations on small sub-pyramids
 - Fewer later iterations on full pyramid
 - Work with intermediate basis instead of eigenvectors
- Parallelizable for *arbitrary* graph structure (unlike [2])



Technical Approach:

- Angular Embedding [9] (generalization of Normalized Cuts)
- Constrained spectral clustering [10]
- Constraint-based coarse-to-fine interpolation
- Randomized methods for matrix approximation [5]
- Self-check for convergence

Image Segmentation Results:

- Order of magnitude speedup (from multigrid alone; parallelization may further improve)
- Automatic inter-scale edge alignment

System Comparison

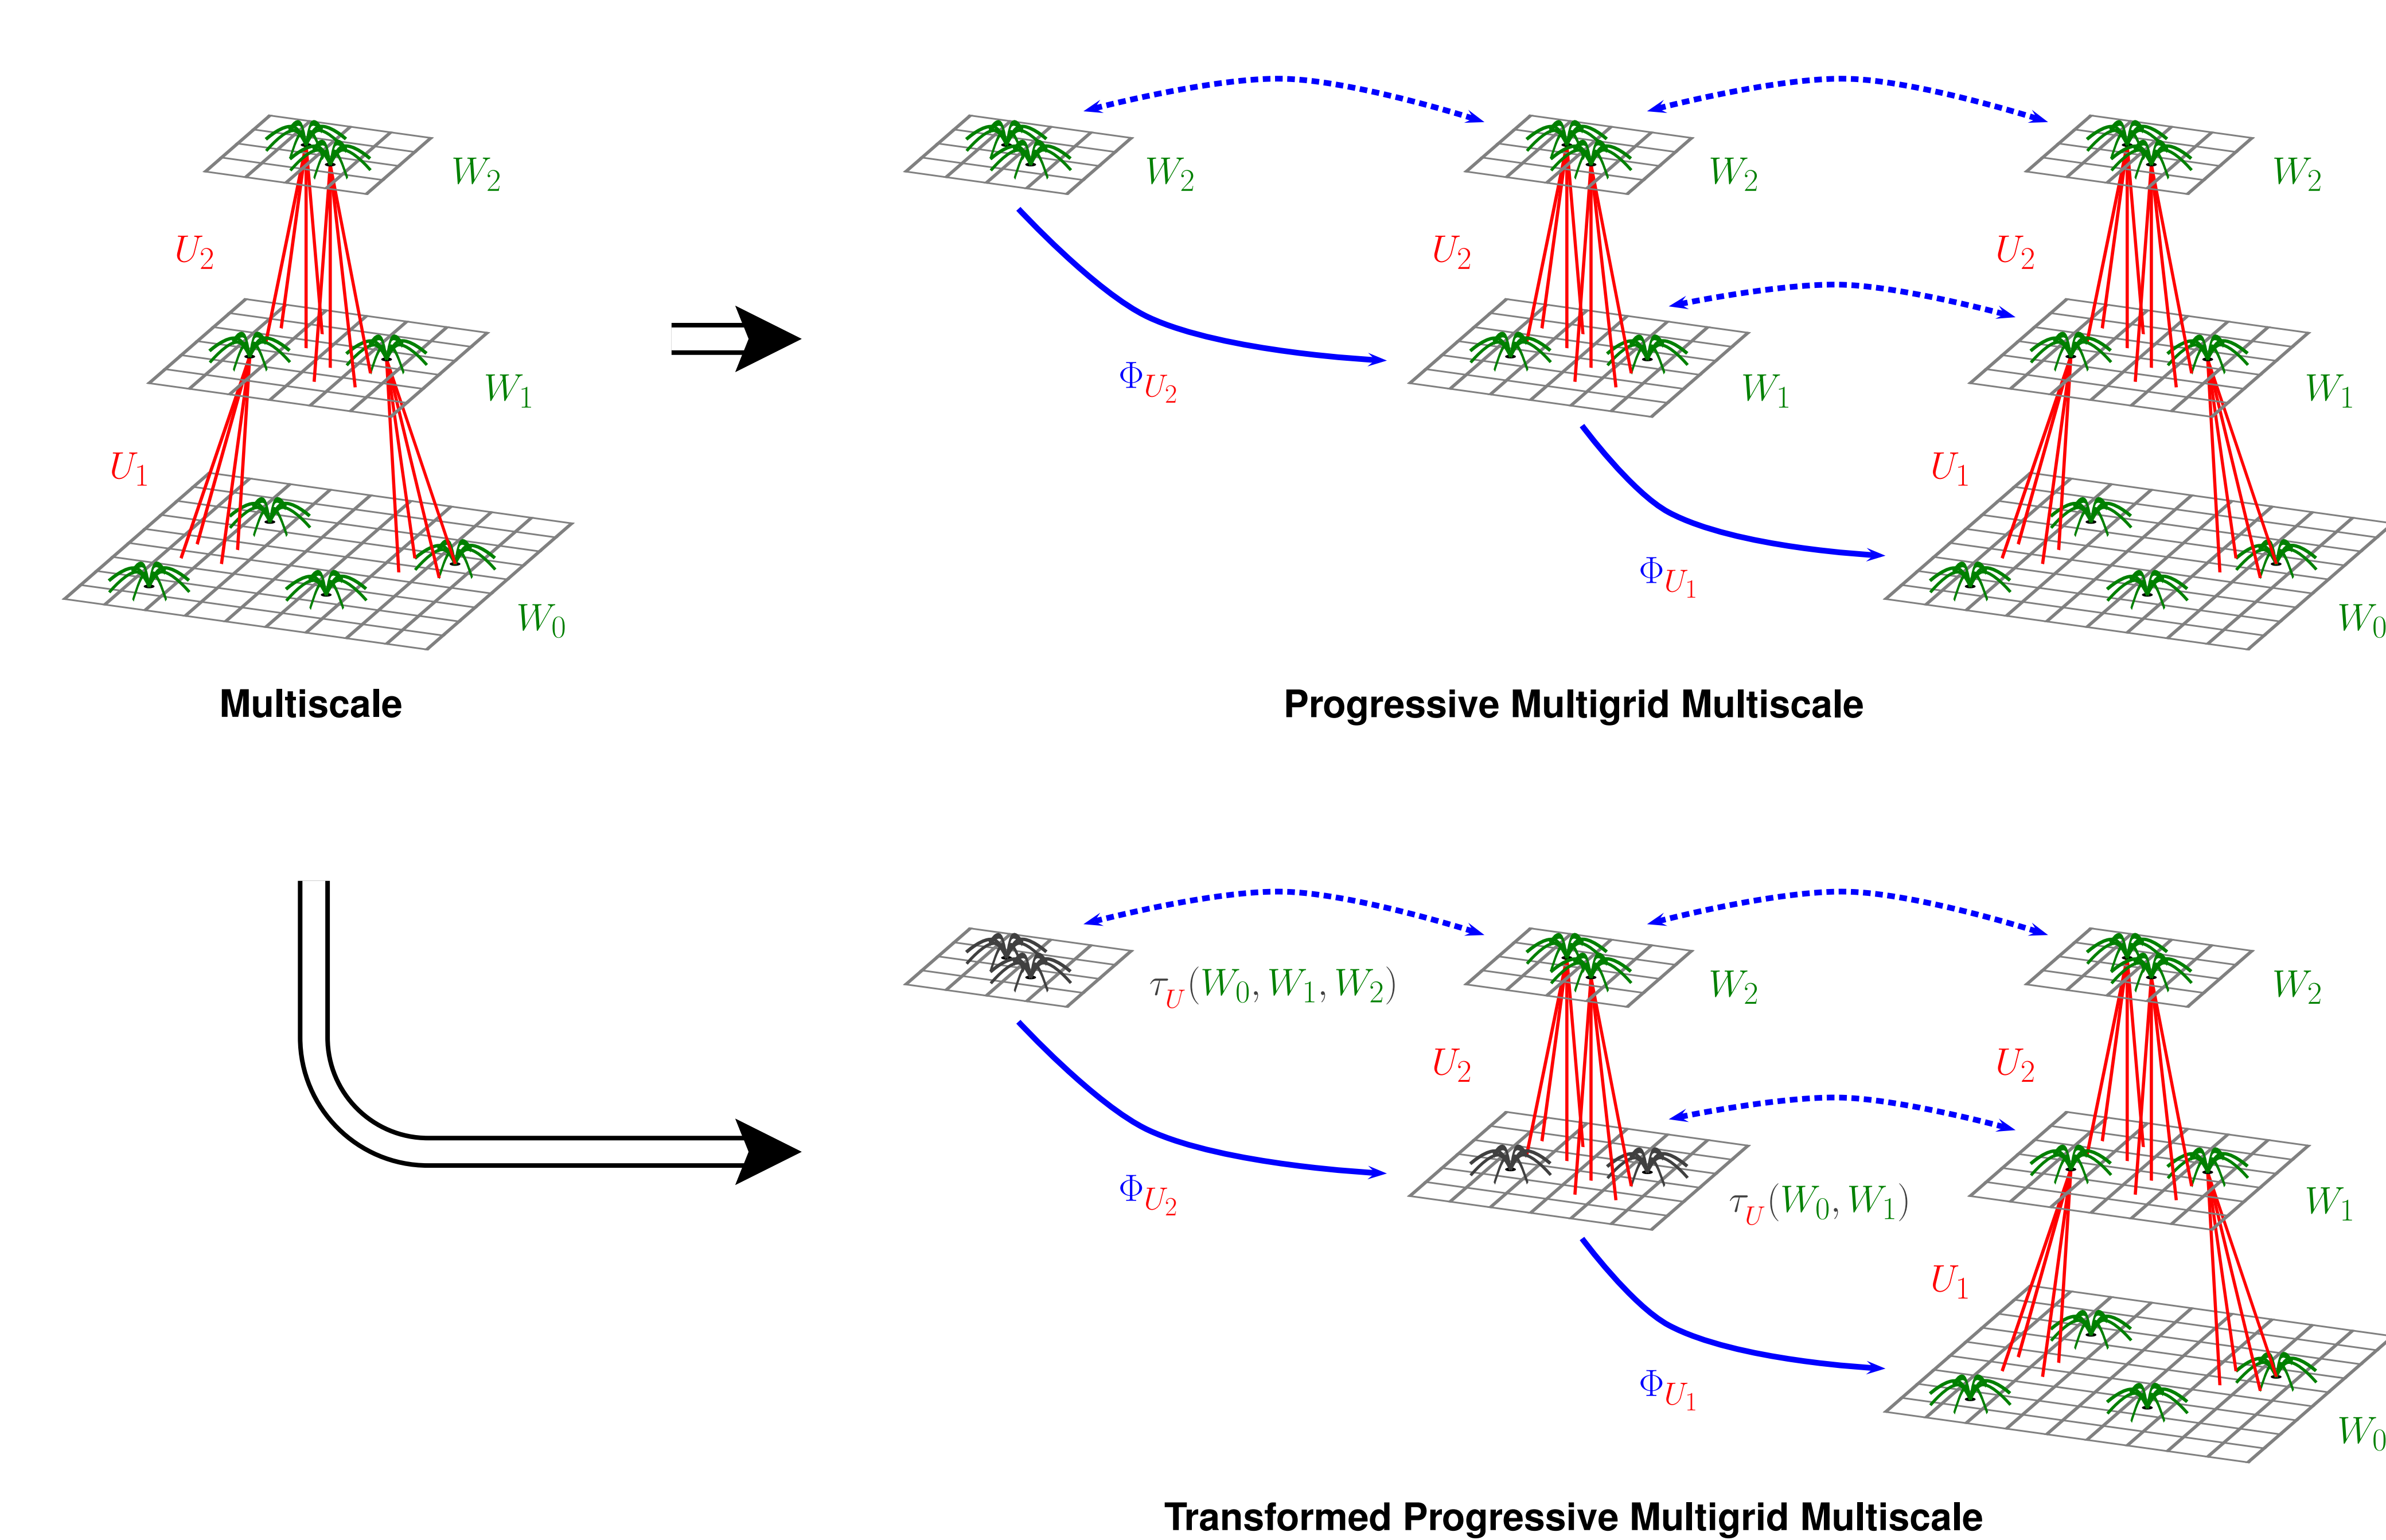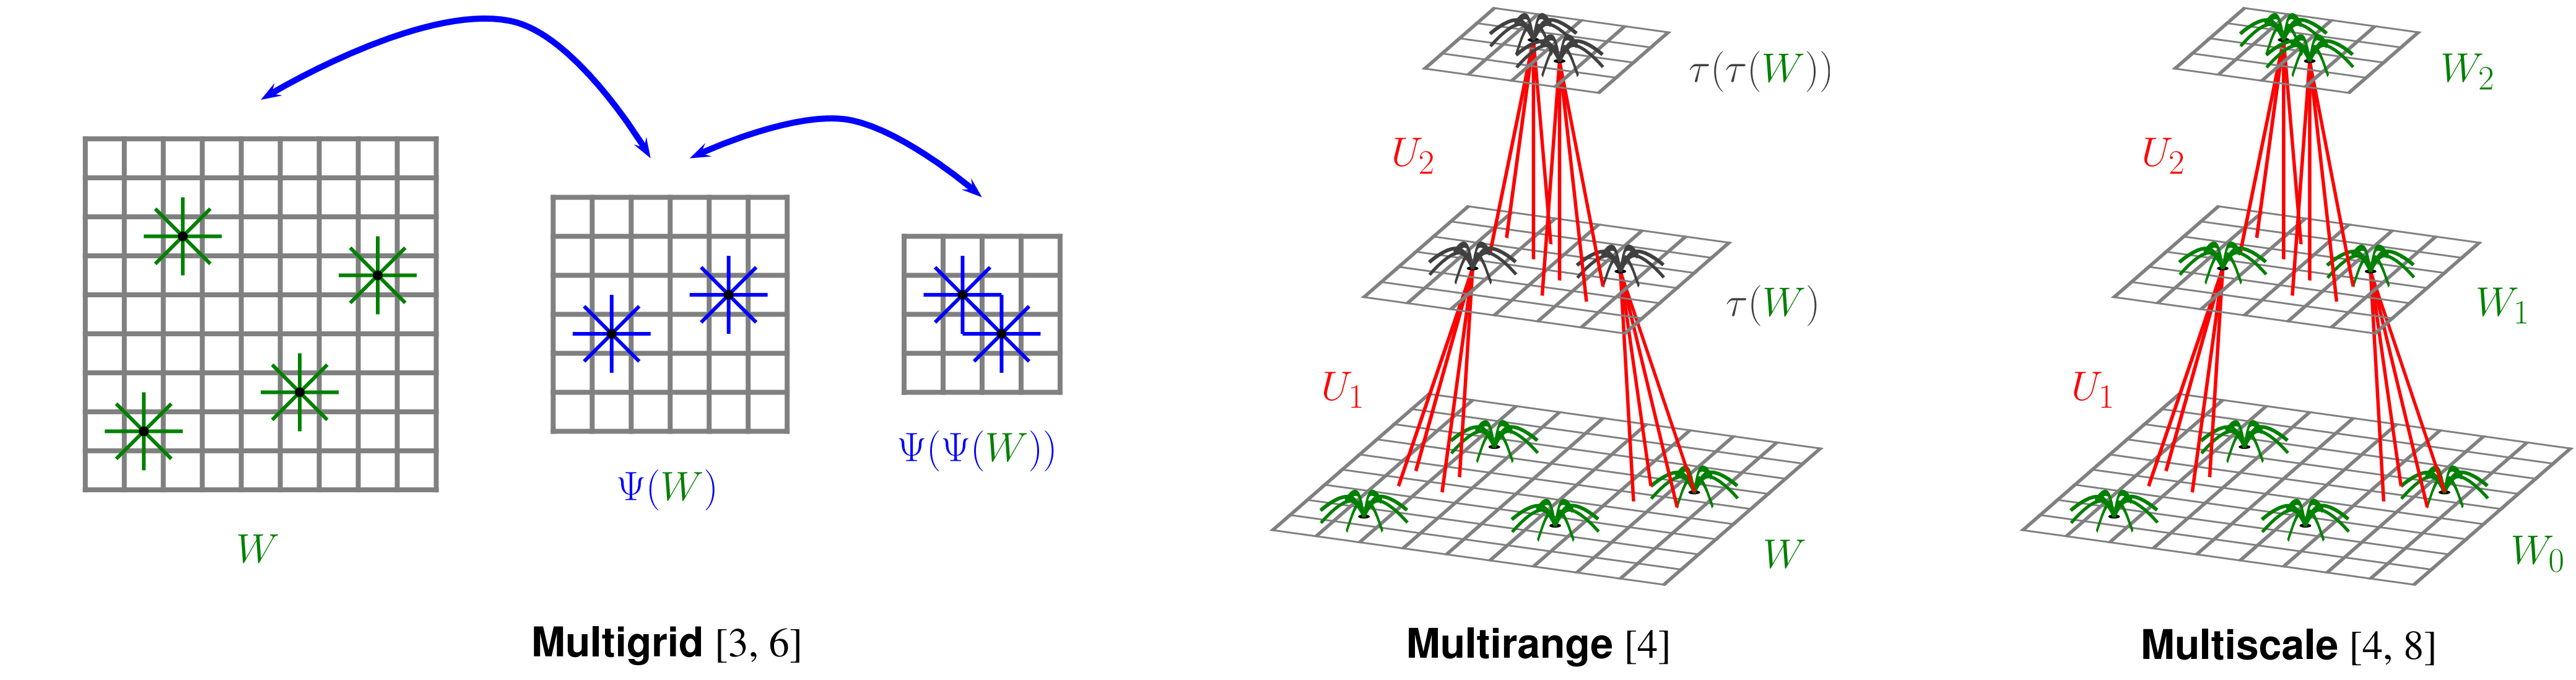

Multiscale Constrained Angular Embedding


Let (C, Θ, U) define a constrained Angular Embedding (AE) problem by specifying relationships between n graph nodes:

Θ : $n \times n$ pairwise relative ordering matrix

C : $n \times n$ pairwise confidence matrix

U : $n \times u$ matrix of u linear constraints

AE recovers global ordering $\theta(p)$ by embedding: $p \rightarrow z = e^{i\theta(p)}$

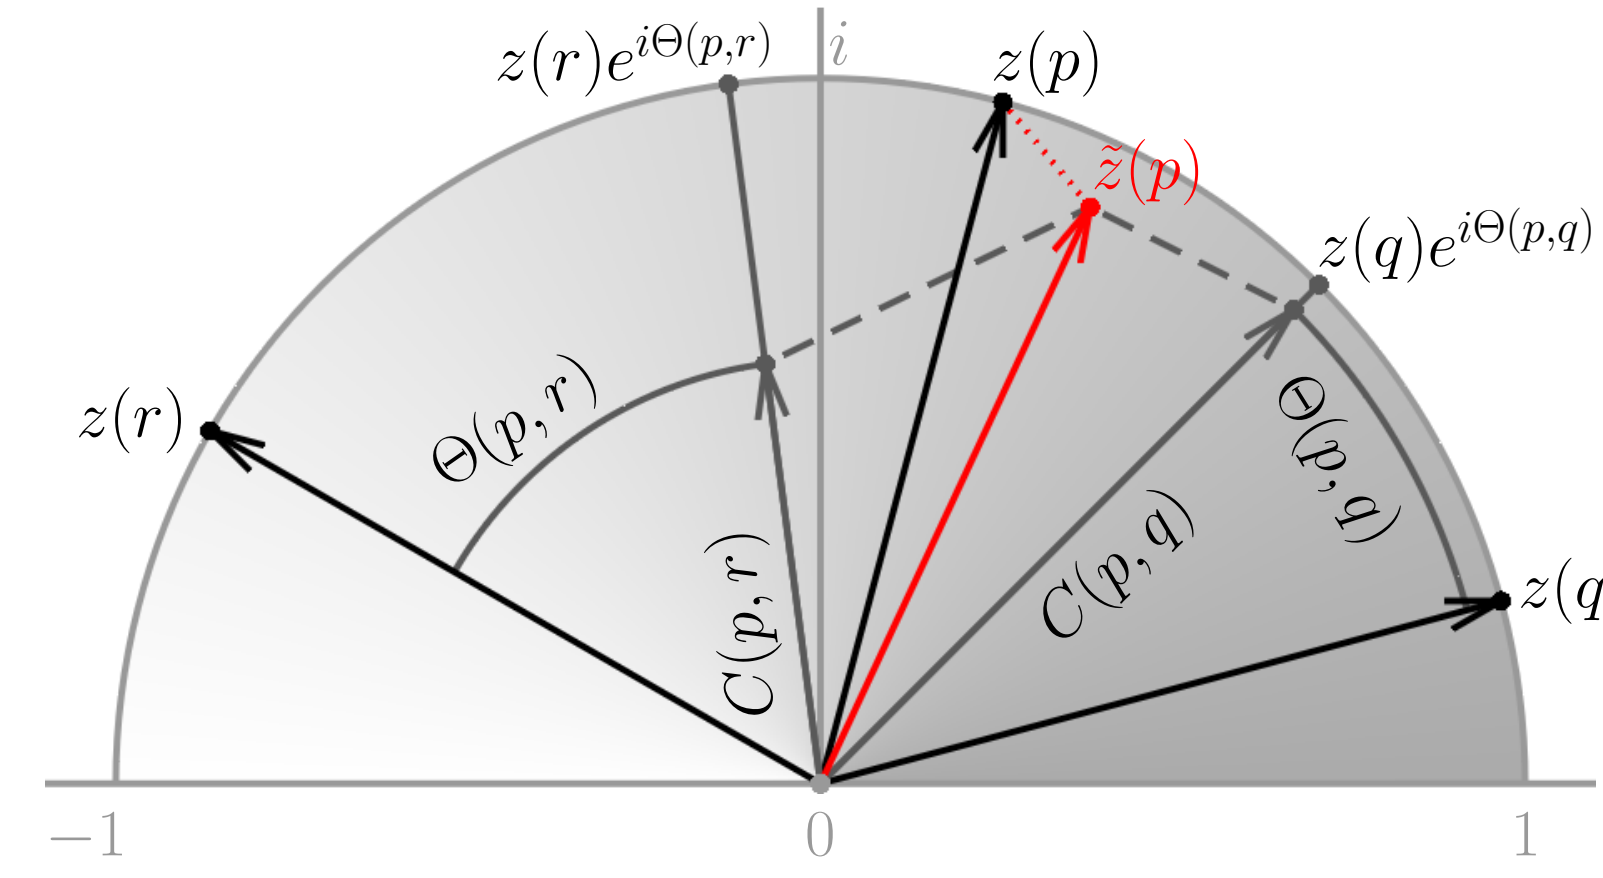

Minimize: $\varepsilon = \sum_p \sum_{q: p \neq q} \frac{C(p, q)}{C(p, q)} \cdot |z(p) - \tilde{z}(p)|^2$ (s.t. $U^*z = 0$)

Relax to generalized eigenproblem $QPQz = \lambda z$ where:

$$P = D^{-1}W$$

$$Q = I - D^{-1}U(U^TD^{-1}U)^{-1}U^T$$

with: $D = \text{diag}(C1)$ and $W = C \bullet \exp(i\Theta)$

Eigensolver using Randomized Matrix Approximation

Fixed Rank Problem:

Given: $n \times n$ sparse matrix M

Find: $n \times l$ dense matrix A , where $l = 2m \ll n$

Such that: range of A approximates range of M

Randomized Subspace Iteration [5]:

Draw $n \times l$ Gaussian matrix Ω

$Y \leftarrow (MM^*)^q M\Omega$ increase q until convergence[†]

$A \leftarrow \text{QR-ORTHONORMALIZE}(Y)$

Coarse-to-Fine Interpolation:

Find A_1 approximating M_1 via subspace iteration

Write A approximating M_0 as: $A = [A_1; A_0]$

Look at constraint: $U^*A = 0$

Rewrite as: $[U_{[n_1]}; U_{[n_0]}]^* [A_1; A_0] = 0$

Least-squares interpolate: $\tilde{A}_0 = U_{[n_0]}(U_{[n_0]}^*U_{[n_0]})^{-1}(-U_{[n_1]}^*A_1)$

Use $\tilde{A} = [A_1; \tilde{A}_0]$ as starting guess in subspace iteration for A

Eigensolver:

$B \leftarrow A^*MA$

$(V, \Lambda) \leftarrow \text{EIGS}(B, m)$

$Z \leftarrow AV$

$l \times l$ matrix

small eigenproblem

m leading eigenvectors

Convergence Check:

Evolve two independent bases $\hat{A}$ and $\check{A}$ of sizes l and r

Check whether the l space contains the r vectors: $E \leftarrow \check{A} - \hat{A}\hat{A}^*\check{A}$

Return reconstruction error: $\tau = \max_{j=0, \dots, r-1} \|E_{[0:(n-1), j]}\|$

[†] Avoid explicit computation of M . See paper for details.

Multiscale:

- Upgrade C, Θ, U to arrays $\mathbf{C}, \mathbf{\Theta}, \mathbf{U}$, indexed by level s

- Pairwise relationships restricted to be within-level:

n_s is the # of nodes in level s

$\tilde{n}_s = \sum_{\hat{s} \geq s} n_{\hat{s}}$ is the cumulative # of nodes in levels s and coarser

$\mathbf{C}_s, \mathbf{\Theta}_s$ are $n_s \times n_s$ matrices

- Constraints organized into incremental sets:

u_s is the # of additional constraints at level s

$\tilde{u}_s = \sum_{\hat{s} \geq s} u_{\hat{s}}$ is the cumulative # of active constrains at level s

$\mathbf{U}_s$ is an $\tilde{n}_s \times u_s$ matrix

$\mathbf{U}_s$ involves only nodes appearing at levels s and coarser

- Extract problem on sub-pyramid:

$\mathbf{C}_s \leftarrow \text{Diag}(\mathbf{C}_{s_{\max}}, \dots, \mathbf{C}_s)$

$\mathbf{\Theta}_s \leftarrow \text{Diag}(\mathbf{\Theta}_{s_{\max}}, \dots, \mathbf{\Theta}_s)$


$\mathbf{U}_s \leftarrow [\mathbf{U}_{s_{\max}}; \dots; \mathbf{U}_s]$

Compute $\mathbf{D}_s, \mathbf{W}_s$ from $\mathbf{C}_s, \mathbf{\Theta}_s$

Define $\mathbf{M}_s = \mathbf{Q}_s \mathbf{P}_s \mathbf{Q}_s$

- Leading eigenvectors of $\mathbf{M}_0$ solve the full multiscale problem


Multigrid: solve $\mathbf{M}_s$ to assist solution of $\mathbf{M}_{s-1}$

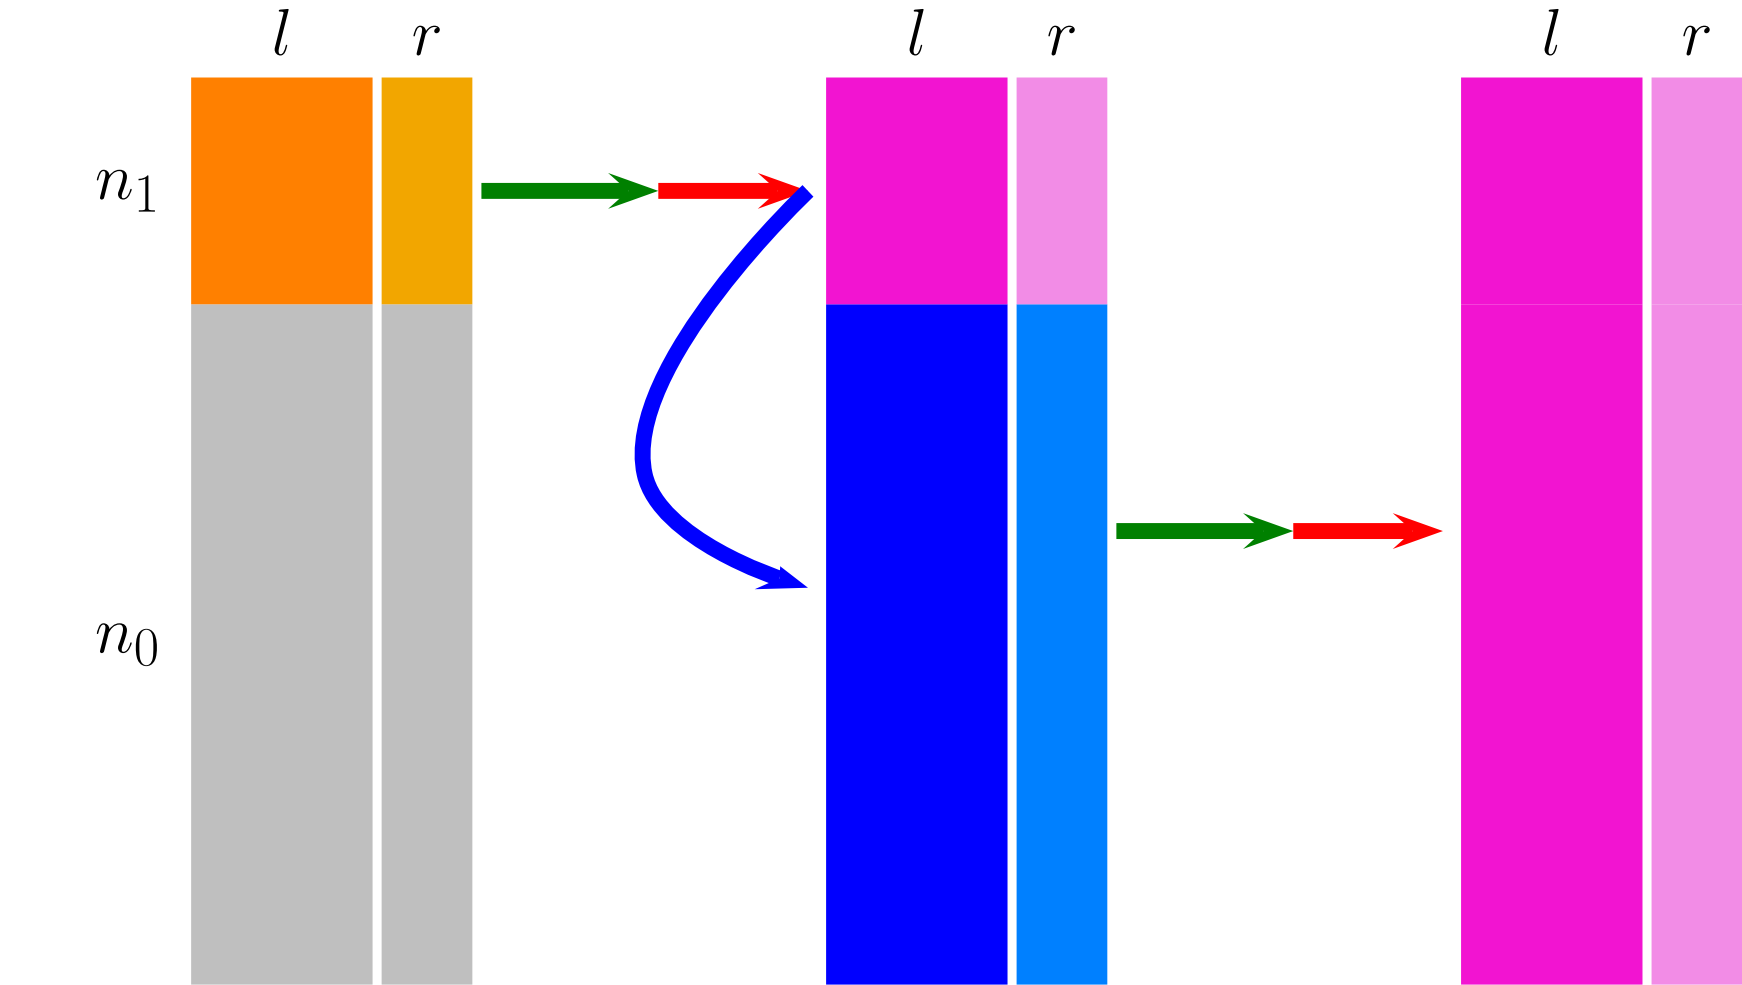


Diffuse: $A = D^{-\frac{1}{2}} W D^{-\frac{1}{2}} A$

Project: $A = (I - D^{-\frac{1}{2}} U (U^* D^{-1} U)^{-1} U^* D^{-\frac{1}{2}}) A$

Interpolate: $A = [A; D^{\frac{1}{2}} U_{[n_0]} (U_{[n_0]}^* U_{[n_0]})^{-1} (-U_{[n_1]}^* D^{-\frac{1}{2}} A)]$

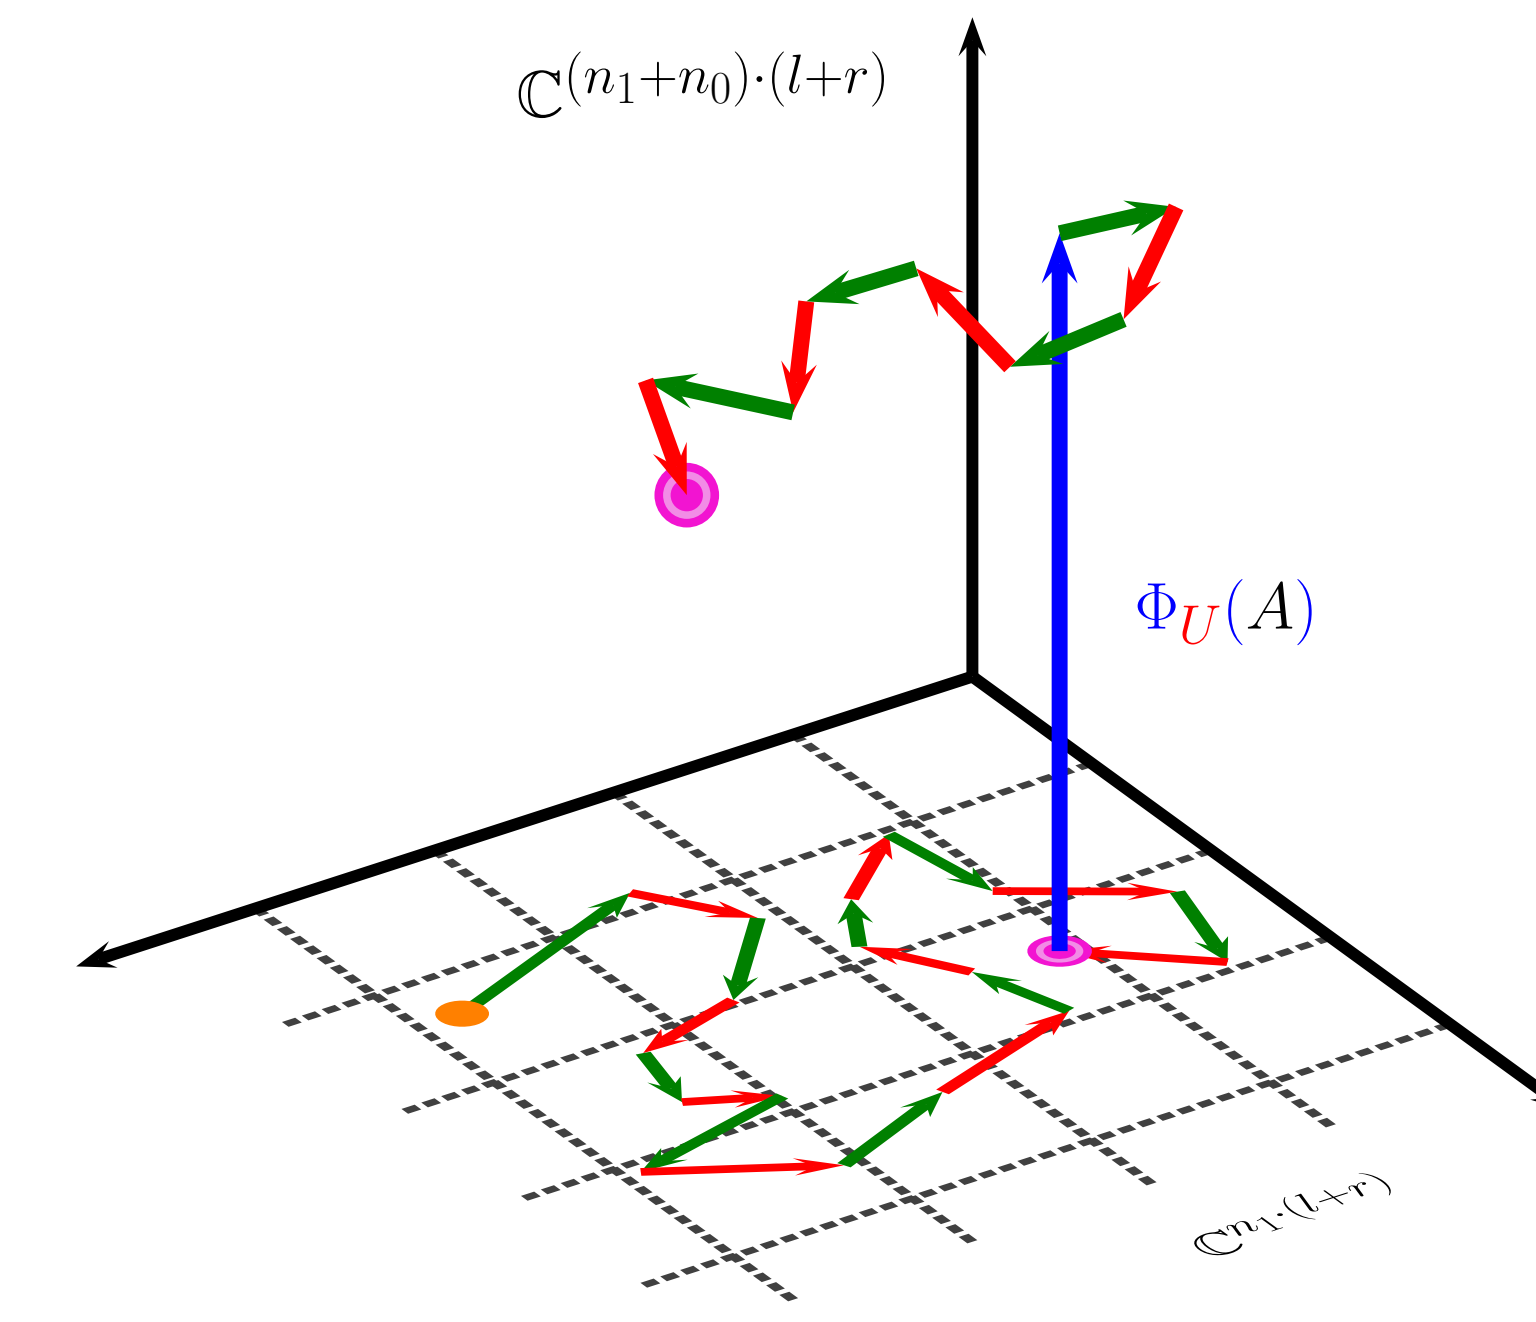


Eigenvector Convergence Comparison

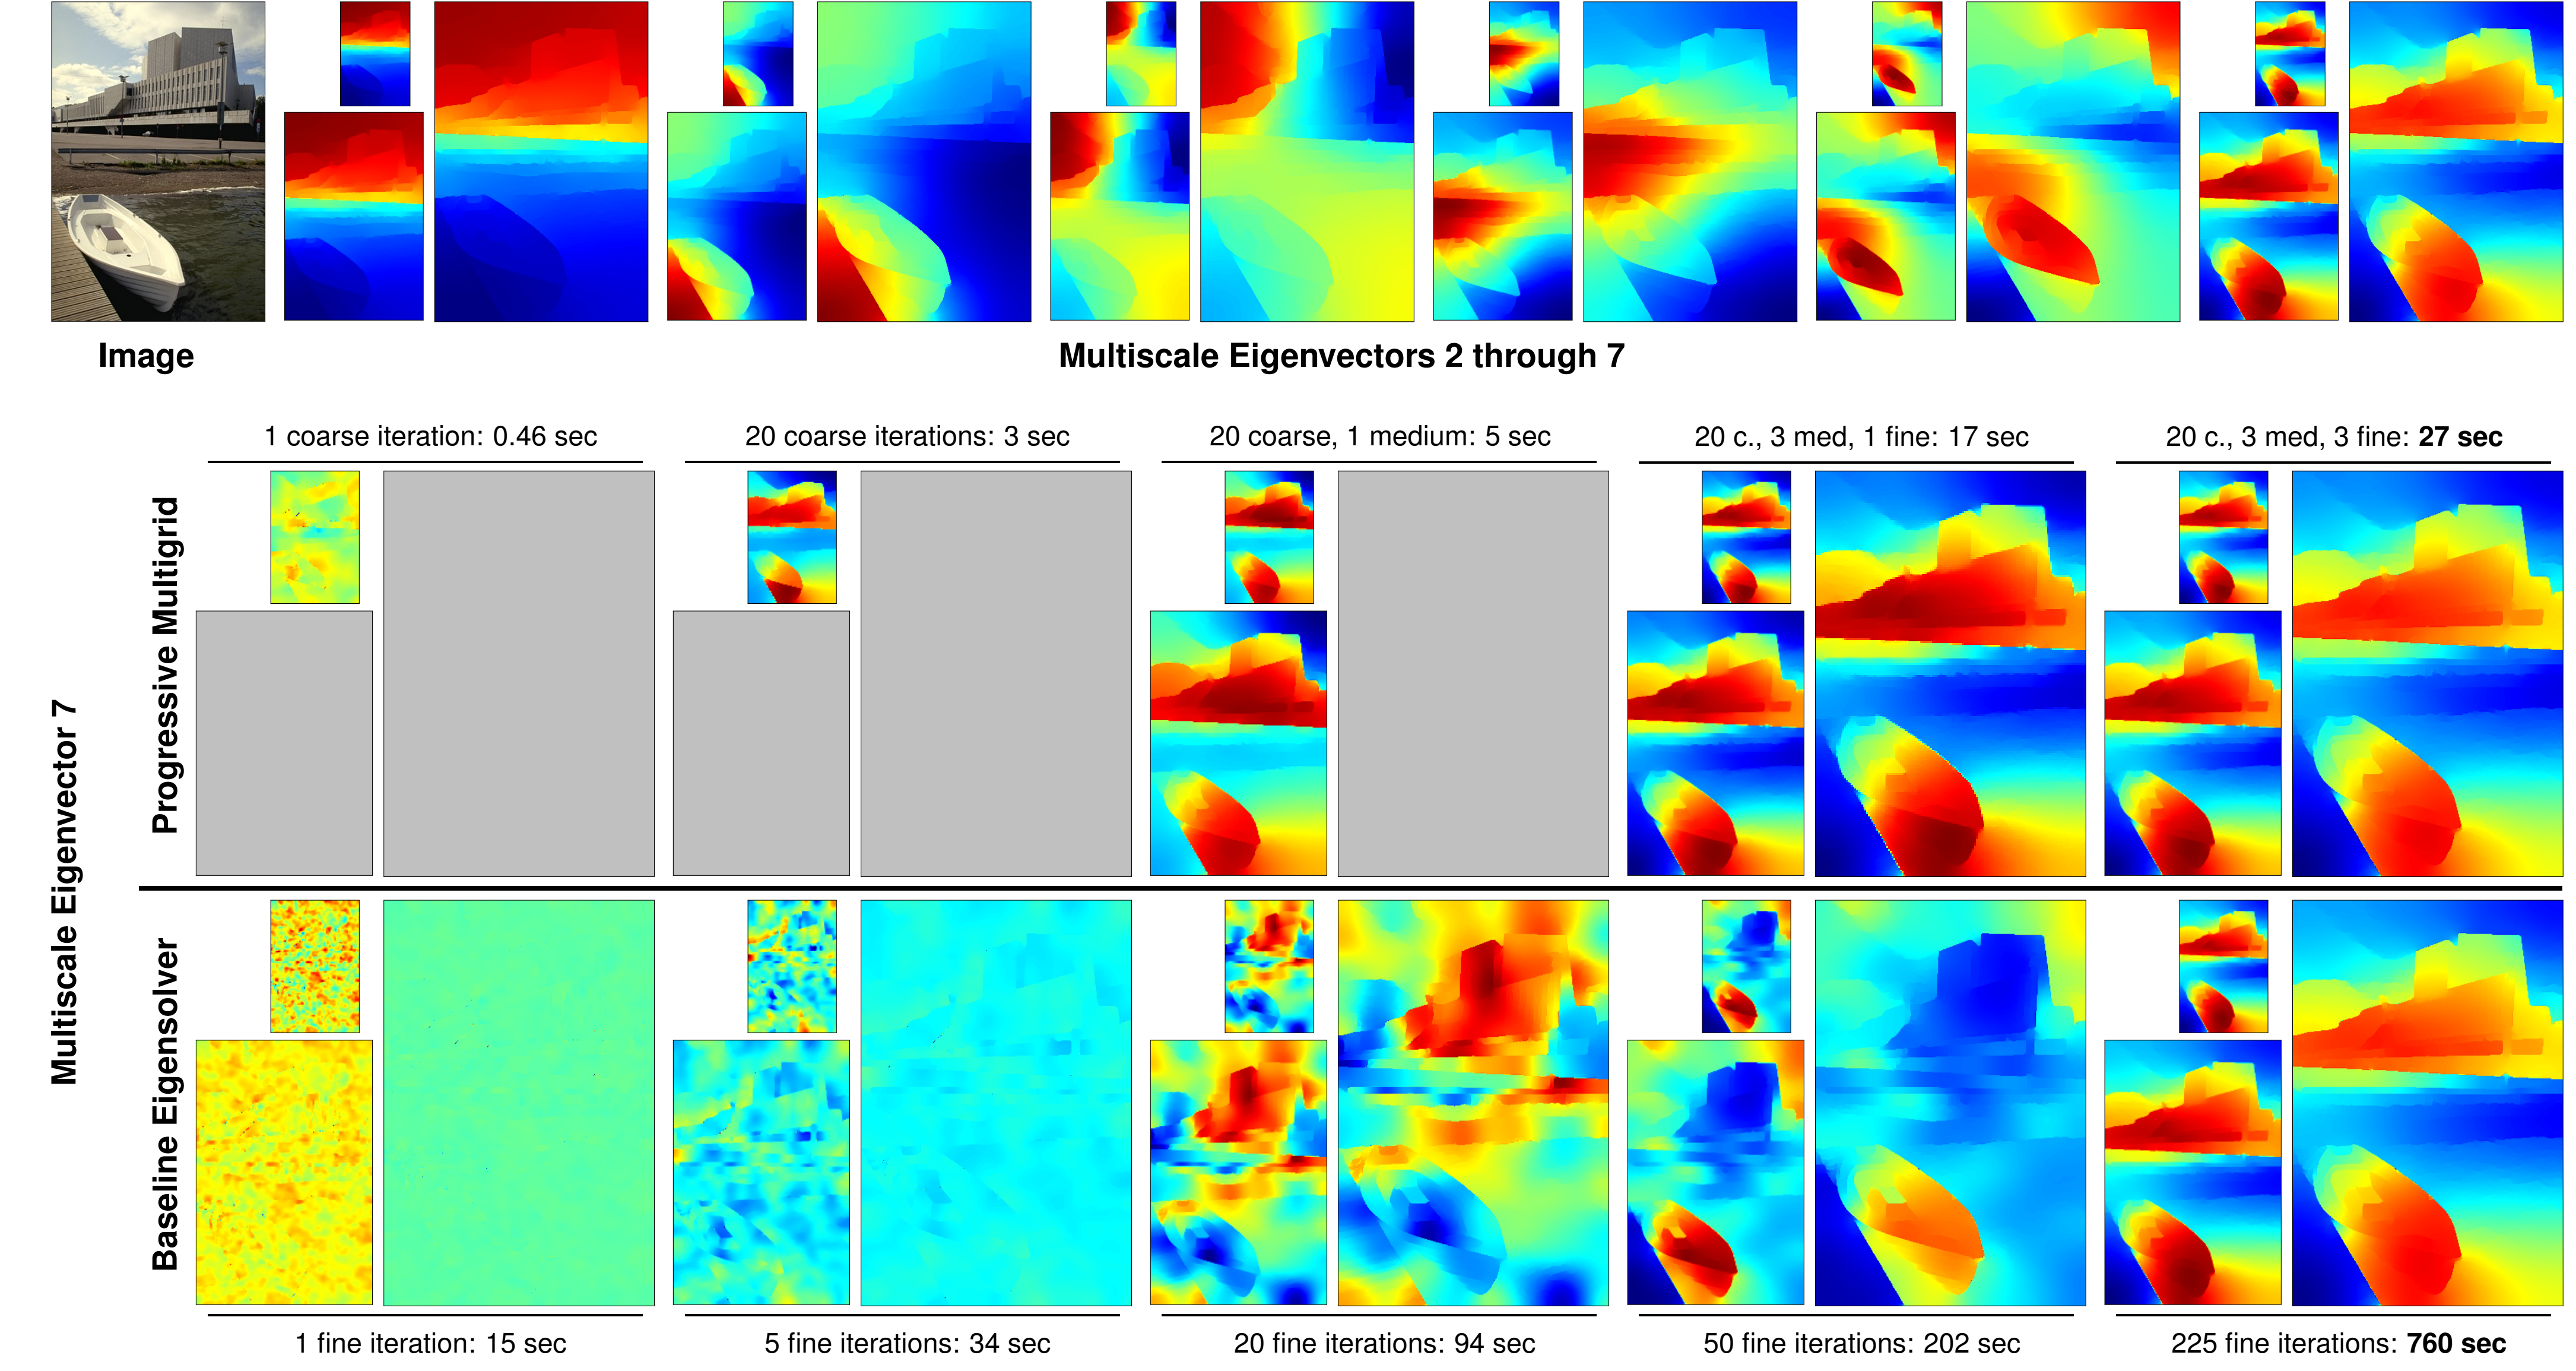


Our solver processes coarse-to-fine sub-pyramids, converging far faster (27 sec vs 760 sec) than the baseline solver, which starts work on the finest pyramid.

Multiscale Spectral Pb

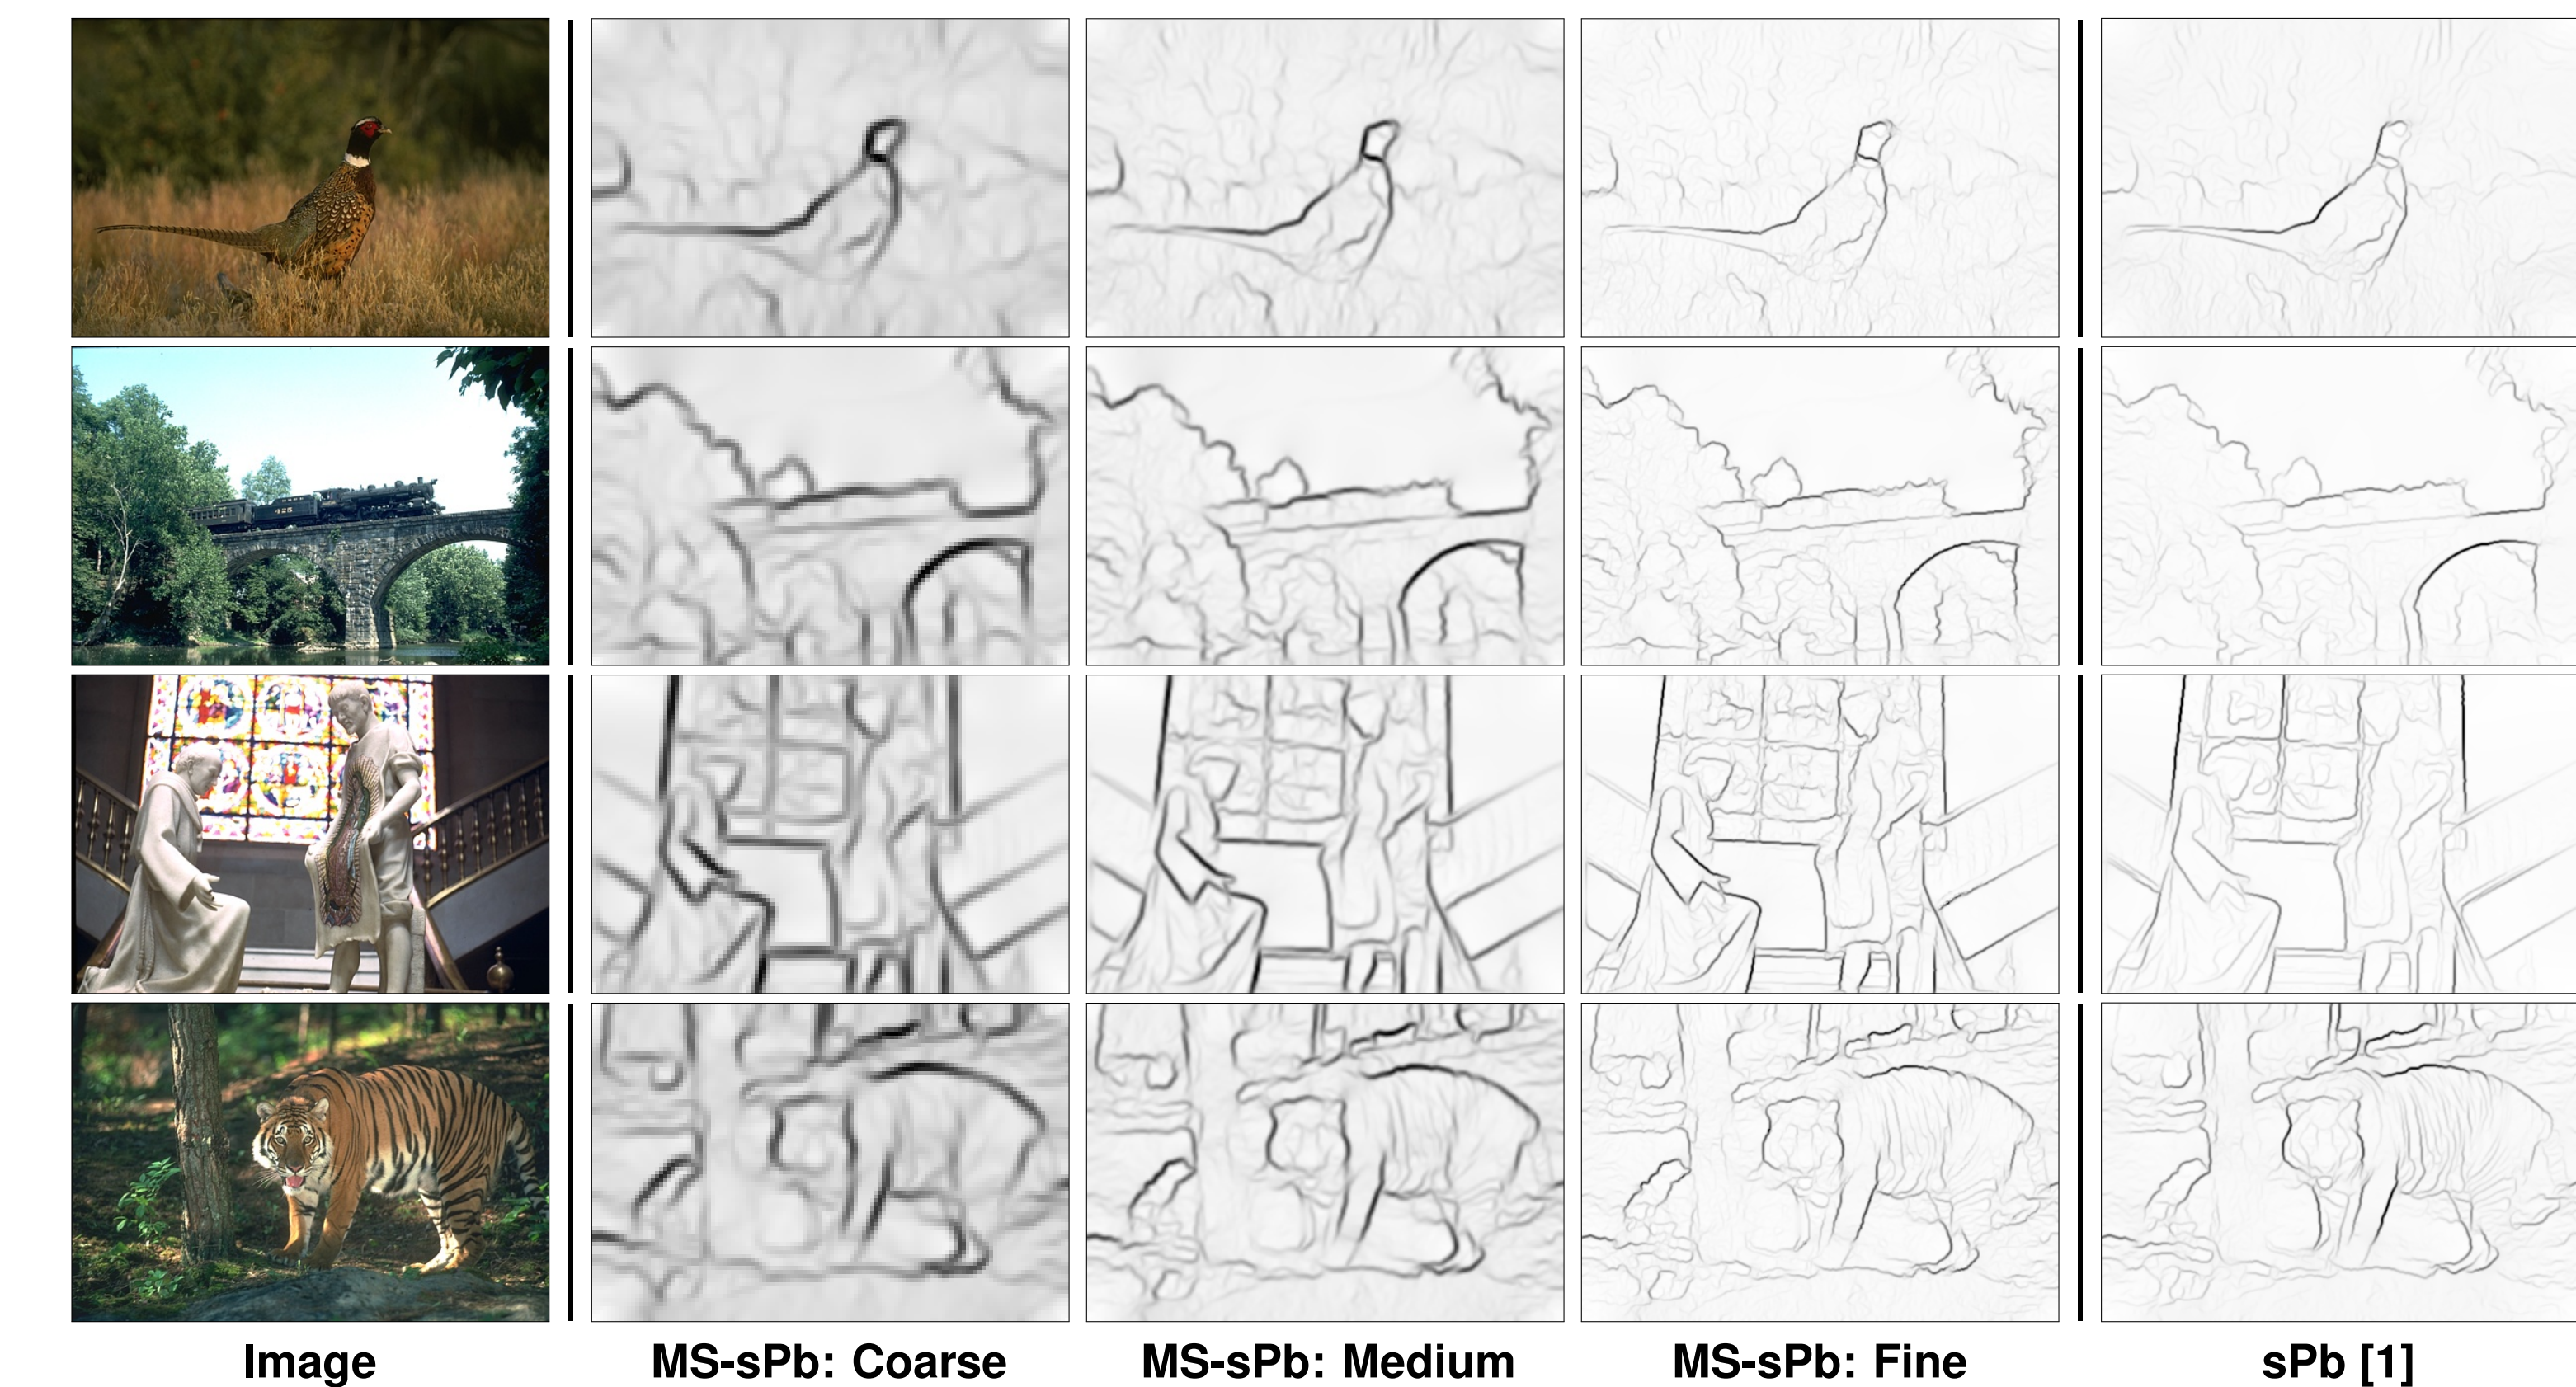

Our eigenvectors live on an image pyramid and produce consistent coarse-to-fine boundaries across scale-space.

Runtime

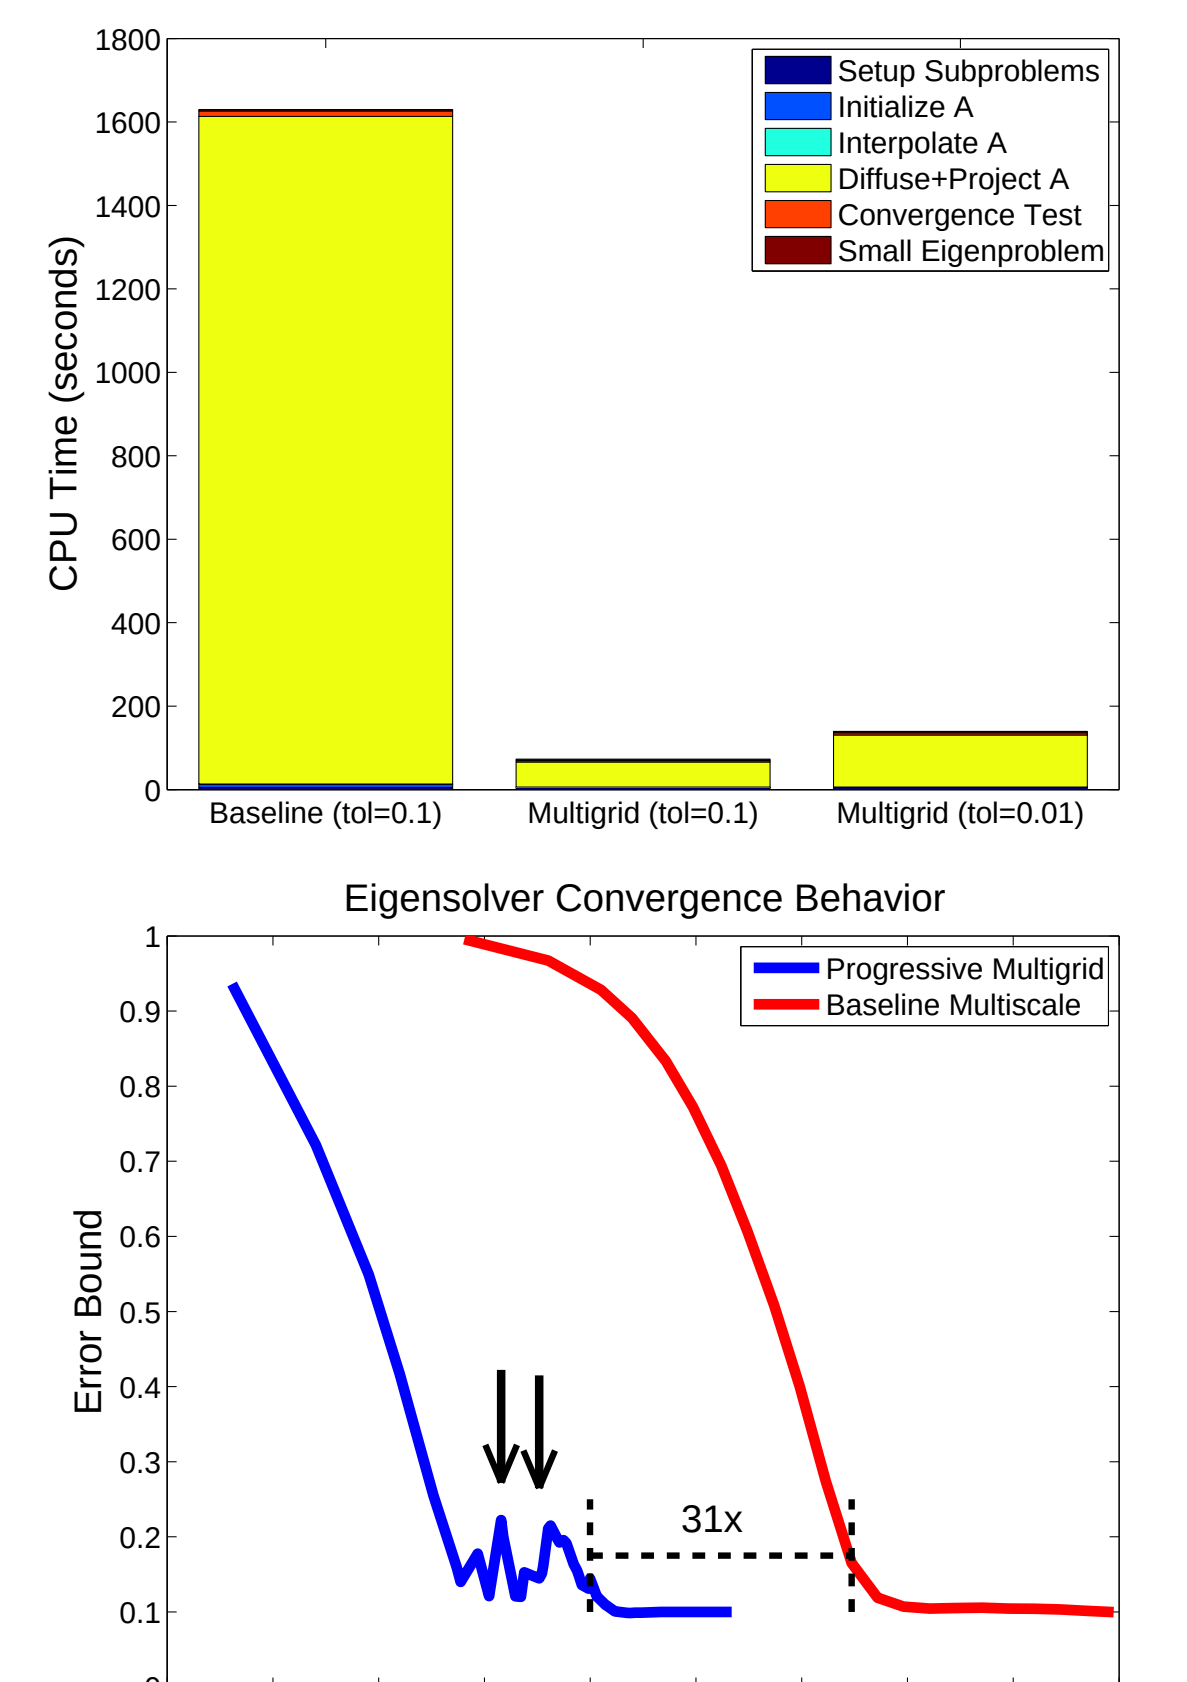

- [1] P. Arbeláez, M. Maire, C. Fowlkes, and J. Malik. Contour Detection and Hierarchical Image Segmentation. *PAMI*, 2011.
- [2] B. Catanzaro, B.-Y. Su, N. Sundaram, Y. Lee, M. Murphy, and K. Keutzer. Efficient, High-Quality Image Contour Detection. *ICCV*, 2009.
- [3] C. Chennubhotla and A.D. Jepson. Hierarchical Eigensolver for Transition Matrices in Spectral Methods. *NIPS*, 2005.
- [4] T. Cour, F. Benezit, and J. Shi. Spectral Segmentation with Multiscale Graph Decomposition. *CVPR*, 2005.
- [5] N. Halko, P.-G. Martinsson, and J. A. Tropp. Finding Structure with Randomness: Probabilistic Algorithms for Constructing Approximate Matrix Decompositions. *SIREV*, 2011.
- [6] D. Kushnir, M. Galun, and A. Brandt. Efficient Multilevel Eigensolvers with Applications to Data Analysis Tasks. *PAMI*, 2010.
- [7] M. Maire, S.X. Yu, and P. Perona. Object Detection and Segmentation from Joint Embedding of Parts and Pixels. *ICCV*, 2011.
- [8] S.X. Yu. Segmentation Induced by Scale Invariance. *CVPR*, 2005.
- [9] S.X. Yu. Angular Embedding: A Robust Quadratic Criterion. *PAMI*, 2012.
- [10] S.X. Yu and J. Shi. Segmentation Given Partial Grouping Constraints. *PAMI*, 2004.